
MIL-F-21346/14A
18 October 1976
SUPERSEDING
MIL-F-21346/14(SHIPS) 1/
22 November 1971

MILITARY SPECIFICATION SHEET

FUSEHOLDER, SHROUD TYPE; STYLE FH 80, 100-200-AMP, 1000-VOLT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

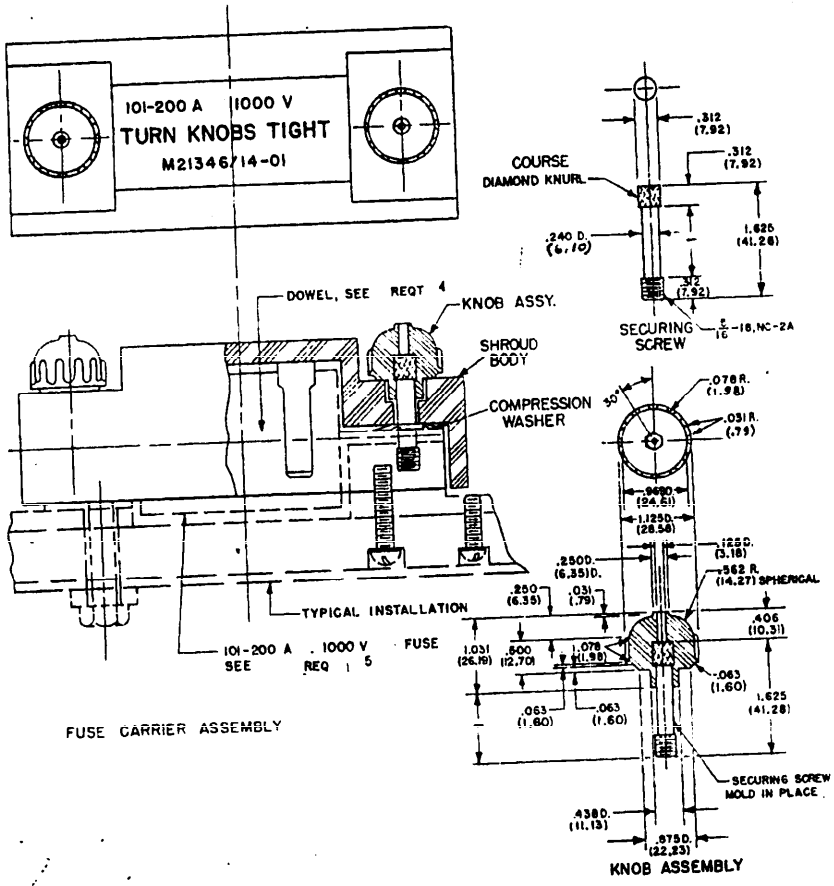


1/ Requirements formerly carried on Drawing 9000-56202-74499.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Ship Engineering Center, Center Building, SEC 6124, Prince Georges Center, Hyattsville, Maryland 20782 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:21Z
Check the source to verify that this is the current version before use.

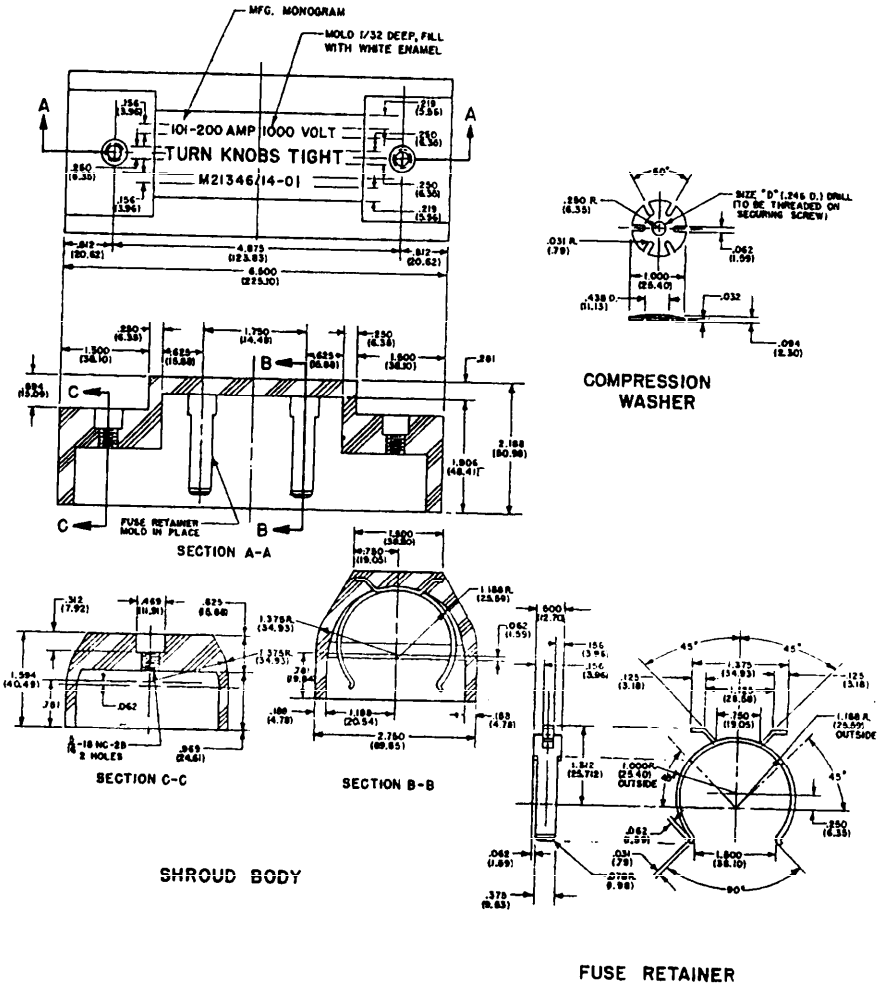

REQUIREMENTS:

1. All dimensions are in inches, millimeters are in parentheses.
2. Unless otherwise specified, tolerances shall be ±0.005 (0.13) for decimals.
3. Tolerances for angles shall be ±1/2 degree.
4. Material:
   - Shroud body: Molded plastic type MFI-20.
   - Knob: Molded plastic type MFI-20.
   - Securing screw: Corrosion resisting steel in accordance with QQ-S-763.
   - Fuse retainer: Phosphor-bronze.
   - Dowel: Wood, 2-inch (50.8) diameter, 2.875 inches (73.03) long. Shall be assembled in the fuse carrier.
5. The electrical rating shall be 200 A at 1000 volts.
6. Insulation resistance: Insulation resistance shall be not less than 200 megohms when subjected to test condition C of Test Method 302 of MIL-STD-202. This test shall be conducted immediately following the moisture resistance test.
7. Vibration: Vibration test shall be conducted in accordance with Test Method 201 of MIL-STD-202 with the fuse installed.
8. This fuseholder is for use with fuse style F72 of MIL-F-15160/72. Fuses will not be furnished.
9. The military part no. for style FH80 is M21346/14-01.
10. Markings may be in accordance with the applicable superseded drawing, however, wher the molds require reworking or replacing, the identification marking shall be changed to conform to this specification.
11. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:21Z
Check the source to verify that this is the currentversion before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH

(Project 5920-0340)

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - MI, EA, MU
Navy - EC
Air Force - 17, 80
DSA - ES

User activities:
Army - WC, AT
Navy - MC, AS, CG
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:21Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U.S. GOVERNMENT PRINTING OFFICE: 1972—714-863/3404 2-1

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:21Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF NAVY

DOD 316

U.S. MAIL

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:21Z
Check the source to verify that this is the current version before use.