
MIL-F-21346/1F
15 May 1986
SUPERSEDING
MIL-F-21346/1E
18 October 1976

MILITARY SPECIFICATION SHEET

FUSE CLIP, ELECTRICAL; STYLES FC21, FC22, FC23, AND FC25

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fuse clips described herein shall consist of this document and the latest issue of MIL-F-21346.

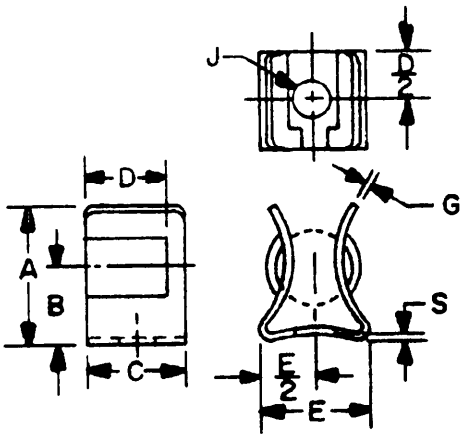

SH 13202319

FIGURE 1. Style FC21 electrical fuse clip.

(F) Denotes changes.

FSC 5920

AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

	Military part no. M21346/1	Type designation no. 1/	Nominal fuse size dia.	Current rating A	A max	B min	C	D min	E max	G	J	S	For use with fuse style 2/
	-01	FC21AN	1/4	30	0.50 (12.7)	0.23 (5.8)	0.31 (7.9)	0.23 (5.8)	0.34 (8.6)	0.020 (.51)	0.131 (3.33)	0.005 (.13)	F01, F02, F03
F	-02	FC21BN	9/32		.58 (14.7)	.31 (8.1)	.41 (10.4)	.34 (8.6)	.43 (10.9)		.171 (4.34)		F05, F06
F	-03	FC21CN	13/32		.80 (20.3)	.45 (11.4)	.44 (11.2)	.36 (9.1)	.51 (13.0)	.020 (.51)	.196 (4.98)	.005 (.13)	F07, F09, F10, F27, F28, F60
F	-04	FC21CF	13/32			.47 (11.9)				.028 (.71)		.028 (.71)	
F	-05 -06	FC21DN FC21DF	9/16		.96 (24.4)	.52 (13.2)	.59 (15.0)	.49 (12.4)	.66 (16.8)	.028 (.71)	.219 (5.56)	.015 (.38)	F15, F51
	-07 -08	FC21EN FC21EF	13/16	60	1.31 (33.3)	.76 (19.3)	.72 (18.3)	.61 (15.5)	.90 (22.9)	.045 (1.14)	.265 (6.73)		F16, F29, F30, F62


1/ Material: "N" designates nonferrous and "F" copper clad steel.
2/ See MIL-F-15160.

REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be plus or minus 0.02 (0.5) and plus or minus 0.005 (0.13) on three place decimals.
4. Nonferrous material shall be copper-beryllium.
5. Finish shall be bright alloy plate for ratings 30 amperes and silver plate for ratings 60 amperes except copper clad steel clips shall be given a copper flash plating before the finish, and the finish plate may be hot tin dip in lieu of bright alloy or silver.
6. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
7. The tolerance of dimension G shall be ± 0.0025 for part no. M21346/1-03.

FIGURE 1. Style FC21 electrical fuse clip. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

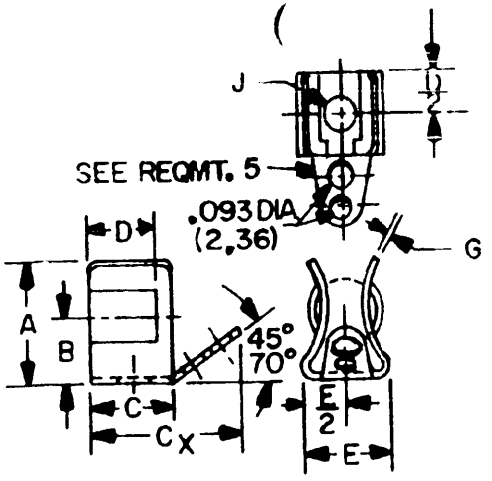

	Military part no. M21346/1	Type designation no. 1/	Nominal fuse size dia.	Current rating A	A max	B min	C	C_x max	D min	E max	G	J	For use with fuse style 2/
(F)	-09	FC22AN	1/4	30	0.50 (12.7)	0.23 (5.8)	0.31 (7.9)	.63 (16)	0.23 (5.8)	0.34 (8.6)	0.020 (.51)	0.131 (3.33)	F01, F02, F03
	-10	FC22BN	9/32		.58 (14.7)	.32 (8.1)	.41 (10.4)	.59 (15.0)	.35 (8.9)	.43 (10.9)		.171 (4.34)	F05, F06
(F)	-11	FC22CN	13/32		.80 (20.3)	.45 (11.4)	.44 (11.2)	.78 (19.8)	.36 (9.1)	.51 (13.0)	.020 (.51)	.196 (4.98)	F07, F09, F10, F27, F28, F60
	-12	FC22DN	9/16		.96 (24.4)	.54 (13.7)	.61 (15.5)	.88 (22.4)	.52 (13.2)	.66 (16.8)	.028 (.71)	.219 (5.56)	F15, F61
	-13	FC22EN	13/16	60	1.31 (33.3)	.76 (19.3)	.76 (19.3)	.88 (22.4)	.61 (15.5)	.90 (22.9)	.045 (1.14)	.265 (6.73)	F16, F29, F30, F62

1/ Material: "N" designates nonferrrous.
2/ See MIL-F-15160.

SH 13202320


FIGURE 2. Style FC22 electrical fuse clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (for figure 2)

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be plus or minus 0.02 (0.5) and plus or minus 0.005 (0.13) on three place decimals.
4. Nonferrous material shall be copper beryllium.
5. Solder lug terminal shall be formed integral with fuse clip.
6. Finish shall be bright alloy plate for ratings 30 amperes and silver plate for rating 60 amperes.
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
8. The tolerance of dimension G shall be $\pm$ 0.0025 for part no. M21346/1-11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

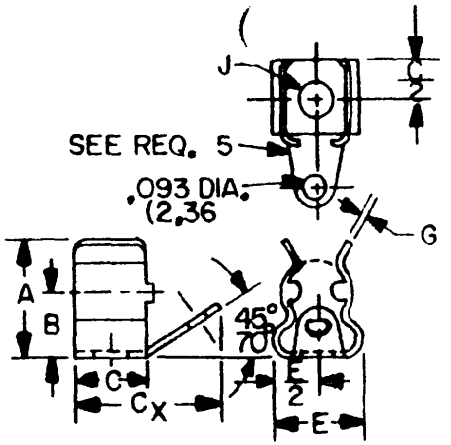

Military part no. M21346/1	Type designation no.1/	Nominal fuse size dia.	Current rating A	A max	B min	C	C_x	E max	G	J	For use with style2/
-14	FC23AN	1/4	30	0.50 (12.7)	0.23 (5.8)	0.33 (8.4)	0.58 (14.7)	0.34 (8.6)	0.020 (.51)	0.131 (3.33)	F01, F02, F03
-15	FC23BN	9/32		.58 (14.7)	.32 (8.1)	.43 (10.9)	.59 (15.0)	.43 (10.9)		.171 (4.34)	F05, F06
-16	FC23CN	13/32		.80 (20.3)	.47 (11.9)	.46 (11.7)	.76 (19.3)	.51 (13.0)	.028 (.71)	.196 (4.98)	F07, F09, F10, F27, F28, F60
-17	FC23DN	9/16		.96 (24.4)	.54 (13.7)	.61 (15.5)	.88 (22.4)	.66 (16.8)	.028 (.71)	.219 (5.56)	F15, F61
-18	FC23EN	13/16	60	1.31 (33.3)	.76 (19.3)	.76 (19.3)	.88 (22.4)	.90 (22.9)	.045 (1.14)	.265 (6.73)	F16, F29, F30, F62

1/ Material: "N" designates nonferrous.
2/ See MIL-F-15160.


SH 13202321

FIGURE 3. Style FC23 electrical fuse clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (for figure 3)

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be plus or minus 0.02 (0.5) and plus or minus 0.005 (0.13) on three place decimals.
4. Nonferrous material shall be copper beryllium.
5. Solder lug terminal shall be formed integral with fuse clip.
6. Finish shall be bright alloy plate for ratings 30 amperes and silver plate for ratings 60 amperes.
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

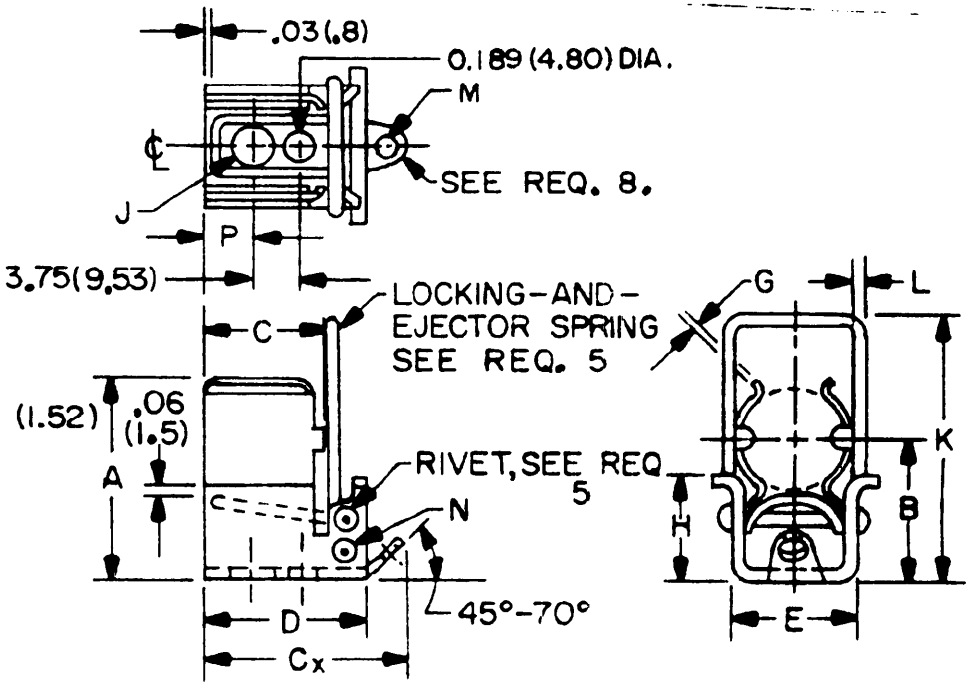

SH 13202322

FIGURE 4. Style FC25 electrical fuse clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

Military part no. M21346/1	Type designation no.	Nominal fuse size dia.	Current rating A	A ±0.03 (0.8)	B ±0.03 (0.8)	C	C_x ±0.06 (1.5)	D ±0.03 (0.8)	E ±0.03 (0.8)	G	H ±0.04 (1.0)	J	K ±0.03 (0.8)	L	M	N	P	For use with fuse 1/
-19	FC25AN	9/16	30	1.03 (26.2)	0.75 (19.1)	0.59 (15.0)	1.00 (25.4)	0.81 (20.6)	0.62 (15.7)	0.028 (.71)	0.56 (14.2)	0.208 (5.3)	1.56 (39.6)	0.062 (1.57)	0.093 (2.36)	0.093 (2.36)	0.25 (6.4)	F15, F61
-20	FC25BN	13/16	60	1.31 (33.3)	.94 (23.9)	.61 (15.5)	1.05 (26.7)	.88 (22.4)	.75 (19.1)	.045 (1.14)	.66 (16.8)	.236 (5.99)	1.94 (49.3)	.080 (2.03)	.125 (3.18)	.125 (3.18)	.31 (7.9)	F16, F29, F30, F62

1/ See MIL-F-15160.

REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be plus or minus 0.02 (0.5) and plus or minus 0.005 (0.13) on three place decimals.
4. Materials shall be phosphor bronze.
5. Material shall be corrosion resistant steel.
6. Finish shall be bright alloy for ratings 30 amperes and silver plate for 60 amperes.
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
8. Solder lug terminal shall be formed integral with the fuse clip.

FIGURE 4. Style FC25 electrical fuse clip. - Continued

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - MI
Navy - EC
Air Force - 99, 17
DSA - ES

User activities:
Army - EA, AR
Navy - MC, AS

Preparing activity:
Navy - SH
(Project 5920-0424)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.