MILITARY SPECIFICATION SHEET

FUSE CLIP, ELECTRICAL; STYLES FC40 and FC41

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuse clips described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

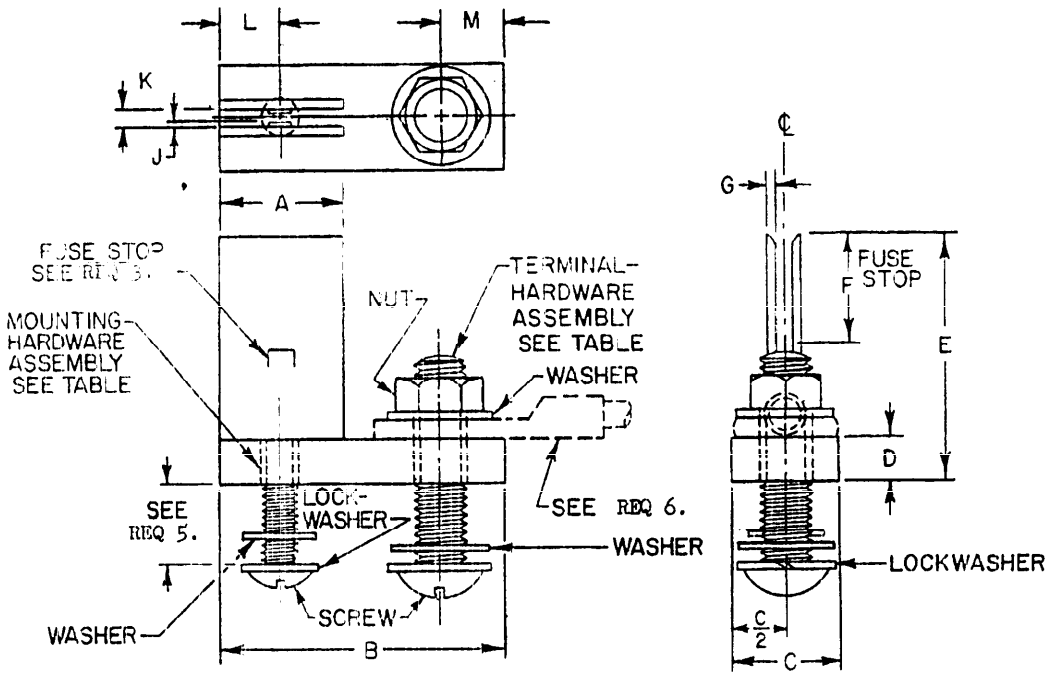


FIGURE 1. Style FC40 electrical fuse clip. - Continued

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Ship Engineering Center, Center Building, SEC 6124, Prince Georges Center, Hyattsville, Maryland 20782 by using the self-addressed Standardization Document Improvement Proposal Form (DD Form 1426) appearing at the end of this document or by letter.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:19Z
Check the source to verify that this is the current version before use.

Military part no. M21346/2	Type designation no.	Current rating A	A	B	C	D	E	F	G	J +0.03 (0.76)	K	L	M	Used with fuse style 1/
-01	FC40AN	100	0.88 (22.4)	2.00 (50.8)	0.75 (19.1)	0.31 (7.9)	1.78 (45.2)	0.84 (21.3)	0.062 (1.57)	0.03 (0.8)	0.122 (3.10)	0.44 (11.2)	0.44 (11.2)	F19, F63
-02	FC40BN	200	1.25 (31.8)	2.62 (66.5)	1.00 (25.4)	.38 (9.7)	2.53 (64.3)	1.28 (32.5)	.062 (1.57)	.06 (1.6)	.184 (4.67)	.62 (15.7)	.56 (14.2)	F20, F64
-03	FC40CN	400	1.75 (44.5)	3.50 (88.9)	1.25 (31.8)	.50 (12.7)	3.38 (85.9)	1.78 (45.2)	.093 (2.36)	.09 (2.3)	.247 (6.27)	.88 (22.4)	.69 (17.5)	F21, F65
-04	FC40DN	600	2.12 (53.8)	4.12 (104.6)	1.50 (38.1)	.62 (15.7)	3.75 (95.3)	2.16 (54.9)	.125 (3.2)	.09 (2.3)	.247 (6.27)	1.06 (26.9)	.75 (19.1)	F22, F66

1/ See MIL-F-15160.

REQUIREMENTS:

1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
3. The horizontal position of fuse stop punching on the clip jaw is optional.
4. Clip jaws and contact blocks shall be copper; screws shall be copper or brass.
5. Unless otherwise specified, the panel mounting screws shall be for 1/2 inch (12.7) panel thickness.
6. The wire lug terminal (solder type) is shown to indicate the preferred shape, and is not a part of the fuse clip.
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
8. For terminal and mounting hardware assembly information, see table I.

FIGURE 1. Style FC40 electrical fuse clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

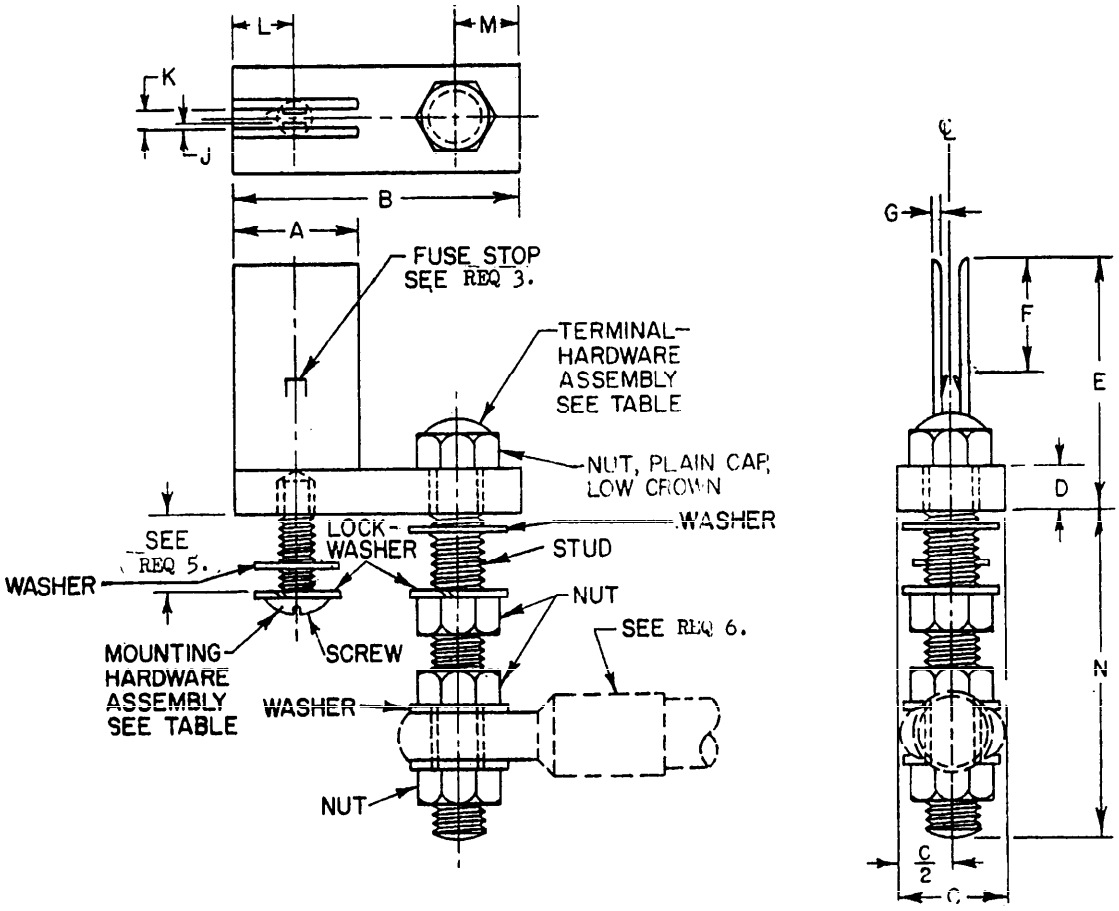


FIGURE 2. Style FC41 electrical fuse clip. - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:19Z
Check the source to verify that this is the current version before use.

Military part no. M21346/2	Type designation no.	Current rating A	A	B	C	D	E	F	G	J +0.03 (0.76)	K	L	M	N	Used with fuse style 1/
-05	FC41AN	100	0.88 (22.4)	2.00 (50.8)	0.75 (19.1)	0.31 (7.9)	1.78 (45.2)	0.84 (21.3)	0.062 (1.57)	0.03 (0.8)	0.122 (3.10)	0.44 (11.2)	0.44 (11.2)	2.25 (57.2)	F19, F63
-06	FC41BN	200	1.25 (31.8)	2.62 (66.5)	1.00 (25.4)	.38 (9.7)	2.53 (64.3)	1.28 (32.5)	.062 (1.57)	.06 (1.6)	.184 (4.67)	.62 (15.7)	.56 (14.2)	3.00 (76.2)	F20, F64
-07	FC41CN	400	1.75 (44.5)	3.50 (88.9)	1.25 (31.8)	.50 (12.7)	3.38 (85.9)	1.78 (45.2)	.093 (2.36)	.09 (2.3)	.247 (6.27)	.88 (22.4)	.69 (17.5)	3.50 (88.9)	F21, F65
-08	FC41DN	600	2.12 (53.8)	4.12 (104.6)	1.50 (38.1)	.62 (15.7)	3.75 (95.3)	2.16 (54.9)	.125 (3.18)	.09 (2.3)	.247 (6.27)	1.06 (26.9)	.75 (19.1)	4.50 (114.3)	F22, F66

1/ See MIL-F-15160.

REQUIREMENTS:

1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
3. The horizontal position of fuse stop punching on the clip jaw is optional.
4. Clip jaws, contact blocks and studs shall be copper; screws shall be copper or brass.
5. Unless otherwise specified, the panel mounting screws shall be for 1 inch (25.4) panel thickness.
6. The wire lug terminal (solder type) is shown to indicate the preferred shape and is not a part of the fuse clip.
7. Metric equivalents are given for general information and are based upon 1 inch = 25.4 mm.
8. For terminal and mounting hardware information, see table I.

FIGURE 2. Style FC41 electrical fuse clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

TABLE I. Hardware assembly.

Military part number	Type designation	Terminal-hardware assembly			Mounting-hardware assembly		
		Item	Qty	Description	Item	Qty	Description
M21346/2-01	FC40AN	Screw Washer Nut Lockwasher	1 2 1 1	MS35214[1/] MS15795-914 MS35691-20 MS35338-8	Screw Washer Lockwasher	1 1 1	1/4-20 UNC-2A PAN HD[1/] MS15795-910 MS35338-6
M21346/2-02	FC40BN	Screw Washer Nut Lockwasher	1 2 1 1	MS35214[1/] MS15795-912 MS35691-12 MS35338	Screw Washer Lockwasher	1 1 1	MS35214[1/] MS15795 MS35338
M21346/2-03	FC40CN	Screw Washer Nut Lockwasher	1 2 1 1	MS35214[1/] MS15795-912 MS35691-12 MS35338	Screw Washer Lockwasher	1 1 1	MS35214[1/] MS15795 MS35338
M21346/2-04	FC40DN	Screw Washer Nut Lockwasher	1 2 1 1	1/2-13 NC-2A PAN HD[1/] MS15795-918 MS35691-36 MS35338-10	Screw Washer Lockwasher	1 1 1	1/2-13 NC-2A PAN HD[1/] MS15795 MS35338-10
M21346/2-05	FC41AN	Stud Washer Nut Lockwasher Nut	1 3 3 1 1	3/8-16 UNC-2A MS15795-914 MS35691-20 MS35338-8 MS24679-7	Screw Washer Lockwasher	1 1 1	1/4-20 UNC-2A PAN HD[1/] MS15795-910 MS35338-6
M21346/2-06	FC41BN	Stud Washer Nut Lockwasher Nut	1 3 3 1 1	1/2-13 UNC-2A MS15795-918 MS35691-36 MS35338-10 MS24679-9	Screw Washer Lockwasher	1 1 1	MS35214[1/] MS15795-912 MS35338-7
M21346/2-07	FC41CN	Stud Washer Nut Lockwasher Nut	1 3 3 1 1	3/4-16 UNF-2A MS15795-922 MS35691-64 MS35338-13 MS24679-72	Screw Washer Lockwasher	1 1 1	MS35214[1/] MS15795-912 MS35338-7
M21346/2-08	FC41DN	Stud Washer Nut Lockwasher Nut	1 3 3 1 1	15/16-16 UNF-2A 15/16 15/16 hex MS35338-15 15/16-16 UNF-2B	Screw Washer Lockwasher	1 1 1	1/2-13 UNC-2A PAN HD[1/] MS15795-918 MS35338-10

[1/] Length of screw depends on thickness of panel.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Preparing activity:
Navy - SH

(Project 5920-0319-1)

Review activities:
Army - MI, EA, MU
Navy - EC
Air Force - 17, 80
DSA - ES

User activities:
Army - WC, AT
Navy - MC, AS, CG
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF NAVY

DOD 316

U.S.MAIL

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.