
MILITARY SPECIFICATION SHEET

FUSEHOLDER, BLOCK TYPE; STYLES FH20, FH21, FH22, FH23, FH24, FH25, FH30, FH31, AND FH32

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

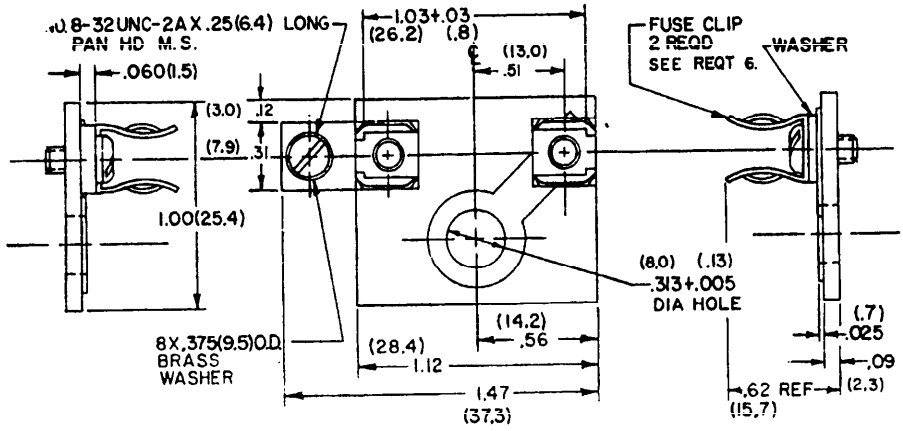

REQUIREMENTS:


1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ± 0.02 (0.5) and ± 0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. Lug and terminal material shall be brass.
6. Fuse clips shall be part number M21346/1-01 (type FC21AN) (MIL-F-21346/1)
7. This fuseholder is for use with fuse style F01 of MIL-F-15160/1 (for 1/4 inch (6.4) diameter by 1-inch (25.4) long fuse).
8. Rating shall be 2 A maximum at 250 V.
9. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
10. Military part No. for style FH20AM is M21346/3-01.

FIGURE 1. Style FH20AM fuseholder (meter mounted).

Ⓒ Denotes changes

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:19Z
Check the source to verify that this is the current version before use.

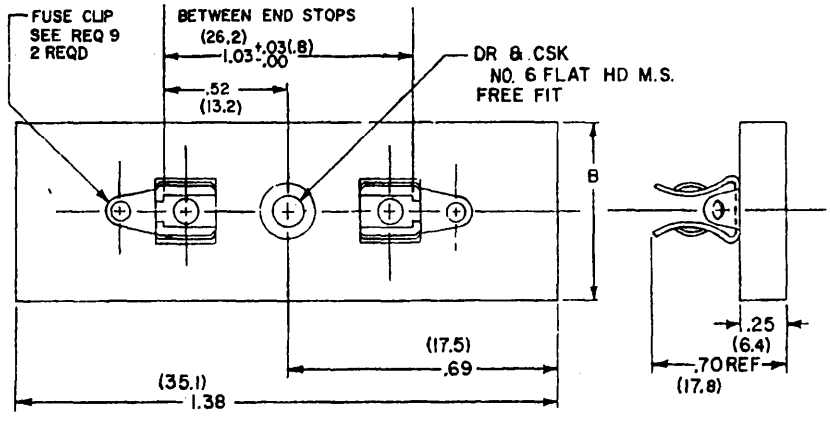


Military Part No. M21346/3	Type designation No.	No. poles	B	Military Part No. M21346/3	Type designation No.	No. poles	B
-02	FH21AM	1	0.50 (12.7)	-08	FH21JM	7	4.25 (108.0)
-03	FH21BM	2	1.12 (28.4)	-09	FH21KM	8	4.88 (124.0)
-04	FH21CM	3	1.75 (44.4)	-10	FH21LM	9	5.50 (139.7)
-05	FH21EM	4	2.38 (60.4)	-11	FH21MM	10	6.12 (155.4)
-06	FH21GM	5	3.00 (76.2)	-12	FH21NM	11	6.75 (171.4)
-07	FH21HM	6	3.62 (91.9)	-13	FH21PM	12	7.38 (187.4)

REQUIREMENTS

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. The following notes apply to width B of the fuseholders (see table).
   (a) The longitudinal centerline of the outer pairs of fuse clips shall be located 0.25 (6.4) from the edge of the fuseholder block.
   (b) The distance between longitudinal centerlines of adjacent pairs of fuse clips shall be 0.62 (15.7).
   (c) A minimum of two mounting holes shall be provided on multiple pole fuseholders. These holes shall be one each centrally located between the fuse clips on the longitudinal centerline of the outer pairs of fuseclips.
6. Electrical rating for this series of fuseholders shall be 2 A at 250 V.
7. This fuseholder is for use with fuse style F01 of MIL-F-15160/1 (for 1/4 inch (6.4) diameter by 1-inch (25.4) long fuse).
8. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
9. Fuse clips shall be part number M21346/1-09 (type FC22AN) or part number M21346/1-14 (type FC23AN) of MIL-F-21346/1.

FIGURE 2. Style FH21 fuseholder (solder lug terminal type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

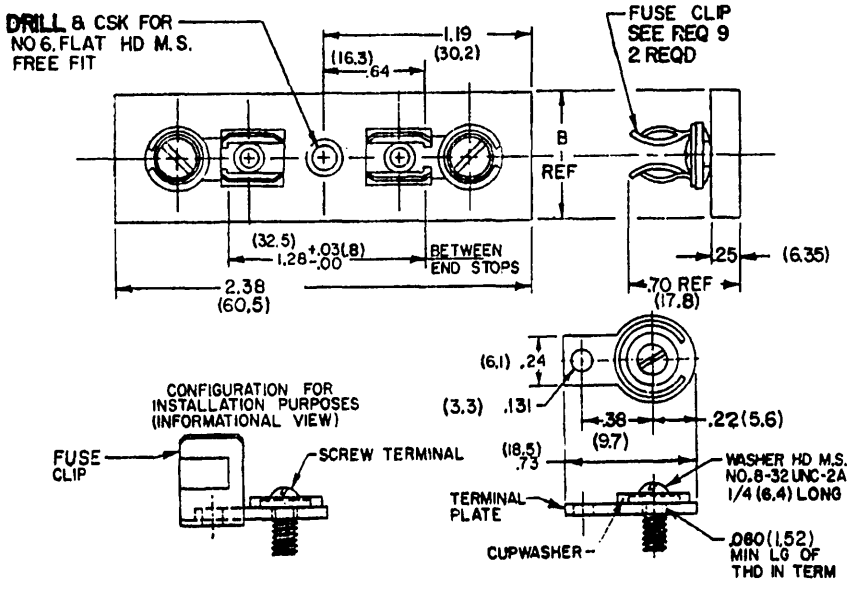


Military Part No. M21346/3	Type designation No.	No. poles	B	Military Part No. M21346/3	Type designation No.	No. poles	B
-14	FH22AM	1	0.78 (19.8)	-20	FH22JM	7	6.22 (158.0)
-15	FH22BM	2	1.69 (42.9)	-21	FH22KM	8	7.12 (180.8)
-16	FH22CM	3	2.59 (65.8)	-22	FH22LM	9	8.03 (204.0)
-17	FH22EM	4	3.50 (88.9)	-23	FH22MM	10	8.94 (227.1)
-18	FH22GM	5	4.41 (112.0)	-24	FH22NM	11	9.84 (249.9)
-19	FH22HM	6	5.31 (134.9)	-25	FH22PM	12	10.75 (273.1)

REQUIREMENTS

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. The following notes apply to width B of the fuseholders (see table).
   (a) The longitudinal centerline of single pole and the outer pairs of the fuse clips of multiple pole fuseholders shall be located 0.39 (9.9) from the edge of the fuseholder block.
   (b) The distance between longitudinal centerlines of adjacent pairs of fuse clips shall be 0.91 (23.1).
   (c) A minimum of two mounting holes shall be provided on multiple pole fuseholders. These holes shall be one each centrally located between the fuse clips on the longitudinal centerline of the outer pairs of fuse clips.
6. Electrical rating for this series of fuseholders shall be 30 A.
7. This fuseholder is for use with styles F02 and F03 of MIL-F-15160/2 and /3 (for 1/4-inch (6.4) diameter by 1-1/4-inch (31.7) long fuse).
8. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
9. Fuse clip shall be part number M21346/1-01 (type FC21/AN) of MIL-F-21346/1.

FIGURE 3. Style FH22 fuseholder (screw terminals).

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:19Z
Check the source to verify that this is the current version before use.

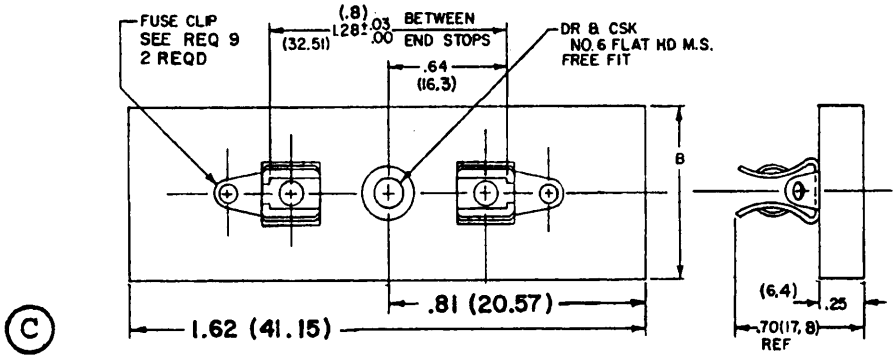


Military Part No. M21346/3	Type designation No.	No. poles	B	Military Part No. M21346/3	Type designation No.	No. poles	B
-26	FH23AM	1	0.78 (19.8)	-32	FH23JM	7	6.22 (158.0)
-27	FH23BM	2	1.69 (42.9)	-33	FH23KM	8	7.12 (180.8)
-28	FH23CM	3	2.59 (65.8)	-34	FH23LM	9	8.03 (204.0)
-29	FH23EM	4	3.50 (88.9)	-35	FH23MM	10	8.94 (227.1)
-30	FH23GM	5	4.41 (112.0)	-36	FH23NM	11	9.84 (249.94)
-31	FH23HM	6	5.31 (134.9)	-37	FH23PM	12	10.75 (273.1)

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. The following notes apply to width B of fuseholder (see table).
   (a) The longitudinal centerline of single pole and outer pairs fuse clips of multiple pole fuseholders shall be located 0.39 (9.9) from the edge of the fuseholder block.
   (b) The distance between longitudinal centerlines of adjacent pairs of ruse clips shall be 0.91 (23.1).
   (c) A minimum of two mounting holes shall be provided on multiple pole fuseholders. These holes shall be one each centrally located between the fuse clips on the longitudinal centerline of the outer pairs of fuse clips.
6. Electrical rating for this series of fuseholders shall be 20 A at 250 V.
7. This fuseholder is for use with fuse styles F02 and F03 of MIL-F-15160/2 and /3 for 1/4-inch (6.4) diameter by 1-1/4-inch (31.7) long fuse).
8. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
9. Fuse clips shall be part number M21346/1-09 (type FC22AN) or part number M21346/1-14 (type FC23AN) of MIL-F-21346/1.

FIGURE 4. Style FH23 fuseholder (solder-lug terminal type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

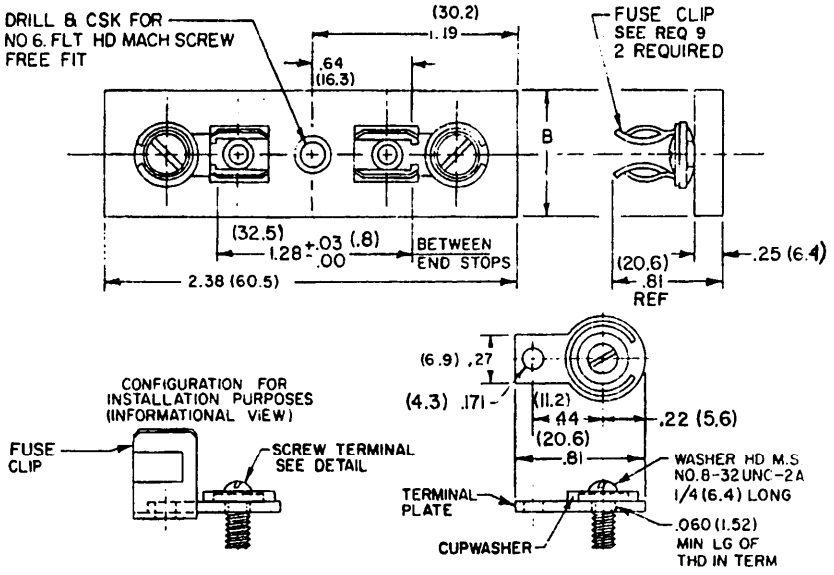


Military Part No. M21346/3	Type designation No.	No. poles	B	Military Part No. M21346/3	Type designation No.	No. poles	B
-38	FH24AM	1	0.78 (19.8)	-44	FH24JM	7	6.22 (158.0)
-39	FH24BM	2	1.69 (42.9)	-45	FH24KM	8	7.12 (180.8)
-40	FH24CM	3	2.59 (65.8)	-46	FH24LM	9	8.03 (204.0)
-41	FH24EM	4	3.50 (88.9)	-47	FH24MM	10	8.94 (227.1)
-42	FH24GM	5	4.41 (112.0)	-48	FH24NM	11	9.84 (249.9)
-43	FH24HM	6	5.31 (134.9)	-49	FH24PM)	12	10.75 (273.1)

REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ± 0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. The following notes apply to width B of the fuseholders (see table).
   (a) The longitudinal centerline of single pole and outer pairs of fuse clips on multiple pole fuseholders shall be located 0.39 (9.9) from the edge of the fuseholder block.
   (b) The distance between longitudinal centerlines of adjacent pairs of fuse clips shall be 0.91 (23.1).
   (c) A minimum of two mounting holes shall be provided on multiple pole fuseholders. These holes shall be one each centrally located between the fuse clips on the longitudinal centerline of the outer pairs of fuse clips.
6. Electrical rating for this series of fuseholders shall be 30 A at 250 V.
7. This fuseholder is for use with fuse styles F05 and F06 of MIL-F-15160/5 and /6 (for 9/32-inch (7.1) diameter by 1-1/4-inch (31.7) long fuse).
8. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
9. Fuse clip shall be part number M21346/1-02 (type FC21BN) of MIL-F-21346/1.

FIGURE 5. Style FH24 fuseholder (screw terminals).

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:19Z
Check the source to verify that this is the current version before use.

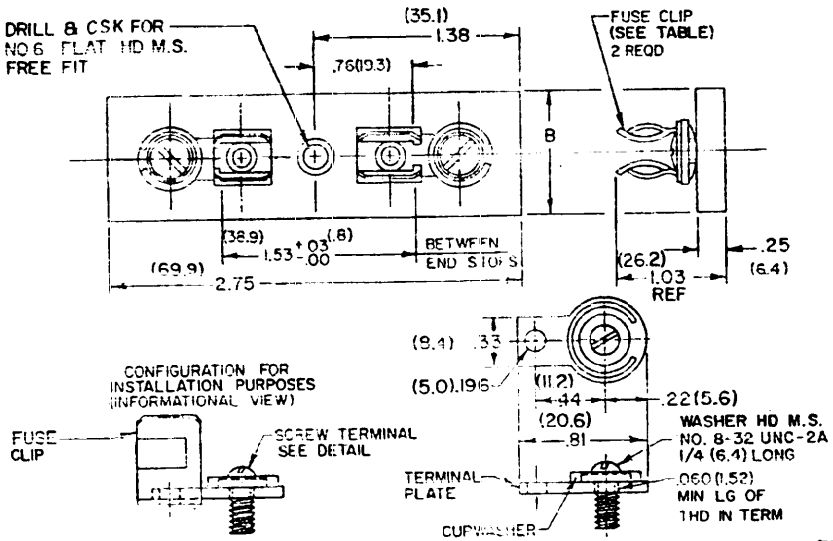

Military Part No. M21346/3	Type designation No.	No. Poles	B	Fuse clip 1/	Military Part No. M21346/3	Type designation No.	No. Poles	B	Fuse Clip 2/
-50	FH25AM	1	0.84 (21.3)	M21346/1-03	-62	FH25AMF	1	0.84 (21.3)	M21346/1-04
-51	FH25BM	2	1.81 (46.0)		-63	FH25BMF	2	1.81 (46.0)	
-52	FH25CM	3	2.78 (70.6)		-64	FH25CMF	3	2.78 (70.6)	
-53	FH25EM	4	3.75 (95.3)		-65	FH25EMF	4	3.75 (95.3)	
-54	FH25GM	5	4.72 (119.9)		-66	FH25GMF	5	4.72 (119.9)	
-55	FH25HM	6	5.69 (144.5)		-67	FH25HMF	6	5.69 (144.5)	
-56	FH25JM	7	6.66 (169.2)		-68	FH25JMF	7	6.66 (169.2)	
-57	FH25KM	8	7.62 (193.5)		-69	FH25KMF	8	7.62 (193.5)	
-58	FH25LM	9	8.59 (218.2)		-70	FH25LMF	9	8.59 (218.2)	
-59	FH25MM	10	9.56 (242.8)		-71	FH25MMF	10	9.56 (242.8)	
-60	FH25NM	11	10.53 (267.5)		-72	FH25NMF	11	10.53 (267.5)	
-61	FH25PM	12	11.50 (292.1)		-73	FH25PMF	12	11.50 (292.1)	

1/ Type FC21CN of MIL-F-21346/1.
2/ Type FC21CF of MIL-F-21346/1.

See rements on next page.

FIGURE 6. Style FH25 fuseholder (screw terminals). - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-01-19T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. The following notes apply to width B of the fuseholders (see table).
   (a) The longitudinal centerline of single pole and outer pairs of fuse clips on multiple pole fuseholders shall be located 0.42 (10.7) from the edge of the fuseholder block.
   (b) The distance between longitudinal centerlines of adjacent pairs of fuseholders shall be 0.97 (24.6).
   (c) A minimum of two mounting holes shall be provided on multiple pole fuseholders. These holes shall be one each centrally located between the fuse clips on the longitudinal centerline of the outer pairs of fuse clips.
6. Electrical rating for this series of fuseholders shall be 30 A at 250 V.
7. This fuseholder is for use with F07, F09, and F60 fuses of MIL-F-15160/7, /9, /60 (for 13/32-inch (10.3) diameter by 1-1/2-inch (38.1) long fuse).
8. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 6. Style FH25 fuseholder (screw terminals).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

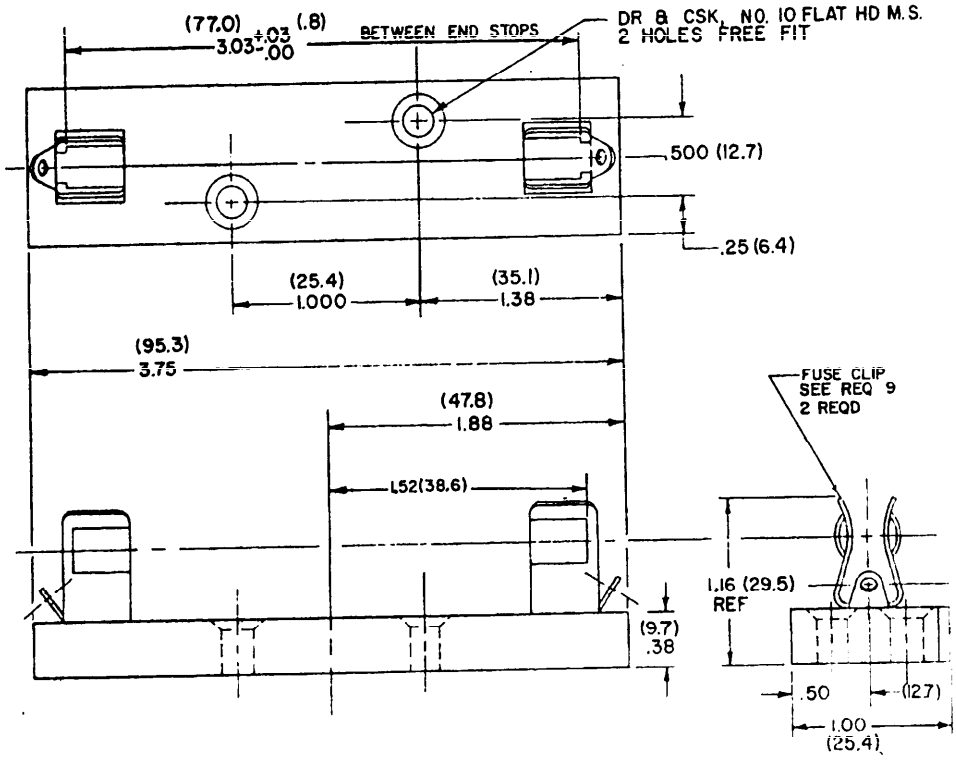


REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. Electrical rating shall be 2 A at 1,000 V.
6. This fuseholder is for use with fuse F27 of MIL-F-15160/27 (for 13/32-inch (10.3) diameter by 3-inch (76.2) long fuse).
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
8. The military part no. for style FH30AM is M21346/3-74.
9. Fuse clips shall be part number M21346/1-11 (type FC22CN) or M21346/1-16 (type FC23/CN of MIL-M-21346/1.

FIGURE 7. Style FH30AM fuseholder (solder lug type terminals).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

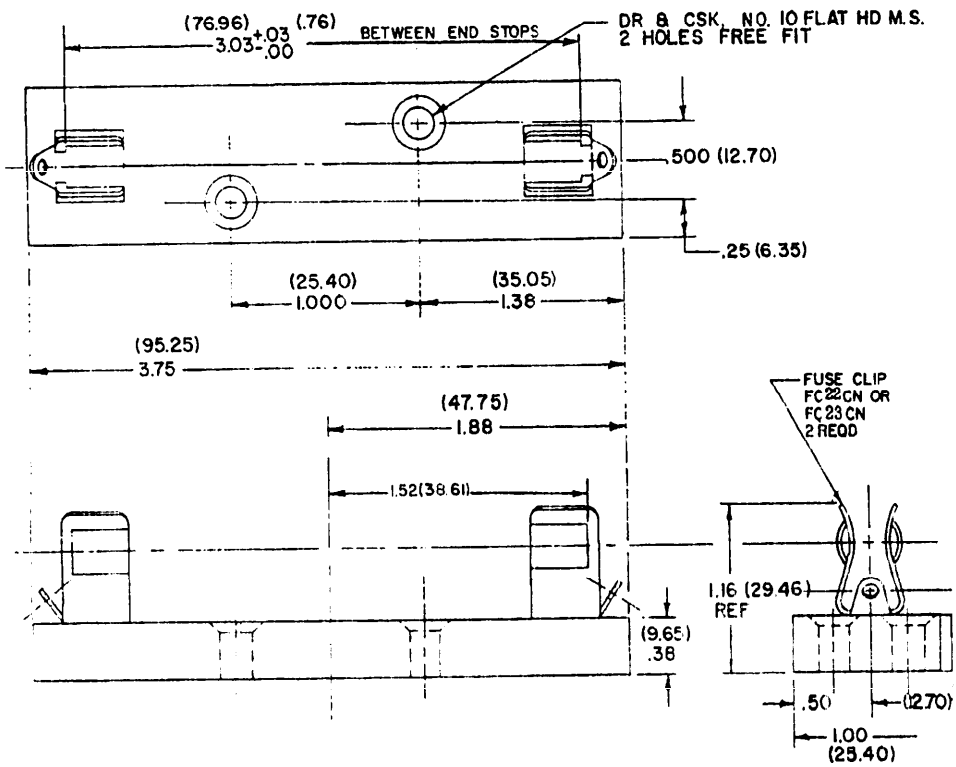


REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. Electrical rating shall be 2 A at 2500 V.
6. This fuseholder is for use with fuse F28 of MIL-F-15160/28 (for 13/32-inch (10.4) diameter by 4-1/2-inch (114.3) long fuse).
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
8. The military part no. for style FH31AM is M21346/3-75.
9. Fuse clips shall be part number M21346/1-11 (type FC22CN) or M21346/1-16 (type FC23CN) of MIL-M-21346/1.

FIGURE 8. Style FH31AM fuseholder (solder lug type type terminals).

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:19Z
Check the source to verify that this is the current version before use.

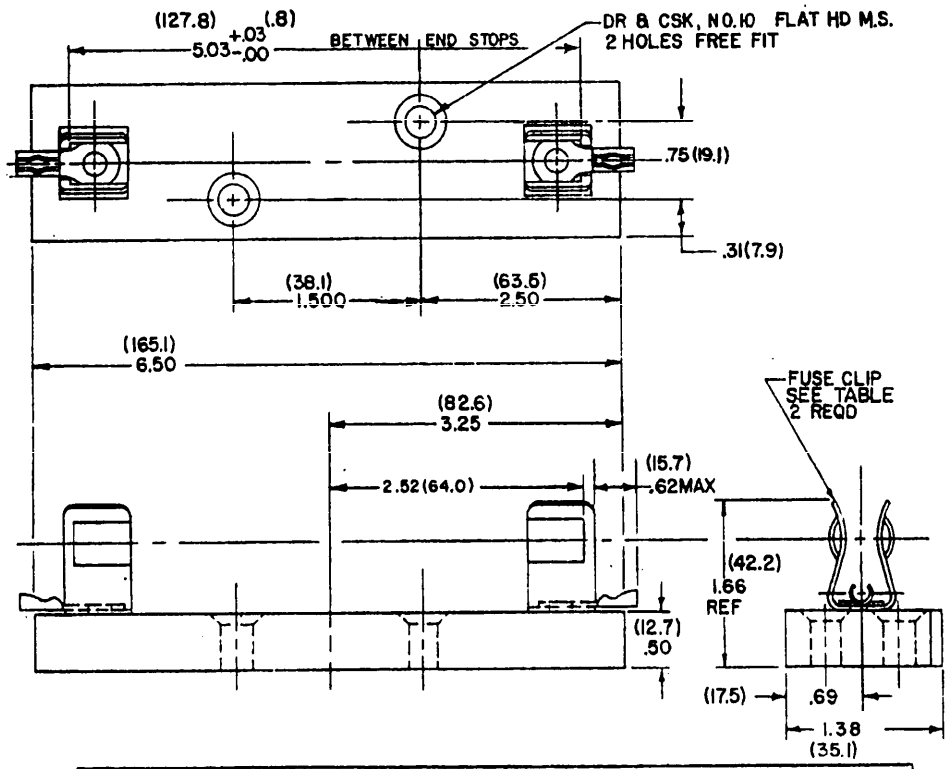

Military Part No. M21346/3	Type designation No.	Fuse clip 1/
-76	FH32AM	M21346/1-07 (type FC21EN)
-77	FH32AMF	M21346/1-08 (type FC21EF)

1/ See MIL-F-21346/1.

REQUIREMENTS:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified, tolerances on two place decimals shall be ±0.02 (0.5) and ±0.005 (0.13) on three place decimals.
4. Base material shall be plastic.
5. Electric rating shall be 3 A at 5,000 V.
6. This fuseholder is for use with fuse F29 of MIL-F-15160/29 (for 13/16-inch (20.6) diameter by 5-inch (127.0) long fuse).
7. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 9. Style FH32 fuseholder (solder-wire-lug terminal type).

Custodians:
Army - ER
Navy - SH
Air Force - 85
Review activities:
Army - MI, EA, AR
Navy - EC
Air Force - 99, 17
DLA - ES
User activities:
Army - AR, AT
Navy - MC, AS, CG
Air Force - 19

Preparing activity:
Navy - SH
(Project 5920-0375-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-F-21346/3C

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 3112)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.