
MIL-F-21346/5A
16 July 1968
SUPERSEDING
MIL-F-21346/5
24 April 1958

MILITARY SPECIFICATION SHEET

FUSEHOLDER, BLOCK TYPE
STYLE FH33

The complete requirements for procuring the fuseholder described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

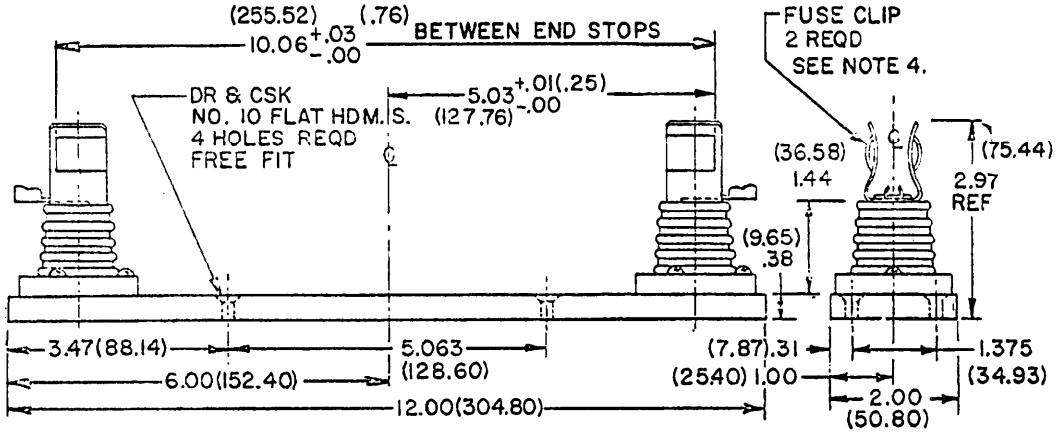

Part No.	Fuse clip 1/
FH33AM	FC21EN
FH33AMF	FC21EF

1/ See MIL-F-21346/1

NOTES:
1. Dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base shall be plastic; stand-off insulators shall be ceramic and the wire lug terminals (solder type) shall be copper.
4. This fuseholder is for use with style F30 of MIL-F-15160/30 (for 13/16 (20.62)-inch-diameter by 10 (254.00) inch-long fuse).
5. Electrical rating shall be 3 amperes at 10,000 volts.
6. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style FH33 fuseholder (solder type).

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, ME, MU
Navy - SH, EC
Air Force - 85, 17
DSA - ES

User activities:
Army - WC, AT, AV
Navy - MC, AS, CG
Air Force - 19

Preparing activity:
Navy - SH

(Project 5920-0178)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.