
MIL-F-21346/9A
16 July 1968
SUPERSEDING
MIL-F-21346/9
24 April 1958

MILITARY SPECIFICATION SHEET

FUSEHOLDER, BLOCK TYPE
STYLES FH65 TO FH68 INCLUSIVE, AND FH69

The complete requirements for procuring the fuseholder described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

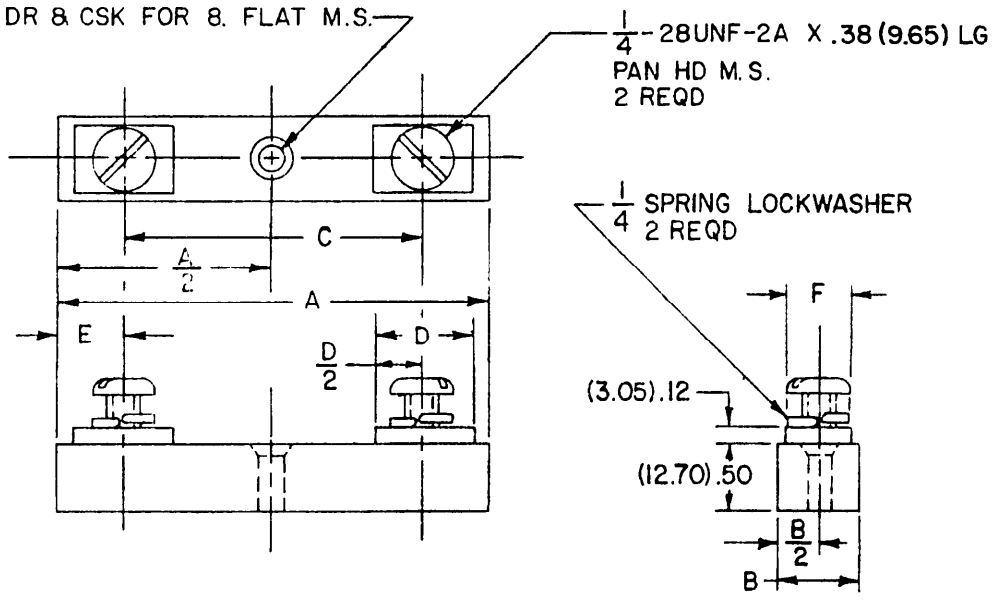

Part No.	Dimensions						For use with fuse style 1/	Current rating (amps)	Voltage rating (volts)
	A	B	C ±.03 (.76)	D	E	F			
FH65AM	3.25 (82.55)	.62 (15.75)	2.31 (58.67)	1.00 (25.40)	.50 (12.70)	.50 (12.70)	F36	15	125
FH66AM	4.00 (101.60)	.75 (19.05)	2.56 (65.02)	1.00 (25.40)	.75 (19.05)	.56 (14.22)	F37	30	
FH67AM	4.50 (114.30)	.88 (22.35)	3.06 (77.72)	1.00 (25.40)	.75 (19.05)	.69 (17.53)	F38	60	
FH68AM	5.00 (127.00)	.88 (22.35)	3.56 (90.42)	1.00 (25.40)	.75 (19.05)	.69 (17.53)	F39	120	


1/ See MIL-F-15160.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base shall be plastic, terminal plates shall be copper and screws shall be brass.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Endurance test is not required.

FIGURE 1. Styles FH65 to FH68, inclusive, fuseholders, (screw clamps).

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

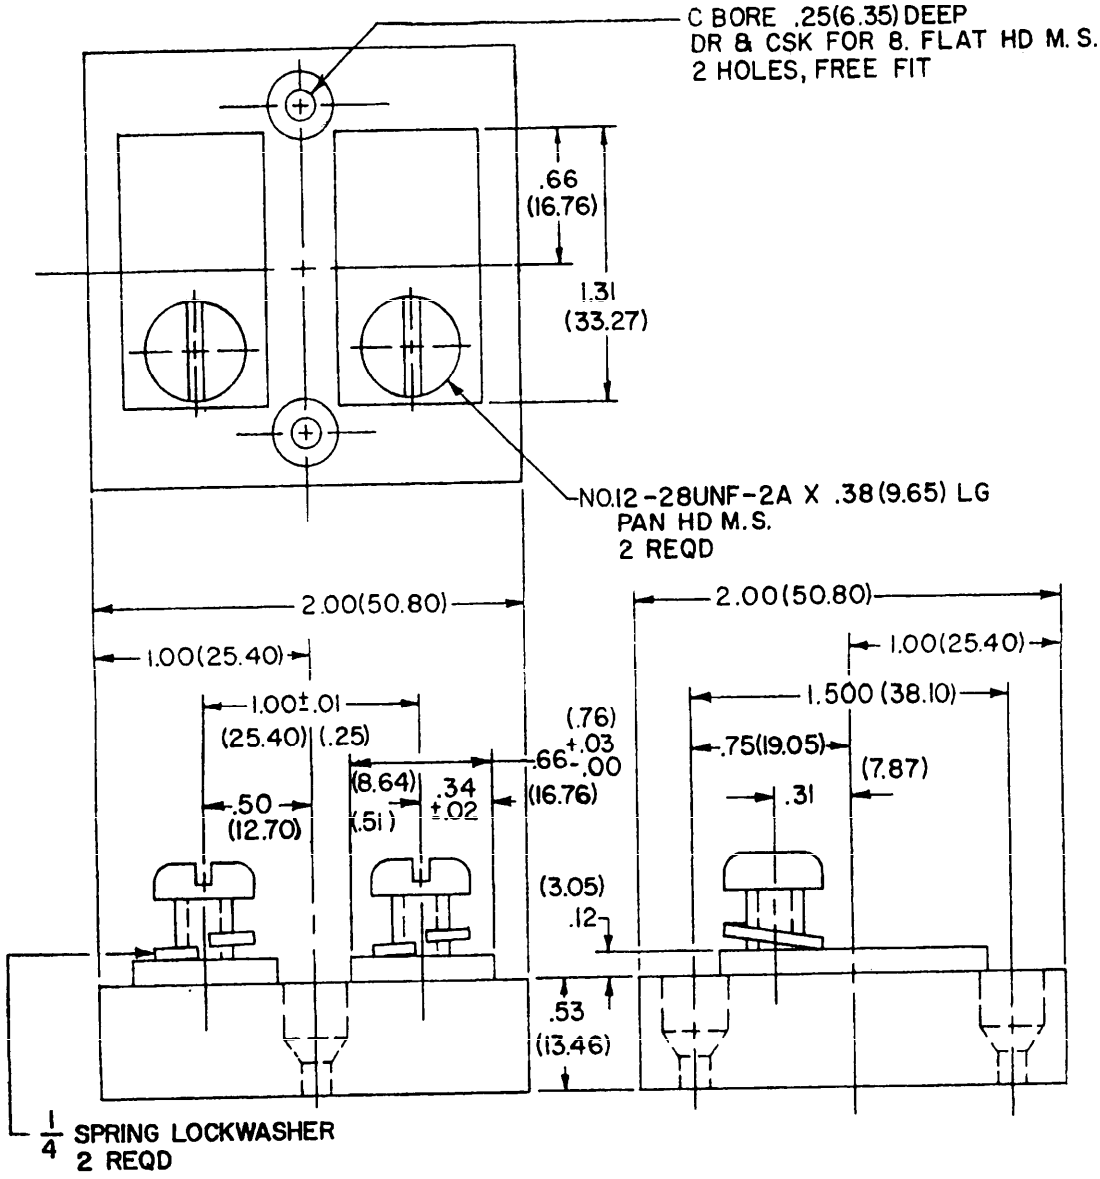

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base shall be plastic, terminal plates shall be copper and screws shall be brass.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch =25.4 mm.
5. This fuseholder for use with fuse style F40 of MIL-F-15160.
6. Ratings:
   Current .. ... 150 amperes
   Voltage ..... 125 volts

FIGURE 2. Style FH69AM fuseholder (screw clamp).

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:20Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, ME, MU
Navy - SH, EC
Air Force - 85, 17
DSA - ES

User activities:
Army - WC, AT, AV
Navy - MC, AS, CG
Air Force - 19

Preparing activity:
Navy - SH

(Project 5920-0263)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.