MIL-H-21367E(SH)
18 October 1985
SUPERSEDING
MIL-C-21367D(EC)
16 July 1969
(See 6.6)

MILITARY SPECIFICATION


HULL FITTINGS: CONNECTORS, ADAPTER, END SEALS, AND STUFFING TUBES FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLES

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers submersible connectors (receptacles and plugs), stuffing tubes, adapter, and end seals, hereinafter referred to as hull fittings, for use in conjunction with flexible, solid-dielectric, radio-frequency cable and suitable for use in submarine hulls.

1.2 Military part number. The Military part number shall consist of the letter "M", the basic number of the specification sheet, and an assigned dash number (see 3.1) as shown in the following example:

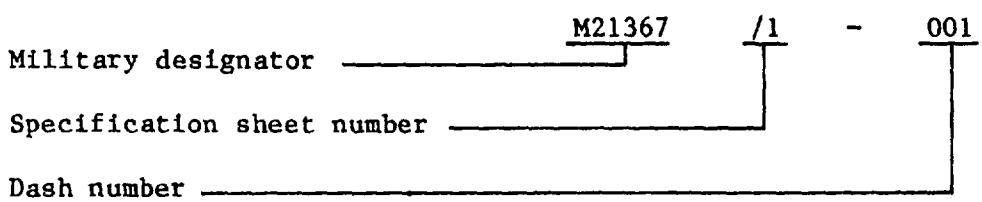

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 55Z3, Department of the Navy, Washington, DC 20362-5101 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5935
FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

L-P-390	- Plastic, Molding and Extrusion Material, Polyethylene and Copolymers (Low, Medium, and High Density).
QQ-B-654	- Brazing Alloys, Silver.
QQ-C-530	- Copper-Beryllium Alloy Bar, Rod, and Wire (Copper Alloy Numbers 172 and 173).
QQ-C-533	- Copper-Beryllium Alloy Strip (Copper Alloy Numbers 170 and 172).
QQ-N-281	- Nickel-Copper Alloy Bar, Rod, Plate, Sheet, Strip, Wire, Forgings, and Structural and Special Shaped Sections.
QQ-N-286	- Nickel-Copper-Aluminum Alloy, Wrought.
QQ-P-35	- Passivation Treatments for Corrosion-Resisting Steel.
QQ-S-365	- Silver Plating, Electrodeposited: General Requirements for.

MILITARY

MIL-S-901	- Shock Tests, H.I. (High Impact); Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-P-4861	- Packing, Preformed, Rubber, Packaging of.
MIL-S-8660	- Silicone Compound, NATO Code Number S-736.
MIL-L-8937	- Lubricant, Solid Film, Heat Cured, Corrosion Inhibiting, NATO Code Number S-1738.
MIL-E-17555	- Electronic and Electrical Equipment Accessories, and Provisioned Items (Repair Parts): Packaging of.
MIL-C-24231	- Connectors, Plugs, Receptacles, Adapters, Hull Inserts, and Hull Insert Plugs, Pressure-Proof, General Specification for.
MIL-C-24231/25	- Connector, Hull Inserts.

(See supplement 1 for a list of associated specifications.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services.
FED-STD-H28/2 - Screw-Thread Standards for Federal Services Section 2 Unified Screw Threads - UN and UNR Thread Forms.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-167-1 - Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited).
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-454 - Standard General Requirements for Electronic Equipment.

2.1.2 Other Government publications. The following other Government publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

NAVSHIPS 0962-022-2010 - Molding and Inspection Procedure for Fabricating Connector Plugs for Submarine Outboard Cables.
NAVSEA 0948-045-7010 - Material Identification and Control (MIC) for Piping Systems, Volume I.

(Copies of specifications, standards, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

B46. 1 - Surface Texture, Surface Roughness, Waviness and Lay. (DoD adopted)

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

E 10 - Brinell Hardness of Metallic Materials, Standard Test Method for. (DoD adopted)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheets. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.5 and 6.3).

3.3 Materials. Materials shall conform to applicable specifications and shall be as specified herein or on the applicable specification sheet. Materials which are not specifically specified herein or on the applicable specification sheet shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended. Sufficient material identifications and controls shall be exercised by the contractor to assure that the final product conforms to this specification.

3.3.1 Material control objective quality evidence. Objective quality evidence of chemical analysis and physical properties of material per heat from the mill, traceable from the serial number on the final product, shall be prepared and maintained and supplied when specified (see 6.2.2) in support of specification compliant material. Material identity, traceable to this objective evidence, shall be maintained throughout the manufacturing process.

3.3.1.1 Additional material certification shall be required from the manufacturer of the hull fitting bodies, body nuts, body washers, and blanking plugs for stuffing tubes to assure that the required age hardening or annealing, or both, required in the manufacturing process has been done correctly (see 4.3). For each annealing, or age hardening step, or both, the contractor, at his option, shall supply one of the following additional material certification documentations, traceable by the serial number to every hull fitting body, body nut, body washer, and blanking plug:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

(a) For each heat of material used in the production of the hull fitting bodies, body nuts, body washers, and blanking plugs, a test bar shall be subjected to the same annealing and age hardening as the production items. This test bar shall then be tested to ascertain that the physical properties meet the requirements specified in 3.3.2.

(b) When nickel-copper-aluminum alloy bar stock is obtained in the mill annealed condition (annealed by the mill) and manufacturing processes are restricted to machining operations, age hardening and welding, the mill test certification on an age hardened test bar, records of age-hardening, and certified calibration records of the furnace temperature measuring devices shall be maintained. This heat treatment record shall consist of a time versus temperature plot of all age hardening heat treatments that the product undergoes, and shall identify, by serial numbers, the products to which it applies. The parts shall be age hardened in accordance with QQ-N-286.

3.3.1.2 As an example of the material control objective quality evidence required for a hull fitting (body, body nut, body washer, and blanking plug), the following is provided:

(a) When the contractor chooses option (a) of 3.3.1.1, the following is required with the final product:

(1) Chemical analysis of the nickel-copper-aluminum alloy bar stock used to manufacture each body, body nut, body washer, and blanking plug to assure compliance with the nickel-copper-aluminum requirements specified in 3.3.2. The chemical analysis furnished by the mill will satisfy this requirement when supplemented by the required traceability marking identifying the finished products to the bar stock on which the chemical analysis was conducted.

(2) Physical analysis of the nickel-copper-aluminum alloy bar stock used to manufacture each body, body nut, body washer, and blanking plug to assure compliance with the physical properties of the nickel-copper-aluminum specified in 3.3.2. This will require a test bar from each different heat of material used in the manufacture of the final product. The test bar shall undergo the same heat treatments the bodies, body nuts, body washers, and blanking plugs undergo in manufacture. The bar shall then be tested, and test reports shall be provided with the finished products to assure compliance of the pieces to the physical properties specified in 3.3.2. Traceability shall be required for the test bars and all final products to the original heat material.

(b) When the contractor chooses option (b) of 3.3.1.1, the following shall be required with the final product:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

(1) Chemical analysis of the nickel-copper-aluminum alloy bar stock used to manufacture the body, body nut, body washer, and blanking plug to assure compliance with the nickel-copper-aluminum alloy specified in 3.3.2. The chemical analysis furnished by the mill will satisfy this requirement when supplemented by the required traceability markings identifying the finished product to the bar stock on which the chemical analysis was conducted.

(2) Physical analysis of the nickel-copper-aluminum alloy bar stock used to manufacture the body, body nut, body washer, and blanking plug to assure compliance with the physical properties of the nickel-copper-aluminum alloy specified in 3.3.2. The physical analysis furnished by the mill will satisfy this requirement when supplemented by the required traceability markings identifying the finished product to the bar stock on which the physical analysis was conducted. (The physical properties listed in 3.3.2 are for the age hardened condition and therefore the mill shall age harden the sample prior to test.)

(3) A chart, plotting the actual time versus temperature of all age hardening to which the bodies, body nuts, body washers, and blanking plugs were subjected during the manufacturing cycle. Each chart shall identify the pieces subjected to the age hardening it represents. The temperature ranges and time intervals will be used to determine if proper age hardening procedures were employed, and as a basis for rejection of material if the proper procedures were not employed.

(4) Certified calibration records of the furnace temperature measuring devices shall be submitted with the above information.

3.3.2 Hull fitting bodies, body nuts, body washers, and blanking plugs.

3.3.2.1 Nickel-copper-aluminum alloy. After machining and welding, the bodies, body nuts, body washers, and blanking plugs manufactured from mill annealed nickel-copper-aluminum alloy in accordance with class A of QQ-N-286, shall be age hardened to obtain a 130,000 pounds force per square inch (lbf/in^2) minimum tensile strength, 85,000 lbf/in^2 minimum yield strength at 0.2 percent offset, and 20 percent minimum elongation.

3.3.2.2 Nickel-copper alloy. Bodies, body nuts, and body washers manufactured from nickel-copper alloy shall be class A, form 1, hot finished in accordance with QQ-N-281 with a minimum yield stength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn, of QQ-N-281, with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset. The chemical and physical analysis furnished by the mill will satisfy certification requirements when supplemented by the required traceability markings identifying the finished receptacle bodies, body nuts, body washers, and blanking plugs to the bar stock on which the chemical and physical analysis was conducted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

3.3.3 Copper-beryllium alloy. Copper-beryllium contacts shall be in accordance with alloy 172 or 173, temper A or H of QQ-C-530. Copper-beryllium springs shall be in accordance with alloy 172, temper A of QQ-C-533. After machining and forming, contacts and springs shall be given a precipitation hardening treatment, temper AT or HT as specified (see 3.1).

3.3.3.1 Rockwell hardness - contacts. Contacts shall meet the Rockwell hardness requirements of QQ-C-530 following precipitation hardening.

3.3.3.2 Tensile strength - springs. Springs shall meet the tensile strength requirements of QQ-C-533 following precipitation hardening.

3.3.4 Brazing alloy. Brazing alloy shall be in accordance with grade IV of QQ-B-654.

3.3.5 Caps and plugs. Pressure-proof, and protective caps and plugs shall be of the material specified (see 3.1). Where no caps or plugs are specified, red plastic end caps in accordance with type I of L-P-390 shall be installed to prevent damage to threads or entrance of water or dust. Caps and plugs shall remain in place until final assembly.

3.3.6 Recovered materials. Unless otherwise specified herein, all material and articles incorporated in the products covered by this specification shall be new and may be fabricated using materials produced from recovered materials to the maximum extent practicable without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification unless otherwise specifically specified.

3.3.7 Prohibited materials. Asbestos, mercury, and cadmium shall not be used in construction of the hull fittings.

3.3.7.1 Mercury in any form shall not be used in manufacturing and test processes (including test equipment such as mercury thermometers) applying to the basic hull fitting but may be used in manufacturing and test processes for materials and parts provided it is used in such a way that contamination of the materials and parts themselves cannot result.

3.4 Design and construction. Hull fittings shall be in accordance with the design, construction, and physical dimensions specified (see 3.1).

3.4.1 Molded parts and assemblies. Molded parts and inserts shall be free of flash, blow holes, or other imperfections. Flash shall be removed and the width of the flash edges made thereby shall not be greater than 1/32 inch. Flash edges shall be buffed smooth.

3.4.2 Castings. Cast components shall be free of cold shuts, blow holes, or any other imperfections that may in any way affect the strength or serviceability of the casting. Fins or burrs on casting surfaces shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

3.4.3 Stress relieving. All metals used in fabrication and assembly shall be treated or heat-treated to prevent deterioration or failure due to stresses or other conditions resulting from working and forming during the fabrication process.

3.4.4 Sharp edges. Unless otherwise specified (see 3.1), all sharp edges and corners shall be given a slight radius.

3.4.5 Undercuts. Unless otherwise dimensioned (see 3.1), all undercuts shall be not more than 0.005-inch greater than the minimum minor diameter or maximum major diameter of the thread.

3.4.6 Surface finishes. Surface finishes shown on the specification sheets shall be in accordance with ANSI B46.1. The following details and exceptions apply:

(a) O-ring sealing surfaces shall be free from all defects, scratches, voids, blow holes, dents, and flaws.
(b) Unless otherwise noted, the average roughness of all machined surfaces shall be 125 microinches.
(c) Flaws shall be included in the roughness height measurement.

3.4.7 Threaded parts. Threads shall be in accordance with the requirements of FED-STD-H28 and FED-STD-H28/2. Unless otherwise specified (see 3.1), threads shall be right-hand, fine-thread series, unified form, class 2A or 2B in accordance with FED-STD-H28/2. When specified (see 3.1), threads shall be coated with lubricant in accordance with MIL-L-8937.

3.4.8 Forming and machining operations. All forming and machining operations shall be completed before any plating or finish is applied.

3.4.9 Plating and finish. Dimensions shown on specification sheets shall apply after all plating or finish is applied.

3.4.9.1 Silver plating. Silver plating shall be in accordance with type III, bright, grade A of QQ-S-365 then rhodium flashed. The minimum thickness shall be 0.0002-inch.

3.4.9.2 Passivation. Passivation treatment shall be in accordance with QQ-P-35.

3.4.10 Soldering. Soldering shall be in accordance with requirement 5 of MIL-STD-454.

3.4.11 Contacts.

3.4.11.1 Socket contacts. Contact surfaces of socket contacts shall be kept free from dirt, grease, or any other contaminants before, during and after molding. Removal of molding will not be allowed as cleaning may damage or remove silver plating.

3.4.11.2 Pin contacts. Necessary precautions shall be taken to ensure that pins are straight and in position to prevent damage when plugs are inserted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

3.4.12 Insulators. Insulators shall be lubricated with a light film of silicone compound in accordance with MIL-S-8660 at the time of assembly.

3.4.13 O-rings. O-rings shall be lubricated with a light film of silicone compound in accordance with MIL-S-8660 at the time of assembly. Assembled O-rings shall be checked and installed in accordance with NAVSHIPS 0962-022-2010. O-rings not assembled shall be furnished as specified in 5.1.

3.4.14 Special tools. Where special tools are required to complete the assembly of a hull fitting, they shall be supplied with the fitting. Special tools are defined as those tools not listed in the Federal Supply Catalog (copies of this catalog may be consulted in the office of the Defense Contract Administration Services Management Area (DCASMA)).

3.4.15 Unassembled (loose) parts. All loose parts, including safety wire when applicable, required for installation or operation shall be enclosed in a cloth or plastic bag and packaged with the partially assembled hull fitting (see 5.1). The assembled fitting shall be hand tight only.

3.5 Performance requirements.

3.5.1 Insulation resistance. When tested as specified in 4.8.1, the insulation resistance of connectors, adapters, and end seals shall be as follows:

(a) Conductor to ground: 1000 megohms or greater.
(b) Shield to ground: 100 megohms or greater.

3.5.2 Dielectric withstanding voltage. When connectors, adapters, and end seals are tested as specified in 4.8.2, there shall be no evidence of disruptive discharge, arcing, flashover, corona, or breakdown.

3.5.3 Brinell hardness, nickel-copper-aluminum alloy. When tested in accordance with ASTM E 10 nickel-copper-aluminum alloy parts shall have a Brinell hardness within the range of 250 to 320 (see 4.8.3).

3.5.4 Gauge tests for center contacts. When specified on the applicable specification sheet, contacts shall meet the gauge test requirements of 4.8.4.

3.5.5 Tensile strength (coupling nuts). Where coupling nuts are required (see 3.1), they shall be capable of being turned with finger pressure and shall not become detached from the connector body when tested as specified in 4.8.5.

3.5.6 Shock. The hull fittings shall be in accordance with the grade A, class I, type A shock requirements for lightweight equipment of MIL-S-901 (see 4.8.6).

3.5.7 Vibration. The hull fittings shall be in accordance with type I vibration requirements of MIL-STD-167-1 (see 4.8.7).

3.5.8 Hydrostatic pressure. There shall be no evidence of leakage when hull fittings are subjected to the hydrostatic pressure test of 4.8.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

3.5.9 Salt spray (corrosion). When hull fittings are tested as specified in 4.8.9, there shall be no evidence of excessive corrosion or pitting. Excessive corrosion is defined as that which interferes with electrical (connectors, adapter, and end seals) or mechanical performance, or in the case of plated metals, corrosion which has migrated through the plating.

3.6 Marking.

3.6.1 Hull fittings. Marking of the hull fittings shall be permanent, legible and applied so as not to induce detrimental stresses or to cause malfunction of the part. Except where specified herein, markings shall be 1/8-inch minimum lettering. When specified (see 3.1), identification plates for stuffing tubes and connectors shall be as shown on figures 1 and 2, respectively. When specified (see 3.1), direct marking shall include the same information shown on figures 1 and 2, as applicable.

3.6.1.1 Stuffing tubes, body nuts and body washers. Stuffing tubes, body nuts and body washers shall be marked in accordance with the standard marking system specified in NAVSEA 0948-045-7010. The body nuts and body washers shall also be marked with the type designation in depressed characters approximately 3/32-inch high.

3.6.1.2 Manufacturers' identification. Manufacturers' identification shall be that of the prime manufacturer responsible for the final product.

3.7 Technical data. The contractor shall prepare technical data in accordance with the data ordering documents included in the contract (see 6.2.2).

3.7.1 Assembly sheet. When specified (see 6.2.2), a detailed cable connector assembly sheet shall be supplied with each hull fitting where assembly to the cable must be accomplished by field activities. This assembly sheet shall be of low sulphur content and shall be wrapped around the connector. The assembly sheet shall also contain all information necessary for proper welding into hulls, as required.

3.8 Workmanship. After final assembly, all fittings shall be clean, free from loose, spattered, or excess solder, metal chips, and other foreign material. All sharp edges and burrs shall be removed from metal parts, except where sharp edges are required for mechanical or electrical reasons. Special attention shall be paid to cleanliness of insulating parts.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the cntractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Inspection system. The inspection system which the contractor is required to maintain shall be in accordance with the data ordering documents (see 6.2.2).

4.1.3 Inspection report and samples. When first article inspection is conducted by the contractor, the contractor shall prepare an inspection report in accordance with the data ordering documents (see 6.2.2). When specified (see 6.2.1), along with the inspection report, the contractor shall submit one unassembled (not required when item is not amenable to further disassembly) and two assembled samples to: Commanding Officer, Naval Ship Systems Engineering Station, Code 061, Philadelphia, PA 19112. Unless otherwise specified (see 6.2.1), these shall not be considered as part of the quantity ordered.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) Material control objective quality evidence (see 4.3).
(b) First article inspection (see 4.5).
(c) Quality conformance inspection (see 4.6).

4.3 Material control objective quality evidence.

4.3.1 Each nickel-copper-aluminum alloy hull fitting body, body washer, body nut, and blanking plug shall be accompanied by material control objective evidence that the material is in accordance with all the requirements of the applicable specification. The following information shall be a part of the objective evidence:

(a) Military part number (for example M21367/7-001).
(b) Contract number.
(c) Contractor's identity.
(d) Serial number.
(e) Material certification and heat treatments with a statement to the effect that objective evidence is on file in support of material identification and heat treatment, traceable from the serial number (see 3.3.1, 3.3.1.1, and 3.3.1.2).
(f) Brinell hardness (three readings) with acceptable range of readings.
(g) Direct reading of O-ring surface diameter with specified standard.
(h) That "32" surface finishes are as shown on the applicable specification sheet and are free of imperfections.
(i) Signature or symbol of contractor's inspector.
(j) Signature or symbol of Defense Contract Administration Services Management Area representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

4.3.1.1 The contractor shall pack one copy of the objective quality evidence with the item (see 5.1) and retain a duplicate copy on file. The cognizant inspection service is authorized to withhold shipment until the required objective quality evidence is in accordance with this specification. Failure to provide acceptable objective quality evidence shall be cause for rejection of the material.

4.3.2 Material control objective quality evidence in support of product quality shall be maintained by the contractor until completion of the contract and then turned over to the designated Government representative.

4.3.2.1 Material control objective quality evidence shall be indexed and organized in numerical order, by specification sheet number, prior to transfer to the designated Government representative.

4.4 Inspection conditions. Unless otherwise specified, inspections shall be performed in accordance with the test conditions specified in the General Requirements of MIL-STD-202.

4.5 First article inspection. First article inspection shall be performed by the contractor, after award of contract and prior to production, at a location specified (see 6.2.1). First article inspection shall be performed on sample units which have been produced with equipment and procedures normally used in production. First article acceptance is valid only on the contract under which it is granted, unless extended by the Government to other contracts (see 6.3).

4.5.1 Sample size. Two hull fittings of each Military part number assembled to the applicable cable (see 3.1), shall be subjected to first article inspection. One unassembled hull fitting of each Military part number shall be provided as specified in 4.1.3.

4.5.2 Inspection routine. The assembled samples shall be subjected to the inspections specified in table I, in the order shown.

TABLE I. First article inspection.

Inspection	Requirement	Test method
Visual and mechanical examination	3.1, 3.3, 3.4, 3.6, 3.7 and 3.8	4.7.1
Rockwell hardness - contacts[1/]	3.3.3.1	QQ-C-530
Tensile strength - springs[1/]	3.3.3.2	QQ-C-533
Gauge test of contacts[1/]	3.5.4	4.8.4
Brinell hardness, nickel-copper-aluminum	3.5.3	4.8.3
Salt spray	3.5.9	4.8.9
Insulation resistance[1/]	3.5.1	4.8.1
Dielectric withstanding voltage[1/]	3.5.2	4.8.2
Tensile strength (coupling nuts)[1/]	3.5.5	4.8.5
Shock	3.5.6	4.8.6

Source: https://assist.dla.mil - Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection. - Continued

Inspection	Requirement	Test method
Vibration	3.5.7	4.8.7
Hydrostatic pressure	3.5.8	4.8.8
Packaging	5.1	4.8.10

1/ Not applicable to stuffing tubes and blanking plugs.

4.6 Quality conformance inspection. Quality conformance inspection shall consist of group A and B tests in accordance with 4.6.1.2 and 4.6.1.3.

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A and B inspection.

4.6.1.1 Inspection lot. An inspection lot shall consist of hull fittings of the same Military part number, produced under essentially the same conditions, and offered for inspection at one time.

4.6.1.2 Group A inspection. Group A inspection shall consist of the inspections shown in table II. Classification of defects shall be as shown in table III.

TABLE II. Group A inspection.

Inspection	Requirement	Test method
Visual and mechanical examination	3.1, 3.3, 3.4, 3.6, 3.7 and 3.8	4.7.1
Rockwell hardness - contacts 1/	3.3.3.1	QQ-C-530
Tensile strength - springs 1/	3.3.3.2	QQ-C-533
Brinell hardness, nickel-copper-aluminum	3.5.3	4.8.3
Hydrostatic pressure	3.5.8	4.8.8

1/ Not applicable to stuffing tubes and blanking plugs.

4.6.1.2.1 Sampling plan. Inspections shall be made on 100 percent of production hull fittings.

4.6.1.2.2 Failures. Failures to pass the hardness or hydrostatic pressure test or one or more discrepancies falling within the major categories of table III shall be cause for rejection of the fitting. Minor discrepancies of table III may be repaired and the sample resubmitted for inspection.

4.6.1.3 Group B inspection. Group B inspection shall consist of the dielectric withstanding voltage test specified in 4.8.2.

4.6.1.3.1 Sampling plan. Connectors, adapters, and end seals shall be selected from each inspection lot in accordance with MIL-STD-105. The inspection level shall be S-4, AQL 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

4.6.1.3.2 Noncompliance. If a sample fails to pass group B inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which are manufactured under essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity, has been taken. After the corrective action has been taken group B inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity). Group A inspection may be reinstituted; however, final acceptance and shipment shall be withheld until the group B inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

TABLE III. Classification of defects.

Categories	Defects
Critical:	None defined.
Major:	
101	Hull fittings not as specified.
102	Material; less than the minimum specified requirement; evidence of use of substitute materials used except when authorized.
103	Nickel-copper alloy and copper-beryllium parts not machined and heat treated as specified.
104	Silver brazing and soldering, not accomplished as specified.
105	Dimensions of fittings not within the specified minimum and maximum tolerances.
106	Plating of parts not as specified.
107	Threaded parts: form and class of fit not as specified; threads missing, stripped, crossed, torn or damaged.
108	Surface finish not as specified, surface roughness height rating in contact with O-rings exceeds the specified maximum.
109	Detailed cable connector assembly sheet not furnished when applicable.
110	Insulator installation, not as specified.
111	O-rings: installation of O-ring not as specified; noninstalled O-rings not protected against loss as specified.
112	Fittings not clean and free of loose, spattered or excess solder metal chips and other foreign material.
113	Sharp edges and burrs not removed except as noted.
114	Insulating parts not clean.
115	Marking of fittings not as specified.
116	Parts missing, damaged or nonconforming.
117	Caps and plugs not as specified; missing.
118	Molded parts not as specified; flash not removed; flash edges greater than 1/32 inch.
119	Castings not as specified; fins and burrs not removed.
120	Contacts not free of dirt, grease or other contaminants; not positioned as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects. - Continued

Categories	Defects
Minor:	
201	Assembly of item to be shipped not hand tight only; unassembled parts not packaged with partially assembled fittings.
202	Special tools not supplied, where applicable.
203	Preservation, packaging, packing, and marking not as specified.

4.7 Examinations.

4.7.1 Visual and mechanical examination. Hull fittings shall be examined to verify that materials, design construction, physical dimensions, marking and workmanship are in accordance with the requirements specified herein and in the specification sheets (see 3.1, 3.3, 3.4, 3.6, 3.7 and 3.8).

4.8 Tests.

4.8.1 Insulation resistance. Insulation resistance tests shall be in accordance with method 302, test condition B of MIL-STD-202. The points of measurement shall be between conductor and ground and, where applicable (see 3.1), shield and ground. Acceptance criteria shall be as specified in 3.5.1.

4.8.2 Dielectric withstanding voltage. Connectors, adapter, and end seals shall be tested in accordance with method 301 of MIL-STD-202 to determine conformance to the requirements of 3.5.2. The following details shall apply:

(a) Preparation for test:

1. First article inspection. The fittings shall be assembled with cable (see 3.1), and in the case of receptacles, plugs, and adapter, mated with applicable standard connectors (see appendix).
2. Quality conformance inspection. The center conductors shall be properly positioned in such a manner as to simulate actual assembly conditions. When possible, a cable shall be assembled to or simulated at the back of the fitting. Proper precautions shall be taken to prevent air-gap voltage breakdowns.

(b) Magnitude of test voltage: 5000 volts for connectors and adapters; 10,000 volts for end seals.
(c) Nature of potential: alternating current (ac).
(d) Points of application of test voltage: between center conductor and outer shell of connectors or adapters, and between center conductor and end cap of the end seals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

4.8.3 Brinell hardness, nickel-copper-aluminum alloy. The Brinell hardness of each nickel-copper-aluminum alloy connector and fitting body, body washer, body nut, and blanking plug shall be tested in accordance with ASTM E 10. Unless otherwise indicated (see 3.1), hardness shall be checked at three locations, avoiding critical surfaces. Tests shall be considered as an indication of final material condition and shall be in accordance with 3.5.3. The contact shall pass the following tests with no lubrication: The pin used in (a) may be tapered at the end to facilitate insertion. The ends of gauge pins used (b) and (c) shall be untapered, but the leading edge may be rounded to a radius of 0.005 inch maximum, or chamfered an equal amount.

(a) Insert a gauge pin 0.1970 ± 0.002 inch diameter to a depth of 1/2-inch then remove.
(b) Insert a gauge pin 0.1820 ± 0.0002 inch diameter to a depth of 1/4-inch and hold with the axis vertical and the contact below. The contact shall fall off.
(c) Insert a gauge pin 0.1850 ± 0.0002 inch diameter to a depth of 1/4-inch and hold with the axis vertical. The contact shall not fall off.
(d) Insert the contact into a gauge hole 0.2300 ± 0.0000 inch in diameter in 1/8-inch thick strip as far as it will go without relative rotation, twisting or prying. Insert a pin 0.1960 ± 0.0002 inch diameter into the contact to a depth of 1/4-inch. The insertion force of the pin into the contact shall be 6 pounds maximum. With the pin in the contact, the contact shall pass through the gauge hole easily.

4.8.4 Gauge tests for center contacts. The center contacts shall be subjected to the applicable gauge test prior to the assembly of the center conductor in the connector. Meeting the requirements specified may be determined visually.

4.8.5 Tensile strength (coupling nut). The coupling nut shall be turned by hand to determine freedom of movement and then a tensile test machine shall be connected and a pull of 100 pounds shall be applied to the nut. The pull shall be applied in the direction away from the connector body and along the longitudinal axis to determine conformance to 3.5.5.

4.8.6 Shock. The shock test for grade A, class I, type A lightweight equipment of MIL-S-901 shall be performed on completely assembled hull fittings to determine conformance to 3.5.6. Any signs of electrical (on connectors, adapter, and end seals) or mechanical damage shall be cause for rejection.

4.8.7 Vibration. The vibration test shall be performed on completely assembled hull fittings in accordance with type I of MIL-STD-167-1 to determine conformance to 3.5.7. Any signs of electrical (on connectors, adapter, and end seals) or mechanical damage shall be cause for rejection.

4.8.8 Hydrostatic pressure. Unless otherwise specified on the applicable specification sheet, the hull fittings shall be subjected to the water gauge pressures specified in table IV to determine conformance with 3.5.8. Pressures shall be applied to that portion of hull fittings intended for outboard use (with cable assembled). Adapters intended for inboard use (in conjunction with through-hull fittings) shall have pressures applied at the threaded end. The following details and exceptions shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

(a) First article inspection: Connectors, adapter, and end seals shall be completely assembled and tested in the unmated condition. Stuffing tubes shall be tested with both cables and, where applicable, blanking plugs installed (see appendix). Bolt-in stuffing tubes shall be installed in hull inserts in accordance with MIL-C-24231 and MIL-C-24231/25 (see appendix).

(b) Quality conformance inspection: The hydrostatic pressure in note 1 only shall be applied. The test shall be applicable to stuffing tubes and to electrical fittings which are completely assembled by the contractor. The stuffing tubes may be tested with either the applicable cable or blanking plug installed.

TABLE IV. Hydrostatic pressure test.

Hull fitting	Pressure applied	All primary seals	All secondary seals
Connector/ adapters	At cable end	Test in accordance with notes 1/ through 6/	Test in accordance with notes 1/ and 3/
Stuffing tubes	At larger end		
End seals	Entirely		

1/ 1000 ± 100 lb/in^2 for 15 minutes.
2/ 2000 ± 200 lb/in^2 for 2 hours.
3/ 250 ± 25 lb/in^2 for 4 hours.
4/ 85 ± 25 lb/in^2 for 24 hours (city water main supply pressure is satisfactory if within this range.)
5/ 2 ± 1 lb/in^2 for 24 hours (2 to 6 feet of water.)
6/ Cycle of 1000 lb/in^2 for 15 minutes and 0 lb/in^2 for 15 minutes, 10 times.

4.8.8.1 For purposes of this test, a primary seal shall be defined as the first seal which is directly subject to water pressure when installed; that is, the ambient water has a direct path to that seal without passing any other seal. A secondary seal shall be defined as one which will be subjected to water pressure only in the event a primary seal fails.

4.8.9 Salt spray (corrosion). Hull fittings shall be tested in accordance with method 101, test condition A of MIL-STD-202 to determine conformance to 3.5.9.

4.9 Inspection of packaging. Sample packages and packs, and the inspection of the preservation-packaging, packing and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

(The packaging requirements specified herein apply only for direct Government acquisitions. For the extent of applicability of the packaging requirements of referenced documents listed in section 2, see 6.4.)

5.1 Preservation-packaging, packing and marking. Hull fittings shall be preserved-packaged level A, C or commercial packed level A, B, C or commercial as specified (see 6.2.1) and marked in accordance with MIL-E-17555. In addition, the following shall apply:

(a) O-rings furnished separately with the hull fitting shall be individually packaged and marked in accordance with MIL-P-4861. Each packaged O-ring shall be placed within the applicable hull fitting package.
(b) Unassembled (loose) parts and including safety wire (when applicable) shall be packaged in a cloth or plastic bag and shall be placed within the applicable hull fitting package.
(c) When required (see 3.7.1), an assembly sheet shall be wrapped around the hull fitting.
(d) One copy of the objective quality evidence (see 4.3.1.1) shall be placed within the applicable hull fitting package.
(e) Each hull fitting prior to unit packaging shall be fitted with a metal or plastic cap on both ends of each assembly as applicable, to protect contacts and insulators from entry of foreign matter and to protect the metal surfaces from mechanical and physical damage.

5.2 Marking. In addition to any special marking required (see 6.2.1), unit, intermediate, and exterior shipping containers shall be marked for shipment as specified in MIL-E-17555.

6. NOTES

6.1 Intended use. The hull fittings covered in this specification are primarily intended for use on Naval submarines to provide watertight integrity. They are designed to be used as hull and antenna fittings for standard RF cables in submarine antenna system installations.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification and the applicable specification sheet.
(b) Complete Military part number.
(c) If first article inspection is required (see 3.2).
(d) Whether samples are to be forwarded to NAVSSES, Phila and whether they are to be considered as part of the quantity ordered (see 4.1.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

(e) Location of first article inspection, if other than contractor's plant (see 4.5).
(f) Level of packaging and packing required and special marking, if applicable (see 5.1 and 5.2).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DoD FAR Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph no.	Data requirement title	Applicable DID no.	Option
3.3.1 and 4.3	Records objective quality evidence for submarine safety/material certification	UDI-H-26373	---
3.3.1.2 (b)(3)	Chart, time vs temperature	UDI-H-26373	---
3.3.1.2 (a)(2)	Test report, physical properties	UDI-H-26373	---
3.3.1.2 (b)(4)	Certified calibration records	UDI-H-26373	---
3.7.1	Assembly sheet	DI-E-7031	---
4.1.1	Inspection system program plan	DI-R-4803	---
4.1.2	Test report	DI-T-2072	10.1b

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.2.2.1 The data requirements of 6.2.2 and any task in section 3, 4, or 5 of this specification required to be performed to meet a data requirement may be waived by the contracting/acquisition activity upon certification by the offeror that identical data were submitted by the offeror and accepted by the Government under a previous contract for identical item acquired to this specification. This does not apply to specific data which may be required for each contract regardless of whether an identical item has been supplied previously (for example, test reports).

6.3 First article. When a first article inspection is required, the items should be a first article sample. The first article should consist of one unassembled and two assembled units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Sub-contracted material and parts. The packaging requirements of of referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.5 Cross index. The specification sheets associated with this specification cover hull fittings which were previously covered by single Service Drawings. Table V is a cross index of the fittings, single Service Drawings, and specification sheet.

TABLE V. Cross index of hull fittings, drawing, and specification sheet.


Type	Formerly covered Drawing no.	Specification sheet
UG1404/U	REC49412	MIL-H-21367/19
UG1405/U	REB49415	20
UG1406/U	REC49417	21
UG1407/U	REB49411	22
UG1408/U	REC49416	23
UG1421/U	REC49418	24
UG1423/U	REC49426	25
UG1424/U	REC49427	26
UG1439/U	REC49440	27
UG1495/U	REB49428	28
MX1203/U	REC49137	15
MX2632/U	REC49396	16
MX2326/U	REB49336	11, 12
MX2327/U	REB49366	9, 10
MX2646/U	REB49397	13, 14
MX7637/U	NUSL00841-D-1	7
MX-7637/U(Long Body)	NUSL00852-D-1	8
MX8208/B	SS302-2477255	1
MX8209/B		2
MX8210/B		3
MX8211/B		4
MX8212/B		5
MX8213	SS302-2477255	6
Blanking plug	NUSL-44533-0	17
Blanking plug		18

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Preparing activity:
Navy - SH
(Project 5935-N196)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

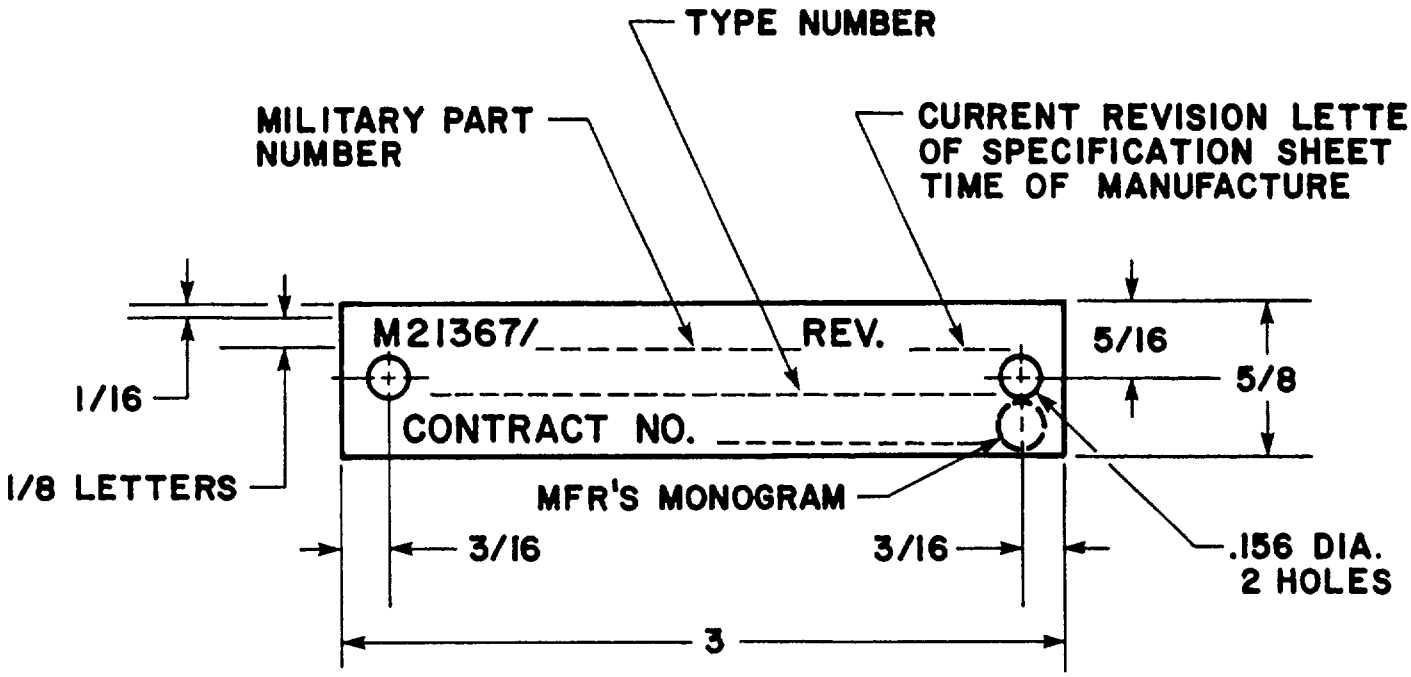

SH 12772

FIGURE 1. Identification plate for stuffing tubes.

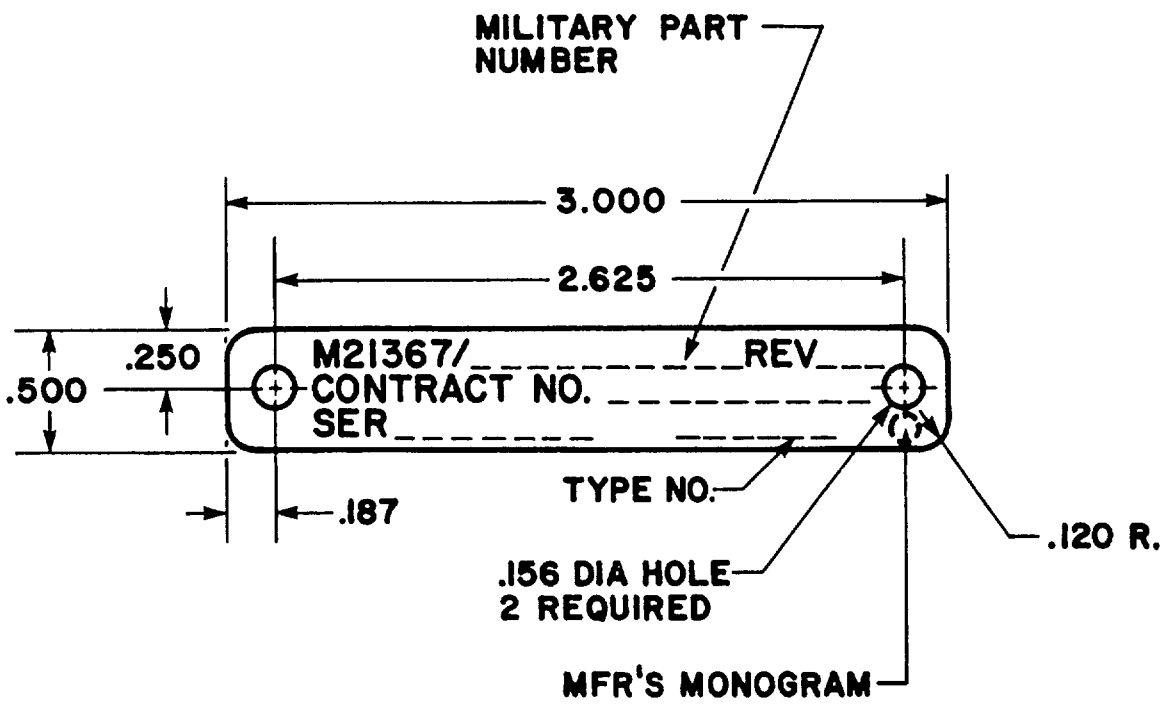

SH 12773

FIGURE 2. Identification plate for connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

APPENDIX

Usage Data

10. SCOPE

10.1 Scope. This appendix describes the uses of the various connectors, adapter, end seals, stuffing tubes, and blanking plugs. Cable data is also provided, however, some cables listed are not to be used for replacement or new construction. Refer to MIL-C-22667, MIL-C-23020 and MIL-C-17 for the current listings of cables.

20. APPLICABLE DOCUMENTS

20.1 Government documents.

20.1.1 Specifications. The following specifications form a part of this appendix to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

MILITARY

MIL-C-17	- Cables, Radio Frequency; Coaxial, Flexible and Semirigid, General Specification for.
MIL-C-22667	- Cable, Special Purpose, Buoyant, Electrical, Type RG-298/U (Submarine Use).
MIL-C-23020	- Cable, Coaxial (for Submarine Use).
MIL-C-24231/25	- Connector, Hull Inserts.

(Copies of specifications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity)

30. USAGE

30.1 Usage data. Table VI lists the hull listings by type and military part number, identifies the cables to which they are assembled, and shows the respective mating connectors, adapter, end seals or in the case of the stuffing tubes, the matching blanking plugs or hull insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Hull fitting usage-data.

Type	Military part no. M21367/	Description	Cable(s)	Use with
UG1404/U	19-001	Adapter	RG-298/U	MX1203/U MX2632/U
UG1405/U	20-001	Plug	RG-218/U	UG-1406/U
UG1406/U	21-001	Receptacle	---	UG-1405/U UG-1421/U
UG1407/U	22-001	Plug	RG-218/U	UG-1408/U
UG1408/U	23-001	Receptacle	---	UG-1407/U UG-1421/U
UG1421/U	24-001	Plug	RG-296/U	UG-1406/U UG-1408/U
UG1423/U	25-001	Plug	RG-14A/U RG-217/U	
UG1424/U	26-001	Plug	RG14A/U RG-217/U	UHF CONN (Flange mtd)
UG1439/U	27-001	Receptacle	RG14A/U RG293A/U	UG709B/U M39012/15-0002 2/
UG1495/U	28-001	Receptacle	RG-14A/U RG-217/U RG-293A/U	UG-709B/U M39012/15-0002 2/
MX1203/U	15-001	End seal	RG-17A/U RG-218/U	UG1404/U Antenna cable
MX2632/U	16-001	End seal	RG-14A/U RG-217/U	UG-1404/U Antenna cable
MX2326/U MX2326/U(LB)	11-001 12-001	Stuffing tube	RG-17A/U RG-218/U RG-295/U	---
MX2327/U MX2327/U(LB)	9-001 10-001	Stuffing tube	RG-14A/U RG-217/U RG-293A/U	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Hull fitting usage-data. - Continued

Type	Military part no. M21367/	Description	Cable(s)	Use with
MX2646/U MX2646/U(LB)	13-001 14-001	Stuffing tube	RG-130A/U RG-294A/U	---
MX7637/U	7-001	Stuffing tube	RG-293A/U	M24231/25-001 1/
MX7637/U(LB)	8-001	Stuffing tube	RG-293A/U	M24231/25-002 1/
MX8208/U	1-001	Stuffing tube	RG-14A/U RG-217/U RG-293A/U	M24231/25-001 1/
MX8209/U	2-001	Stuffing tube	RG-17A/U	M24231/25-001 1/
MX8210/U	3-001	Stuffing tube	RG-294A/U	M24231/25-001 1/
MX8211/U	4-001	Stuffing tube	RG-14A/U RG-217/U RG-293A/U	M24231/25-001 1/
MX8212/U	5-001	Stuffing tube	RG-17A/U RG-218/U	M24231/25-002 1/
MX8213/U	6-001	Stuffing tube	RG-130/U RG-294A/U	M24231/25-002 1/
Blanking plug	17-001 17-002	Blanking plug	--	MX2327/U MX2327/U(LB)
Blanking plug	17-003 17-004	Blanking plug	--	MX2326/U MX2326/U(LB)
Blanking plug	17-005 17-006	Blanking plug	--	MX2646/U MX2646/U(LB)
Blanking plug	18-001 18-002	Blanking plug	--	MX7637/U MX7637/U(LB)

1/ MIL-C-24231/25.
2/ MIL-C-39012/15 - Inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side) FREQUENCY CABLES

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-H-21367E(SH)	TUBES FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-HULL FITTINGS: CONNECTORS, ADAPTER, END SEALS, AND STUFFING

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:22Z
Check the source to verify that this is the current version before use.