MILITARY SPECIFICATION SHEET

# HULL FITTING, STUFFING TUBE, TYPE MX8208/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

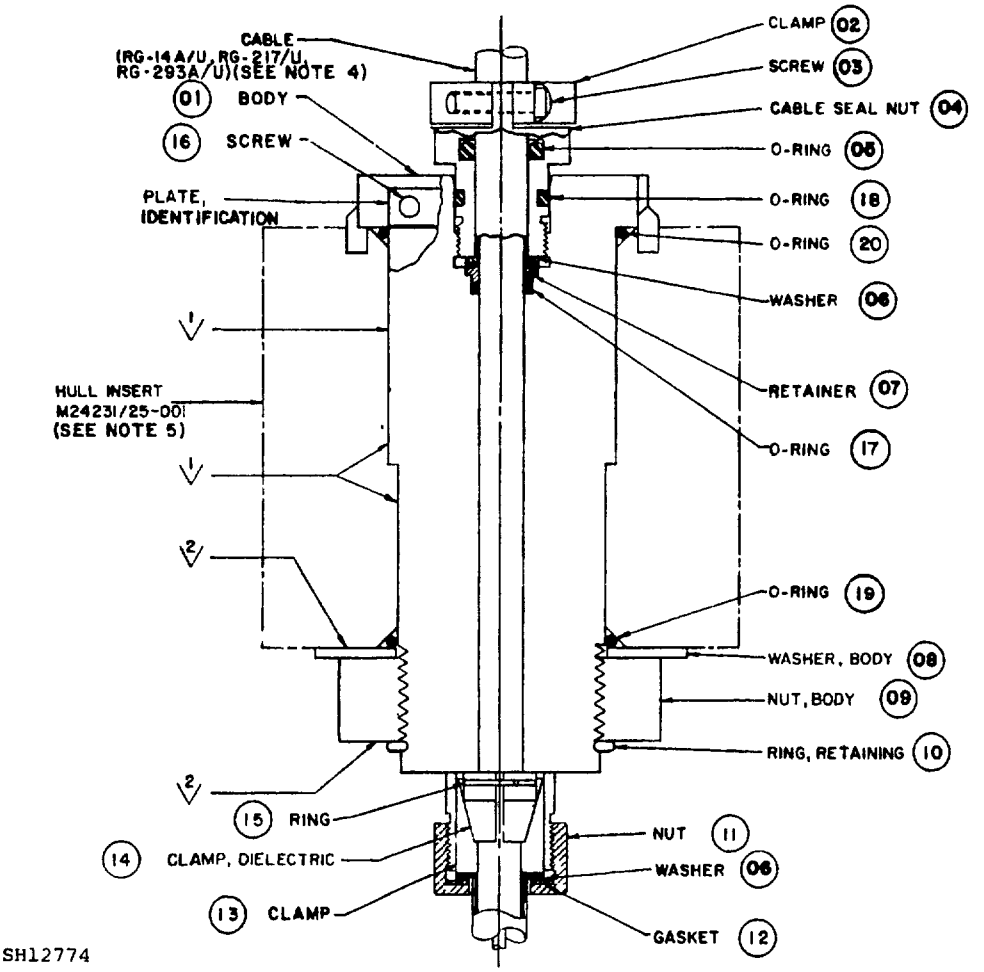


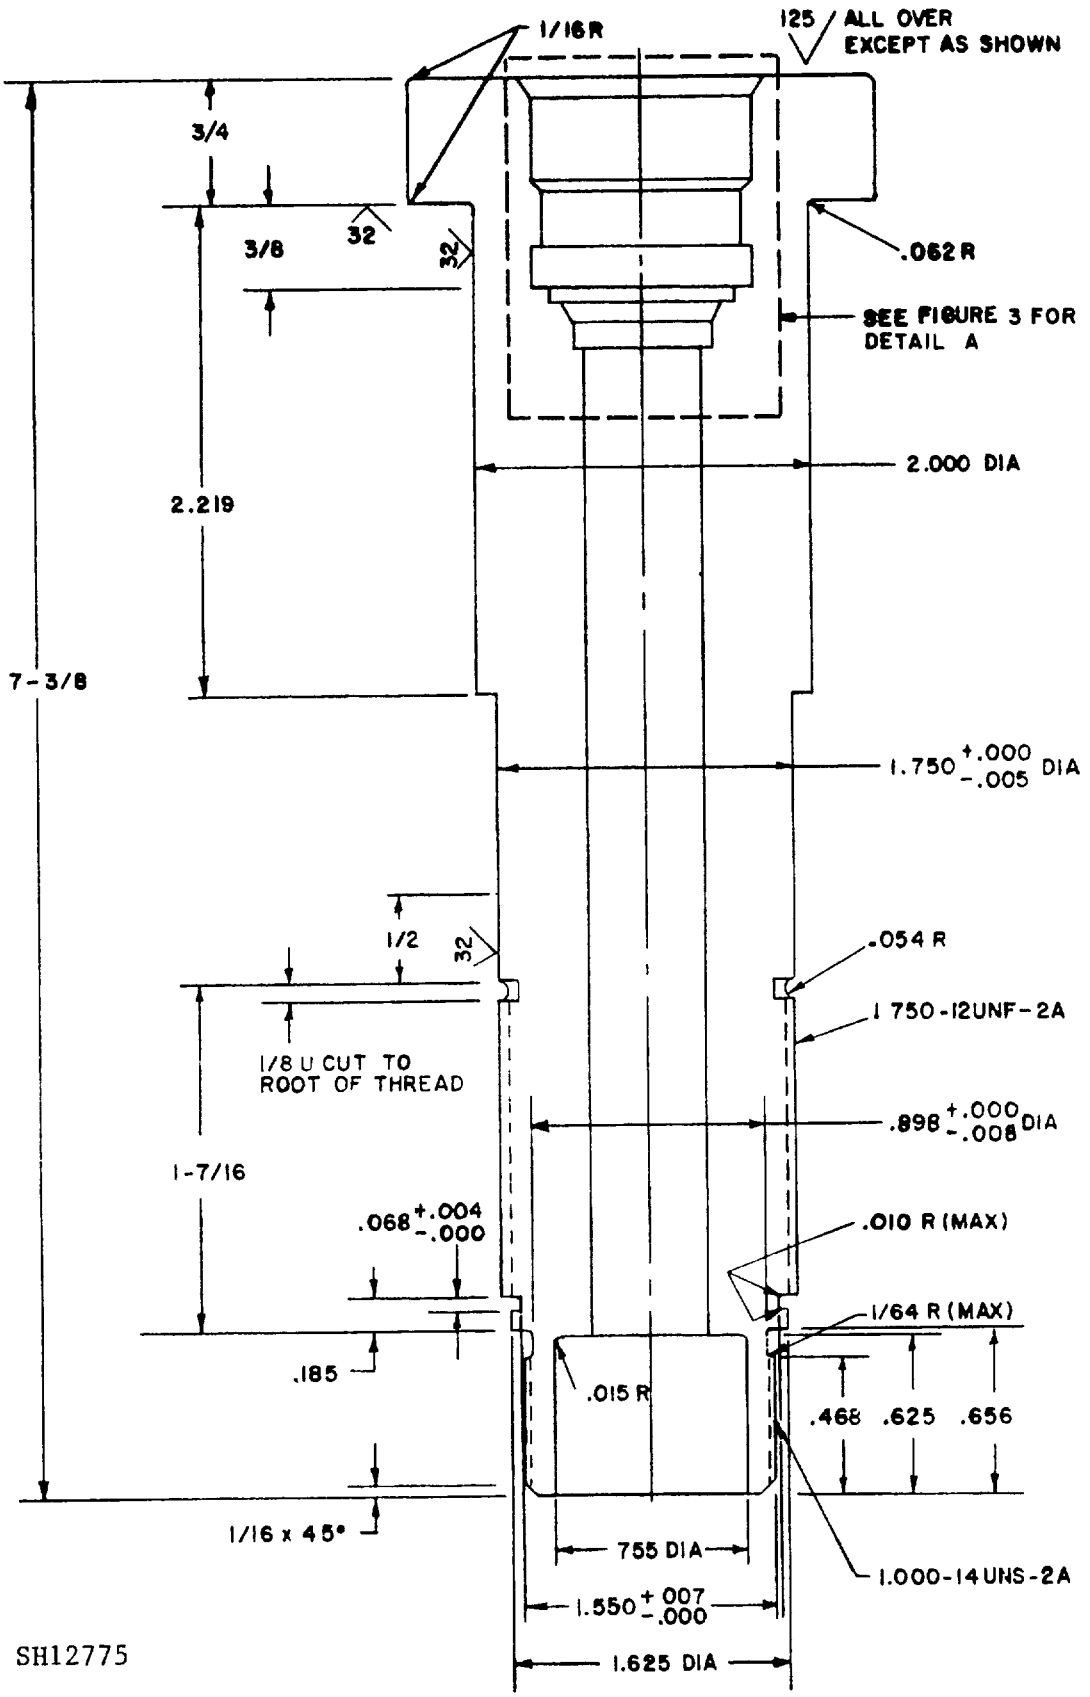

FIGURE 1. Assembly M21367/1-001(MX8208/U).

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil -- Downloaded: 202640-19T09:23Z
Check the source to verify that this is the current version before use.




(01) FIGURE 2. Body.



Source: https://assist.dla.mil -- Downloaded: 202640-19T09:23Z
Check the source to verify that this is the current version before use.

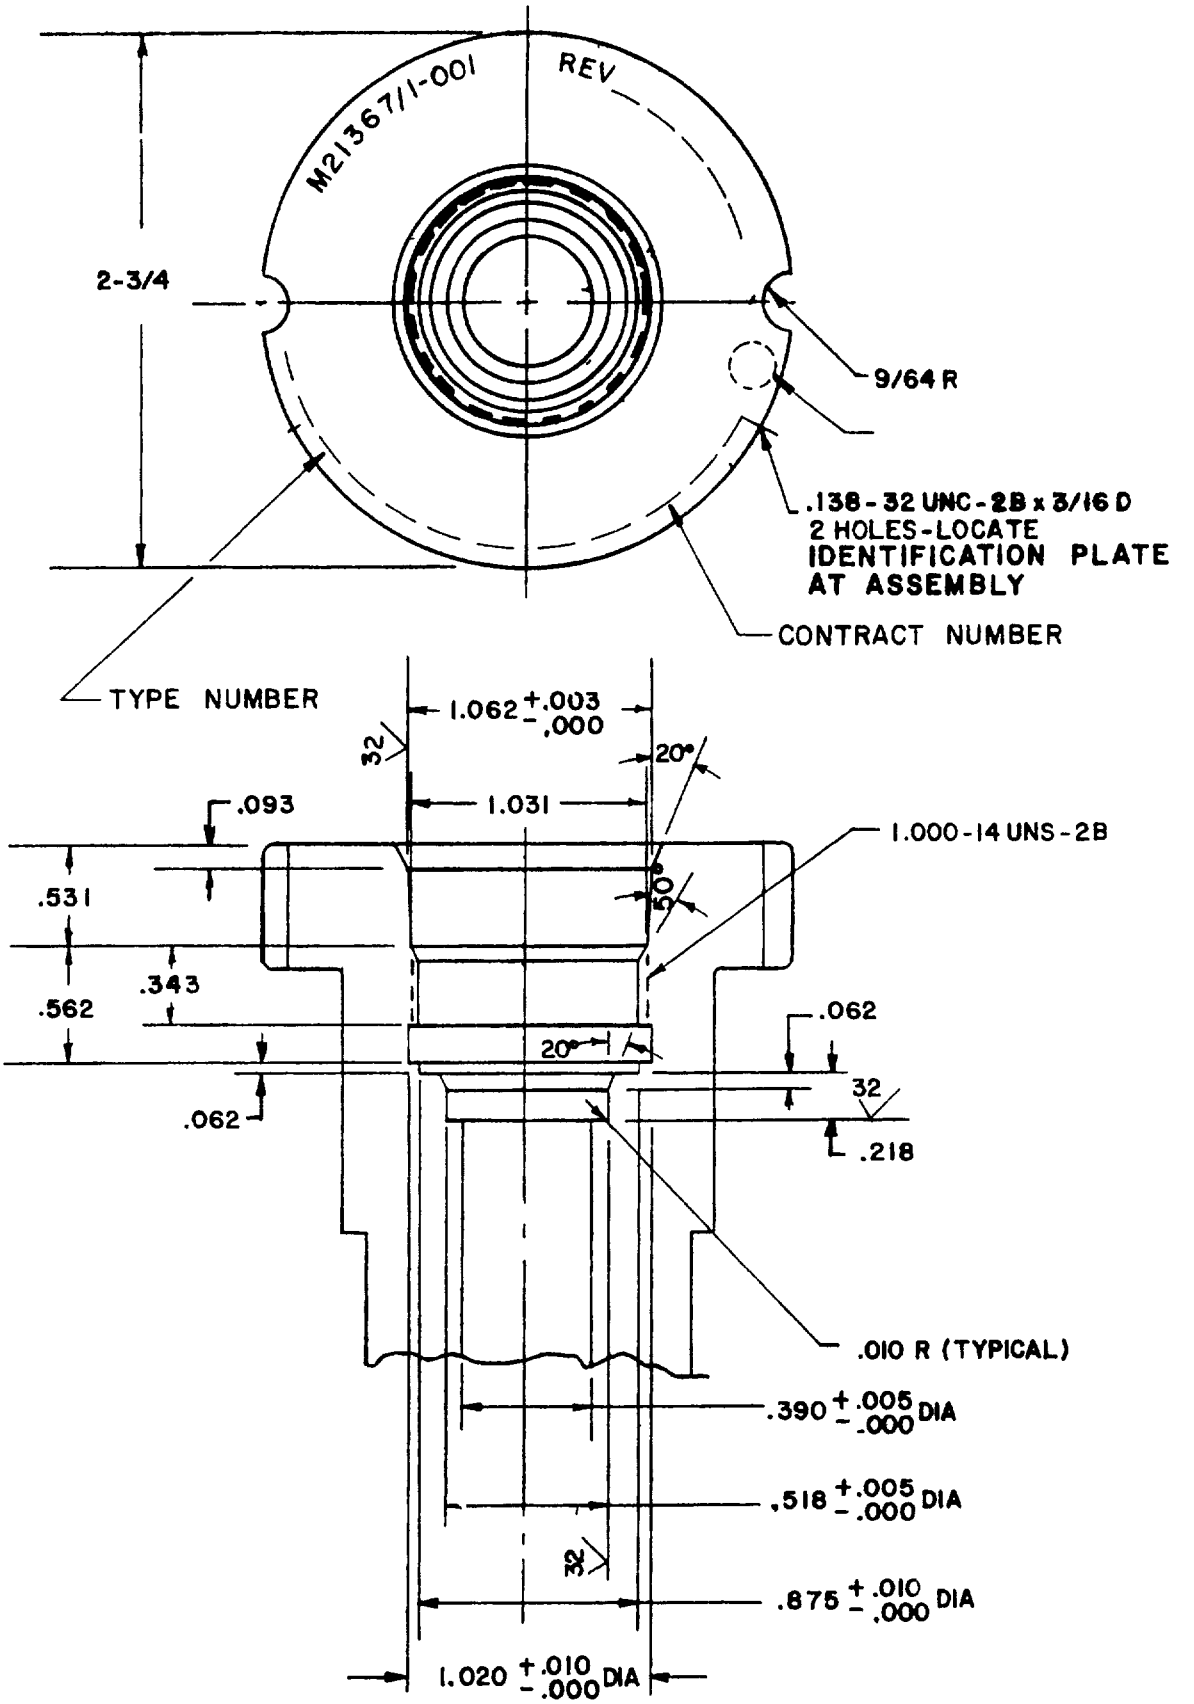
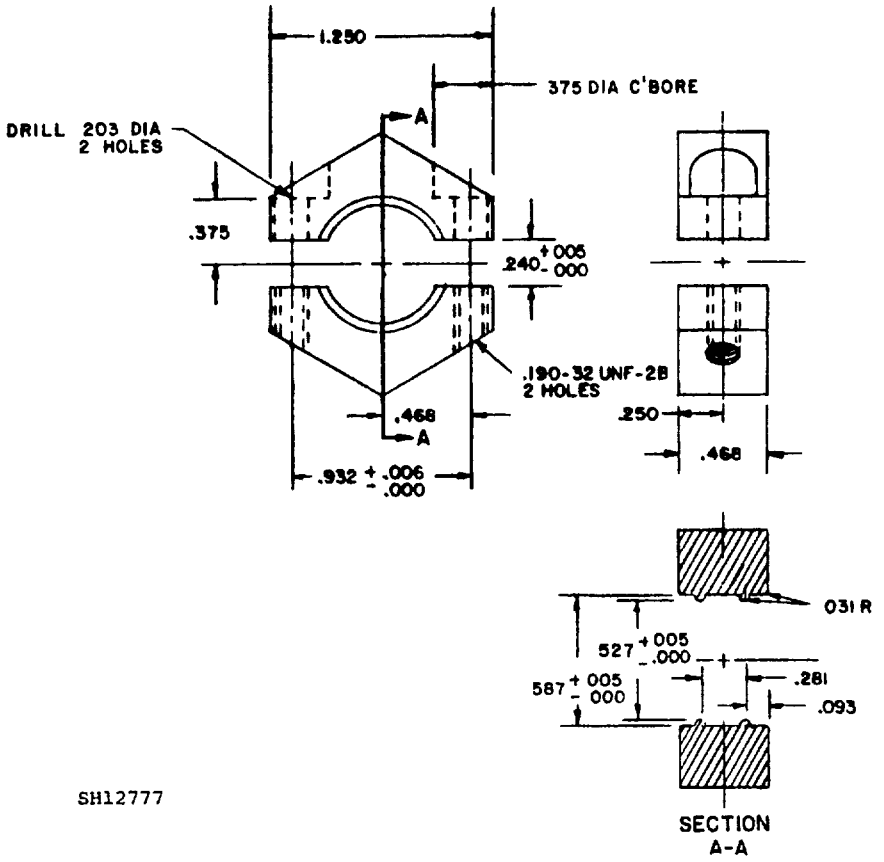


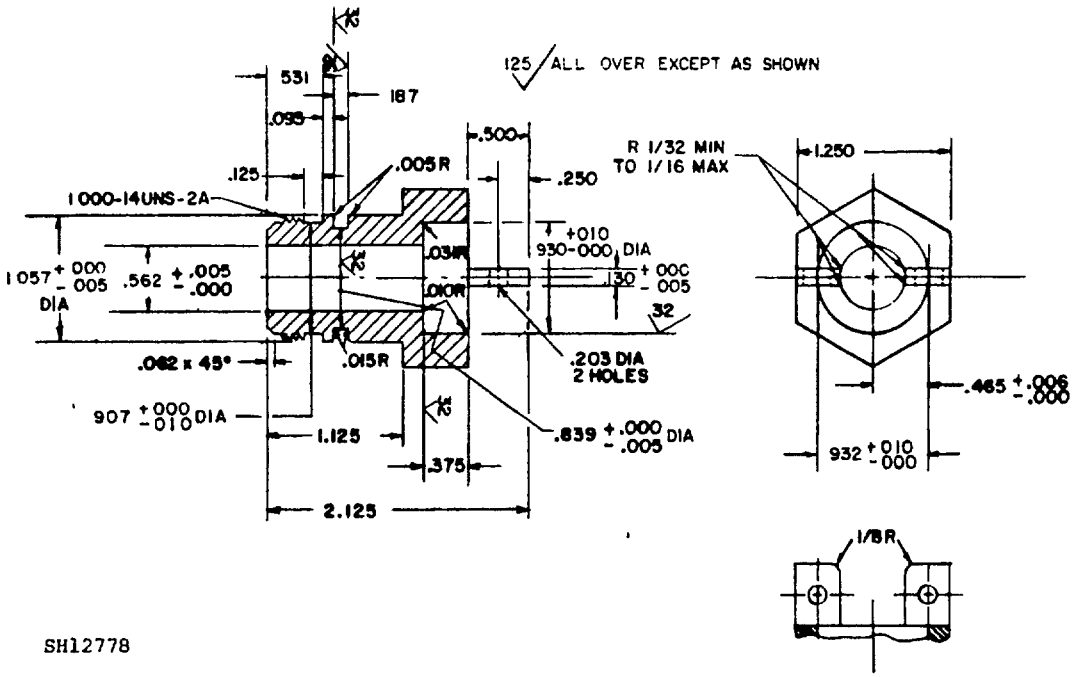

FIGURE 3. Body (detail A).



Source: https://assist.dla.mil -- Downloaded: 202640-19T09:23Z
Check the source to verify that this is the currentversion before use.



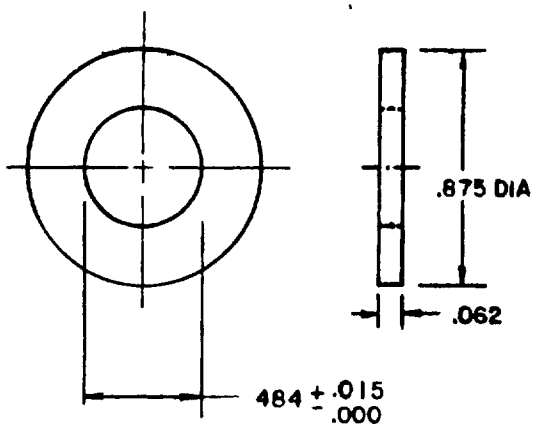

02 FIGURE 4. Clamp.




04 FIGURE 5. Cable seal nut.

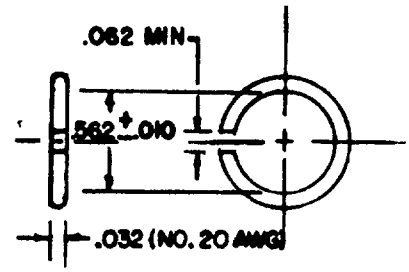


Source: https://assist.dla.mil -- Downloaded: 202640-19T09:23Z
Check the source to verify that this is the current version before use.



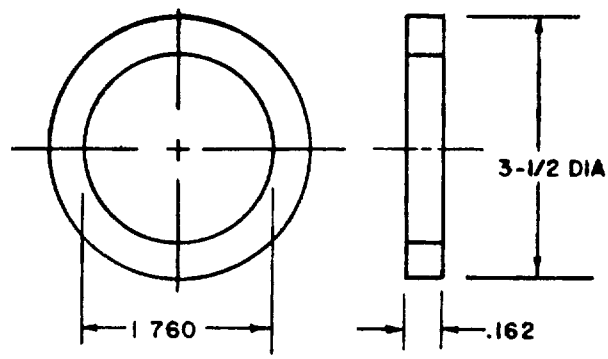

SH12779

06 FIGURE 6. Washer.



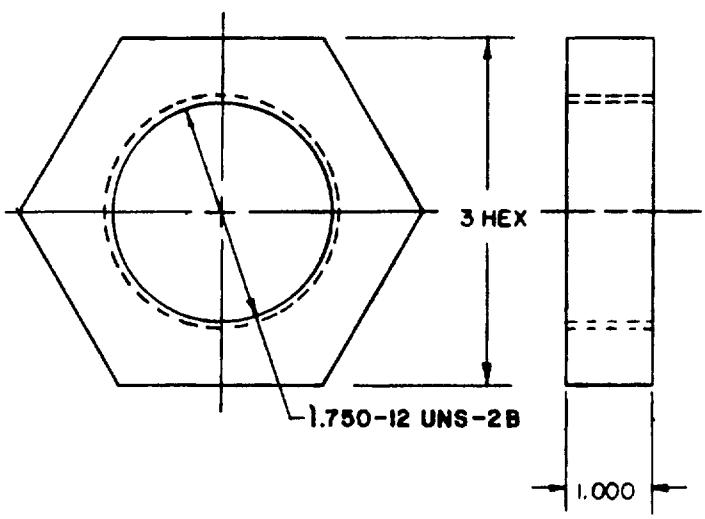

SH12780

15 FIGURE 7. Ring.



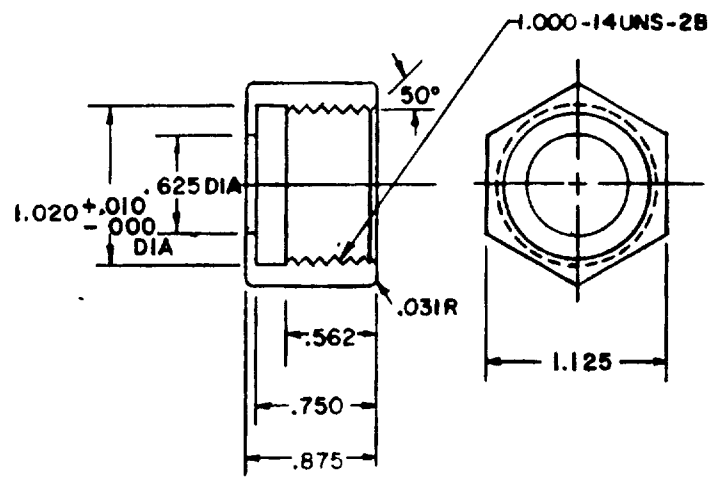

SH12781

08 FIGURE 8. Body washer.




SH12782

09 FIGURE 9. Body nut.

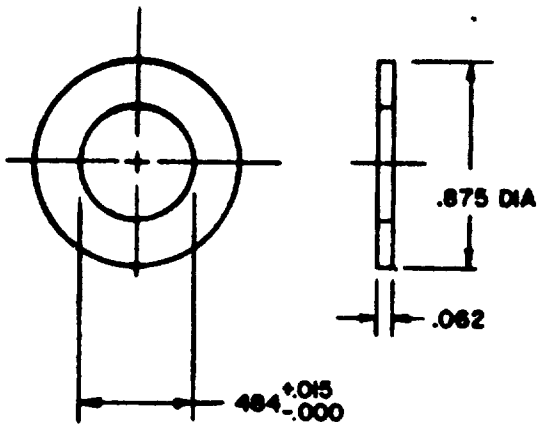



SH12783

11 FIGURE 10. Nut.

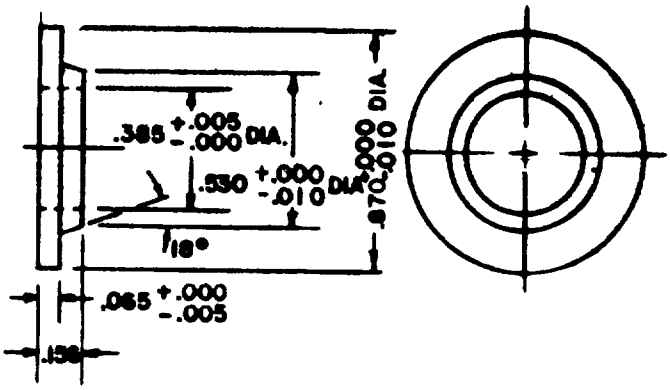


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.



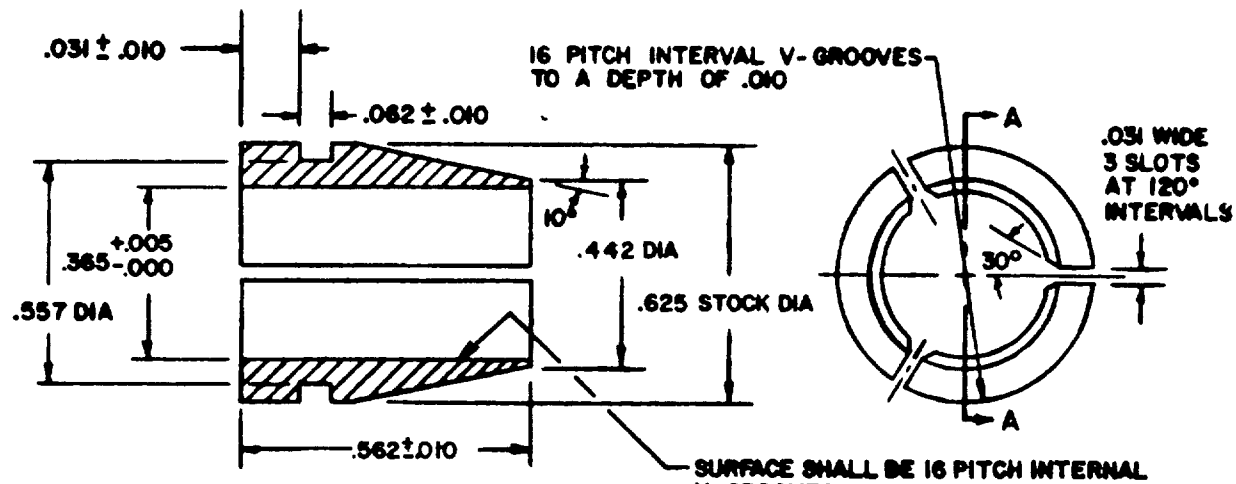

SH12784

12 FIGURE 11. Gasket.



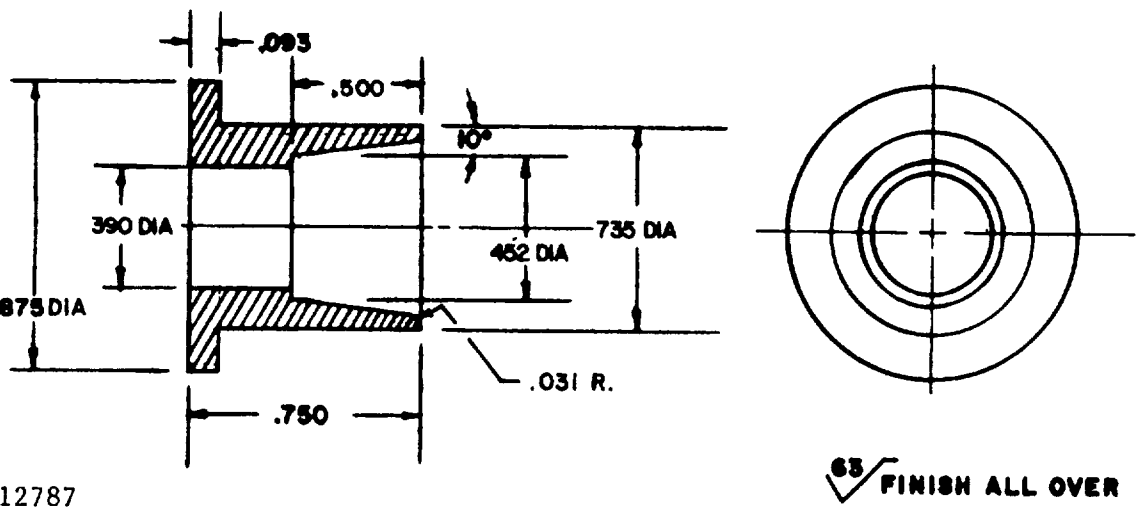

SH12785

07 FIGURE 12. Retainer.




SH12786

14 FIGURE 13. Dielectric clamp.




SH12787

13 FIGURE 14. Clamp.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

| Item no.1/ | Description | Fig | Qty | Material/spec | Formerly covered on Drawing |
|---|---|---|---|---|---|
| 01 | Body | 2 | 1 | NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH | SS-302-2477255-3 |
| 02 | Clamp | 4 | 1 | NI-AL-BRZ, MIL-B-24059 | REB101375-2 |
| 03 | Socket Head Cap Screw 0.190-32, UNF-2A x 3/4 L | | 2 | NI-CU Alloy, QQ-N-281 CL A | - |
| 04 | Cable Seal Nut | 5 | 1 | NI-AL-BRZ, MIL-B-24059 | REB101374-2 |
| 05 | O-ring | | 1 | REA10083/16, MIL-P-25732 | |
| 06 | Washer | 6 | 2 | NI-CU-Alloy, QQ-N-281 CL A | REA10036-96 |
| 07 | Retainer | 12 | 1 | NI-AL-BRZ, MIL-B-24059 | REA101433-1 |
| 08 | Body Washer | 8 | 1 | NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH | SS-302-2477255-9 |
| 09 | Body Nut | 9 | 1 | NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH | SS-302-2477255-11 |
| 10 | Retaining Ring | | 1 | TRUARC-Type 5100-162W or equal | - |
| 11 | Nut | 10 | 1 | NI-AL-BRZ, MIL-B-24059 | REB101435-1 |
| 12 | Gasket | 11 | 1 | Nylon, Type VI of MIL-M-20693 | REB10021-100 |
| 13 | Clamp | 14 | 1 | NI-AL-BRZ, MIL-B-24059 | REB101436-1 |
| 14 | Dielectric Clamp | 13 | 1 | NI-AL-BRZ, MIL-B-24059 | REB10912-2 |
| 15 | Ring | 7 | 1 | Brass, QQ-W-321, Cond Spring, Comp. B | REB10042-7 |
| 16 | Round Head Mach Screw 0.138-32, UNC-2A x 3/16 L | | 2 | NI-CU alloy, QQ-N-281 CL A | - |
| 17 | O-Ring | | 1 | MS28775-110 | - |
| 18 | O-Ring | | 2 | MS28775-211 | - |
| 19 | O-Ring | | 1 | MS28775-327 | - |
| 20 | O-Ring | | 1 | MS28775-329 | - |

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/1-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerances shall be plus or minus 1/2 degree.
4. Type RG-14A/U cable conforms to MIL-C-23020/6, RG-217 conforms to MIL-C-17/78 and type RG-293A/U conforms to MIL-C-23020/1.
5. Hull insert M24231/25-001 conforms to MIL-C-24231/25.
6. Formerly covered on NAVSEA Drawing NAVSHIPS SS302-2477255, assembly number-1.

Preparing activity:
Navy - SH
(Project 5975-N578-1)



Source: https://assist.dla.mil -- Downloaded: 20260-19T09:23Z
Check the source to verify that this is the current version before use.