
MILITARY SPECIFICATION SHEET

HULL FITTING, STUFFING TUBE, TYPE MX8209/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

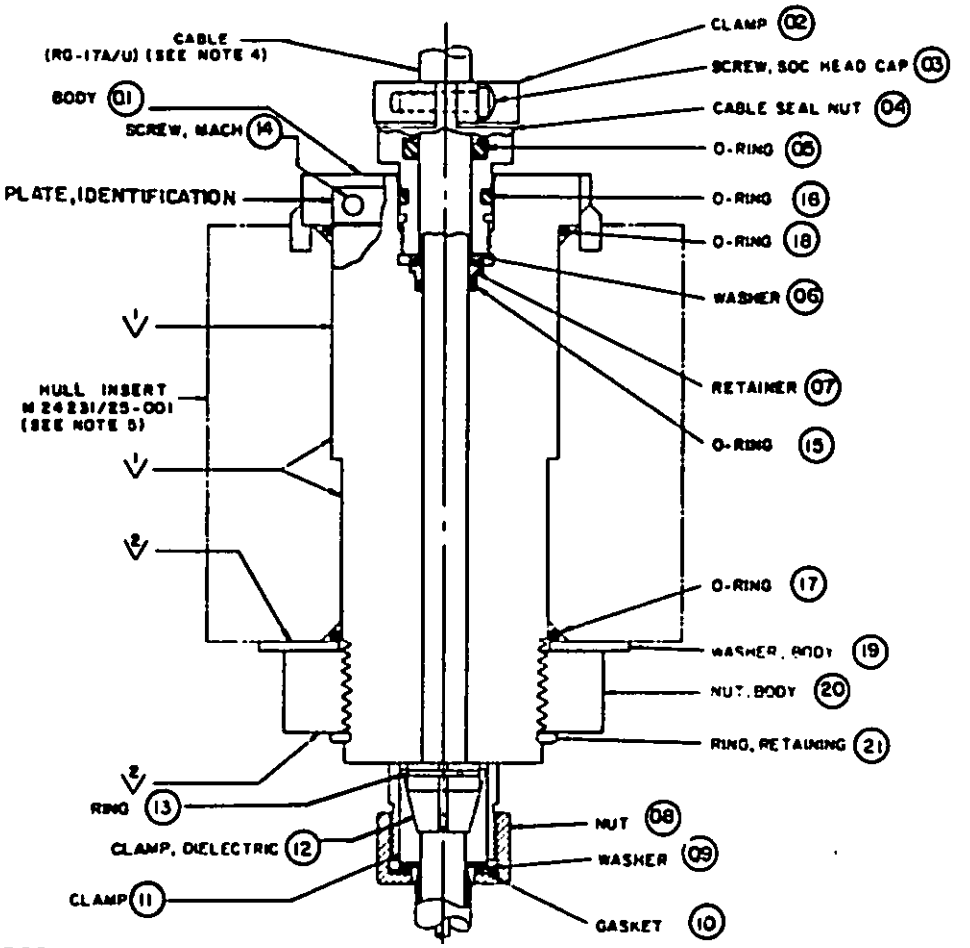

SH12788

1/ BRINELL HARDNESS READING SHALL BE TAKEN AT THESE POINTS.


2/ BRINELL HARDNESS READING SHALL BE TAKEN AT THIS FACE AT 120° DEGREE INTERVALS.

FIGURE 1. Assembly M21367/2-001 (MX8209/U).

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

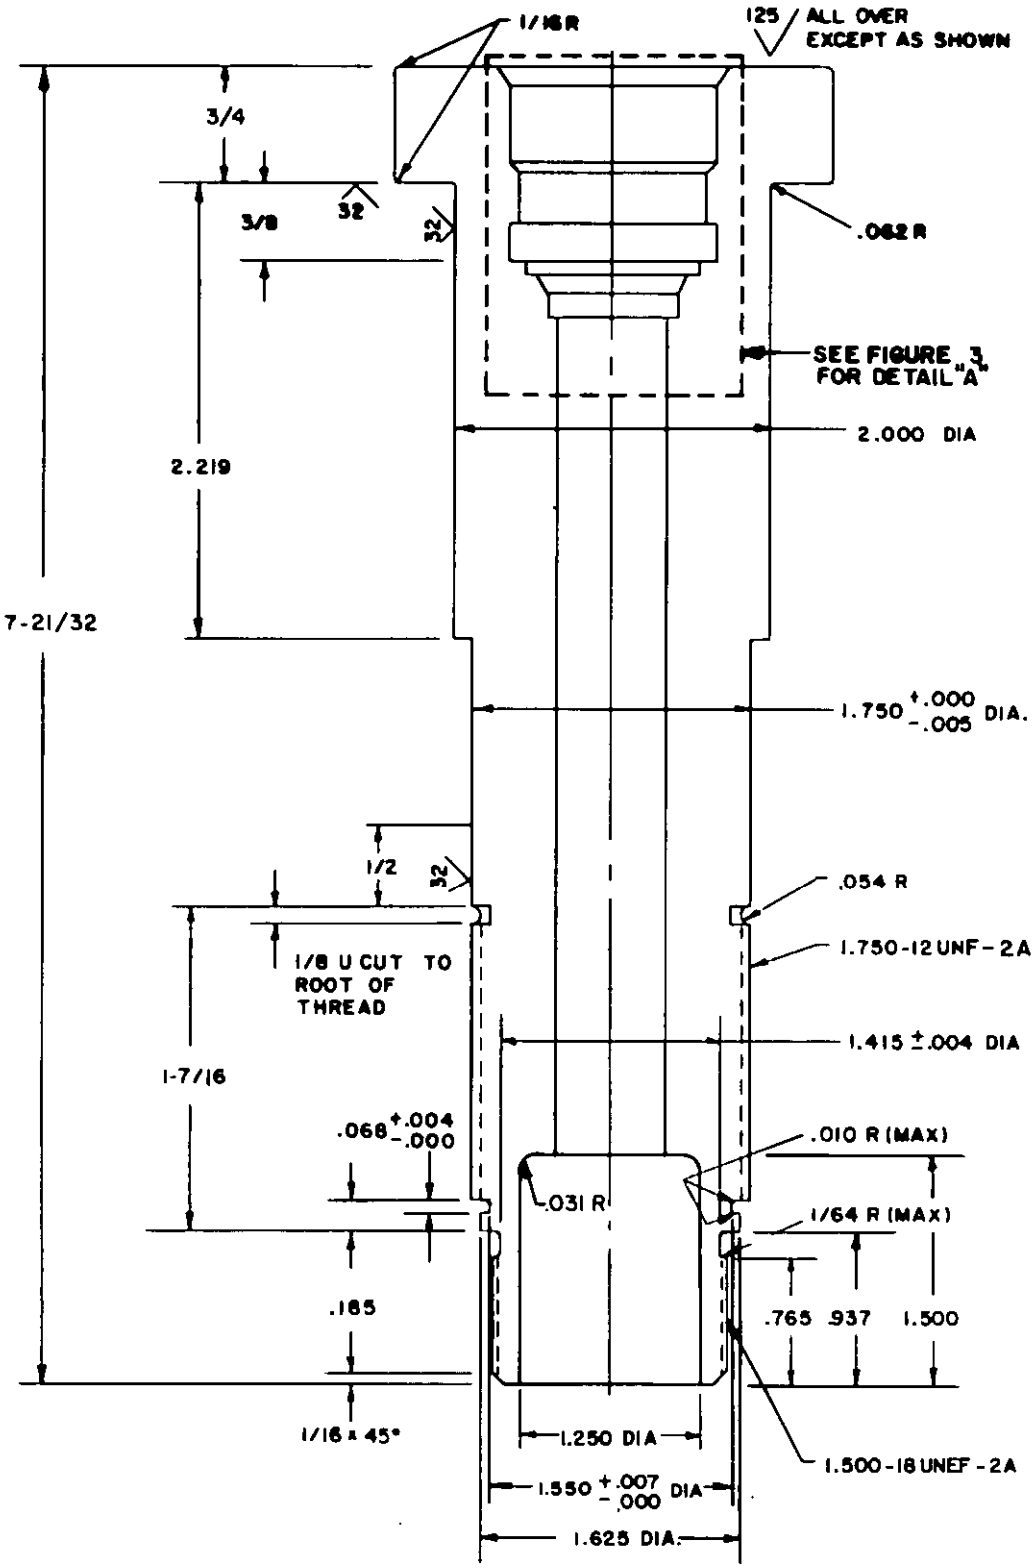

SH12789

(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.


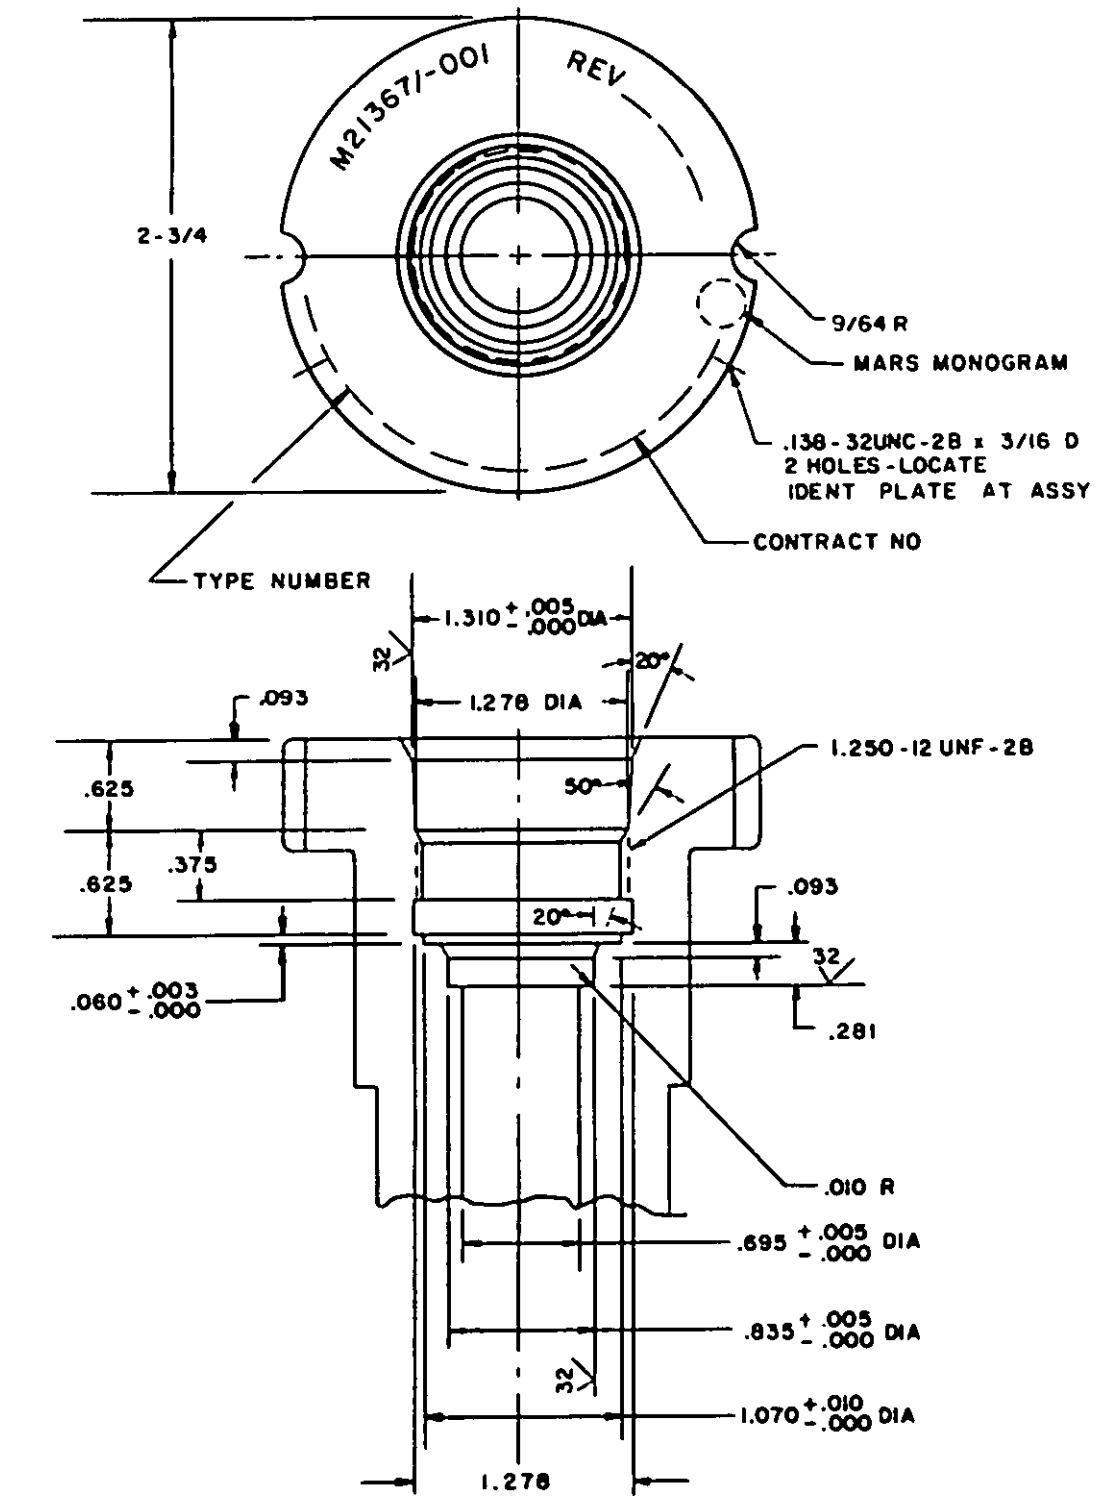



FIGURE 3. Body (detail A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

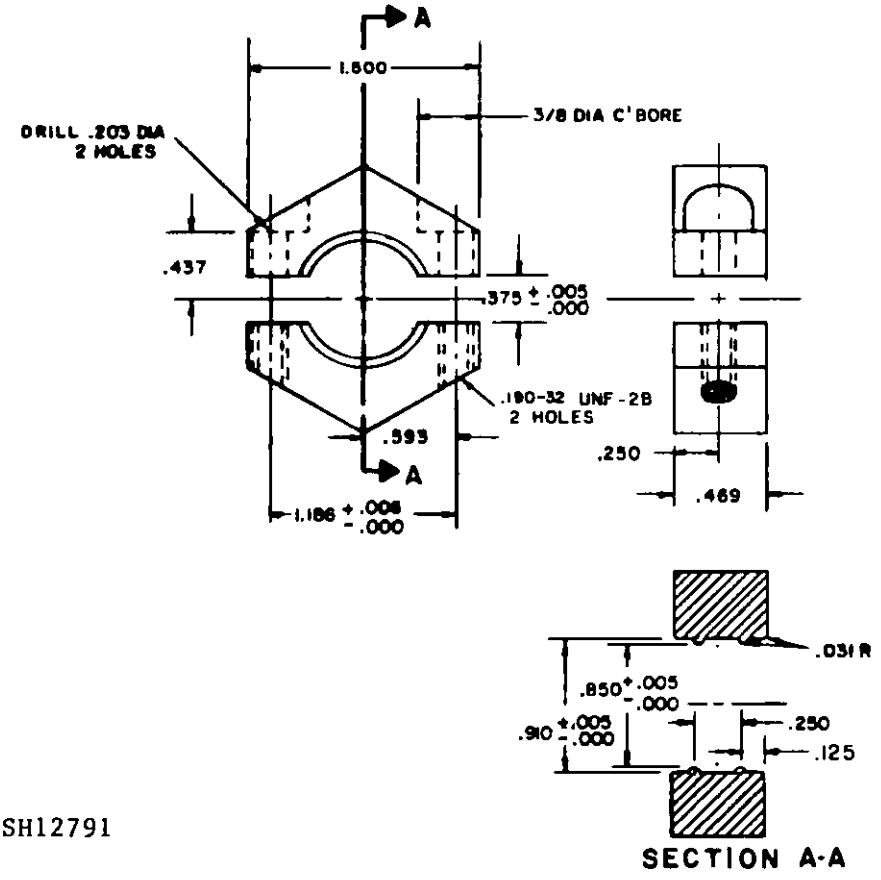

SH12791


02 FIGURE 4. Clamp.

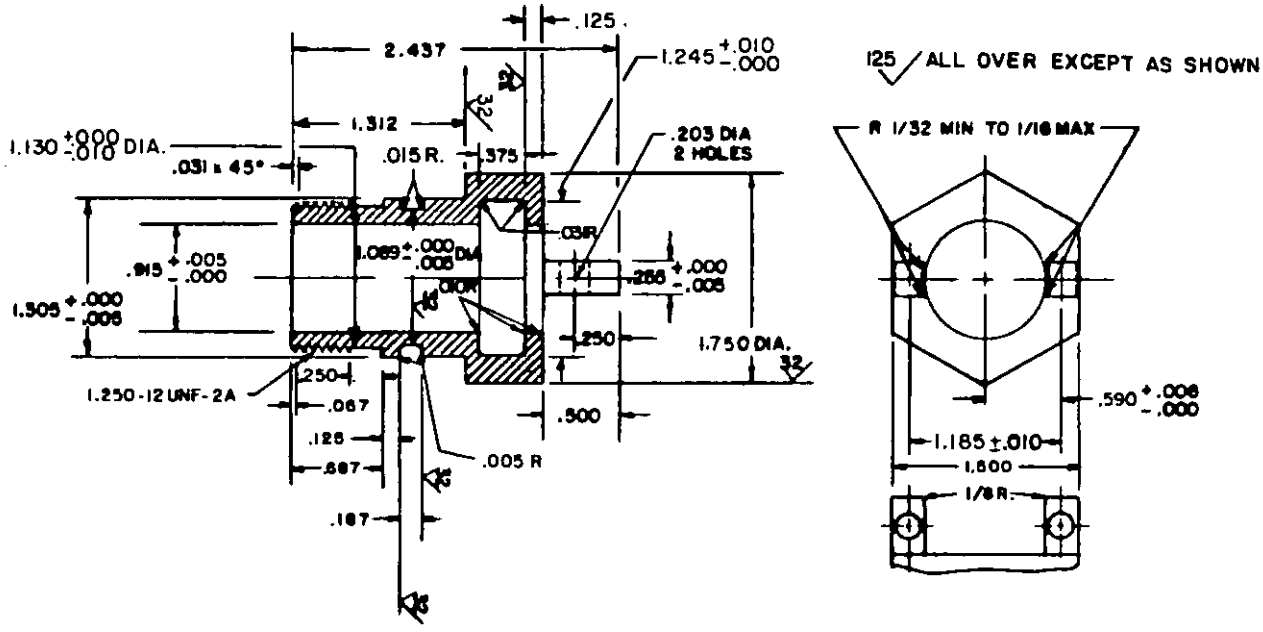

SH12792


04 FIGURE 5. Cable seal nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

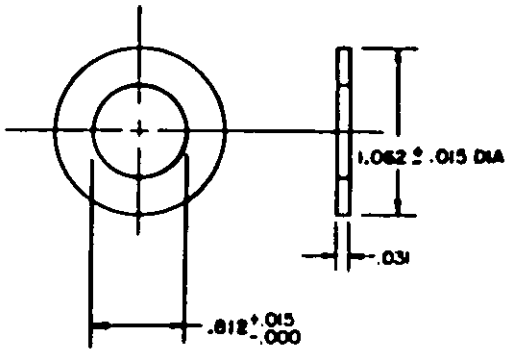


SH12793

06 FIGURE 6. Washer.

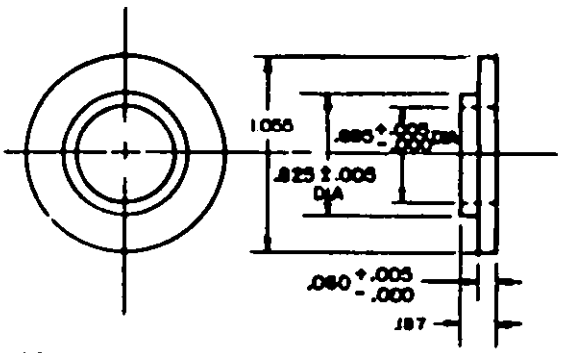


SH12794

07 FIGURE 7. Retainer.

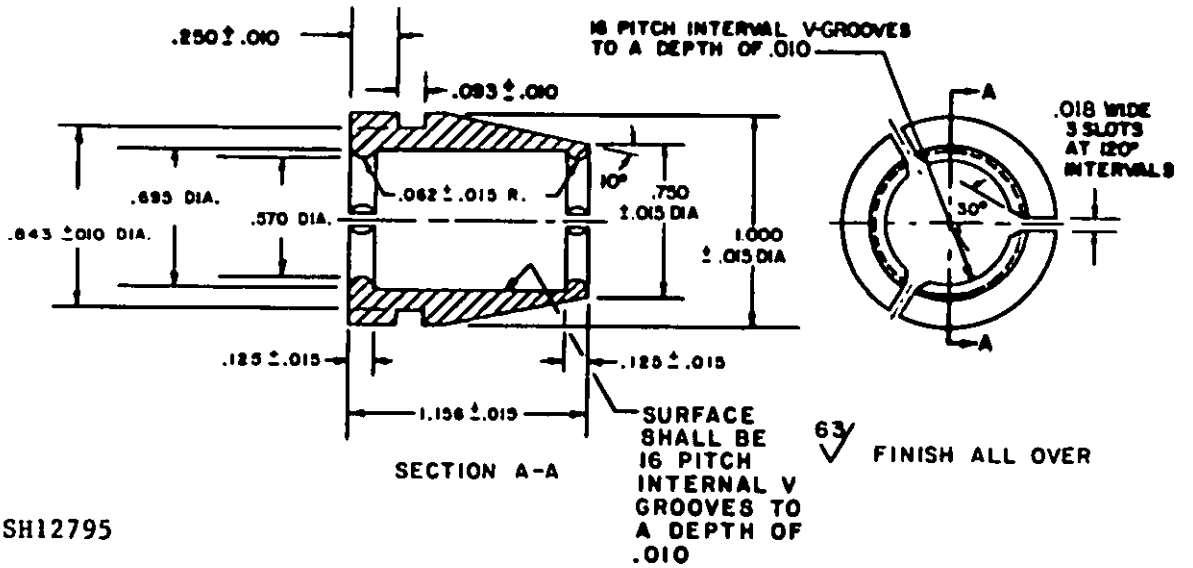

SH12795


12 FIGURE 8. Dielectric clamp.

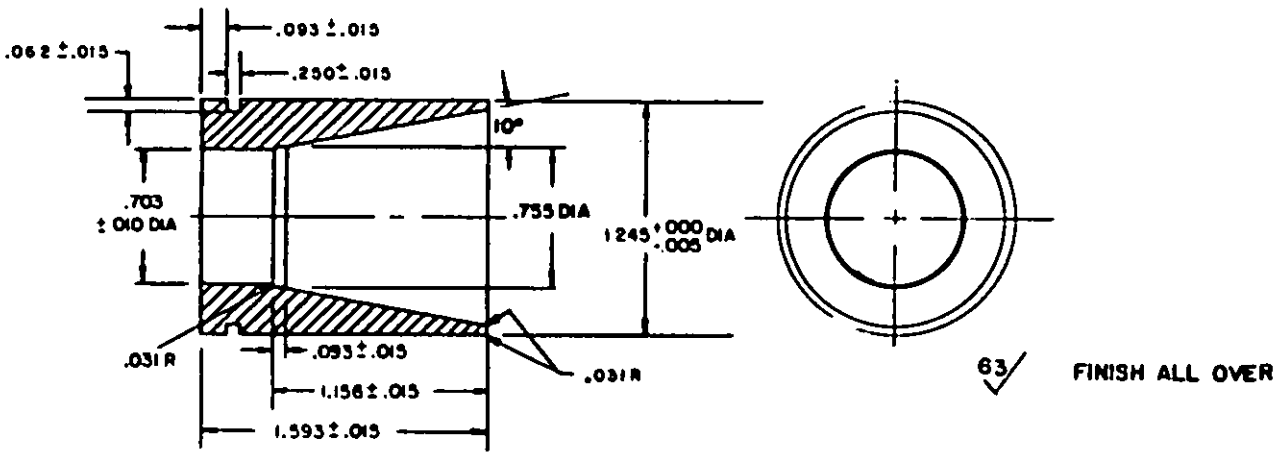

SH12796


11 FIGURE 9. Clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

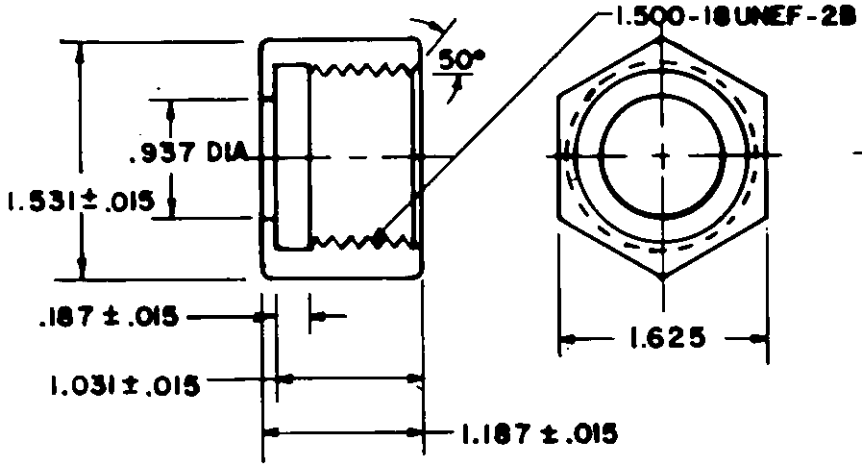


SH12797

08 FIGURE 10. Nut.

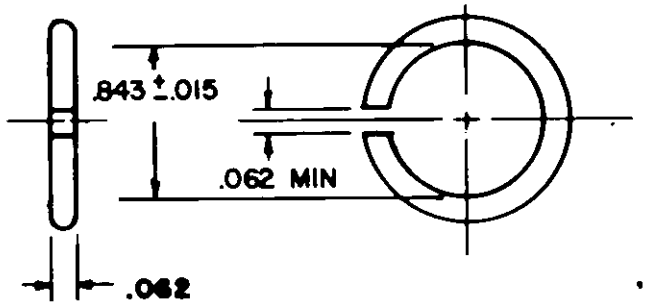


SH12798

13 FIGURE 11. Ring.

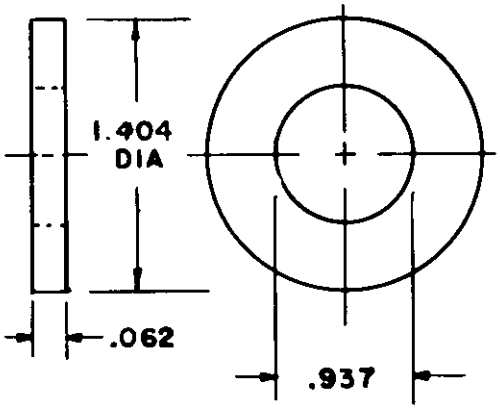

SH12799

10 FIGURE 12. Gasket.

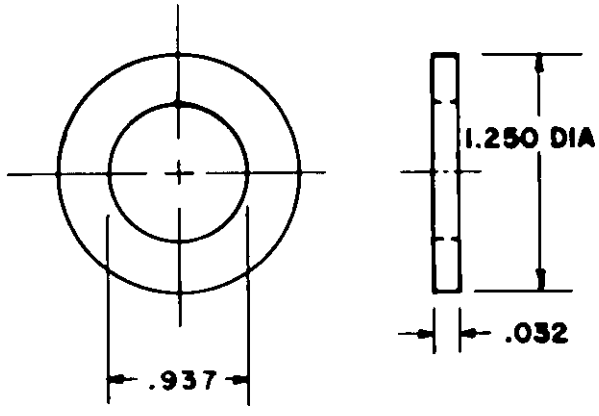

SH12800

09 FIGURE 13. Washer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no. 1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	SS-302-2477255-4
02	Clamp	4	1	NI-AL-BRZ, MIL-B-24059	REB101375-1
03	Socket Head Cap Screw 0.190-32, UNF-2A x 7/8 L		2	NI-CU Alloy, QQ-N-281 CL A, AN and AH	-
04	Cable Seal Nut	5	1	NI-AL-BRZ, MIL-B-24059	REB101770
05	O-ring		1	REA10083-15, MIL-P-25732	
06	Washer	6	1	NI-CU-Alloy, QQ-N-281 CL A	REB10036-94
07	Retainer	7	1	NI-AL-BRZ, MIL-B-24059	REB101614-2
08	Nut	10	1	NI-AL-BRZ, MIL-B-24059	REB10911
09	Washer	13	1	NI-CU Alloy, QQ-N-281, CL A	REA10036-57
10	Gasket	12	1	Nylon, MIL-M-20693, Type VI	REB10021-101
11	Clamp	9	1	NI-AL-BRZ, MIL-B-24059	REB10913
12	Dielectric Clamp	8	1	NI-AL-BRZ, MIL-B-24059	REB10912-1
13	Ring	11	1	Brass, QQ-W-321, Comp. B, Cond. Spring	REB10042-6
14	Round Head Mach Screw 0.138-32, UNC-2A x 3/16 L		2	NI-CU alloy, QQ-N-281 CL A	-
15	O-Ring		1	MS28775-115	-
16	O-Ring		1	MS28775-215	-
17	O-Ring		1	MS28775-327	-
18	O-Ring		1	MS28775-329	-
19	Body Washer		1	MIL-H-21367/1, Fig. 8	-
20	Body Nut		1	MIL-H-21367/1, Fig. 9	-
21	Retaining Ring		1	TRUARC-Type 5100-162W or equal	-

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/2-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-17A/U cable conforms to MIL-C-23020/7.
5. Hull insert M24231/25-001 conforms to MIL-C-24231/25.
6. Formerly covered on NAVSEA Drawing NAVSHIPS SS302-2477255, assembly number -2.

Preparing activity:
Navy - SH
(Project 5975-N578-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.