MILITARY SPECIFICATION

ADAPTER, RADIO FREQUENCY, MX-10158/BRC

This specification is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance, design, manufacture, test, and acceptance requirements for the Radio Frequency (RF) Adapter, MX-10158/BRC, hereinafter referred to as the RF adapter.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standard(s). The following specifications and standard(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-60	Tape: Packaging, Waterproof

MILITARY

MIL-E-16400	Electronic, Interior Communication And Navigation Equipment, Naval Ship And Shore· General Specification For

NAVAL UNDERWATER SYSTEMS CENTER (NUSC) New London Laboratory (NLL)

NUSC-C-342/4141-279	Cable, Radio Frequency, Buoyant, General Specification

STANDARDS

MILITARY

MIL-STD-109	Quality Assurance Terms And Definitions

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Space and Naval Warfare Systems Command (SPAWAR-8111), Washington, DC 20363-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government drawings (DWGs). The following other Government DWGs form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DWGs

MILITARY

NUSC/NLL

NUSC/NLL 02380006	Amplifier/Adapter Assembly Procedure
NUSC/NLL 02381001	Test Plug
NUSC/NLL 02387001	Adapter, Radio Frequency, MX-10158/BRC
RE D 49485	Connector, UG-1820/U

(Copies of specifications, standard(s), and DWGs required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DWGs

SPEARS ASSOCIATES, INCORPORATED (SAI)

SAI C185050	Liner
SAI D185049	Housing Assembly
SAI E185017	Connector, Plug, Electrical (Pin Contact) Antenna Element
SAI E185033	Connector, Plug, Electrical (Socket Contact) Cable Assembly

(Copies of DWGs required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The RF adapter shall be in accordance with MIL-E-16400 to the extent specified herein.

3.1.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.1.2 Description. The RF adapter shall consist of the components specified in a through c:

a. Housing Assembly: SAI DWG D185049
b. Liner: SAI DWG C185050
c. Adapter: NUSC/NLL DWG 02387001

3.2 Characteristics. Characteristics shall be in accordance with 3.2.1 through 3.2.2.5.


3.2.1 Performance. The RF adapter shall interface with Antenna Elements, AS-3435/BRC or AS-3436/BRC, RF Cable Assemblies, CG-3819/BRC or CG-3820/BRC, and Antenna, Transmission Line, AS-3437/BRC of Buoyant Cable Antenna Assembly, AS-3434(V)/BRC. The RF adapter shall permit reception of RF signals over the very low frequency (VLF) and low frequency (LF) and medium frequency (MF) and high frequency (HF) frequency range and transmission of signals over the MF and HF frequency range. The RF adapter shall be mechanically compatible with deployment and retrieval through Antenna Transfer Assemblies, AN/BRA-18( ) and AN/BRA-24( ).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

3.2.1.1 Direct current (DC) resistance. When tested in accordance with 4.5.1, the RF adapter shall conform to the continuity and insulation resistance limits specified in TABLE I.

TABLE I. RF adapter DC resistance requirements (with test cables).

Measurement points (see FIGURE 1)	DC resistance
A and C (continuity)	Less than 0.25 ohms
B and D (continuity)	Less than 0.42 ohms
B and C (insulation)	Greater than 1000 megohms

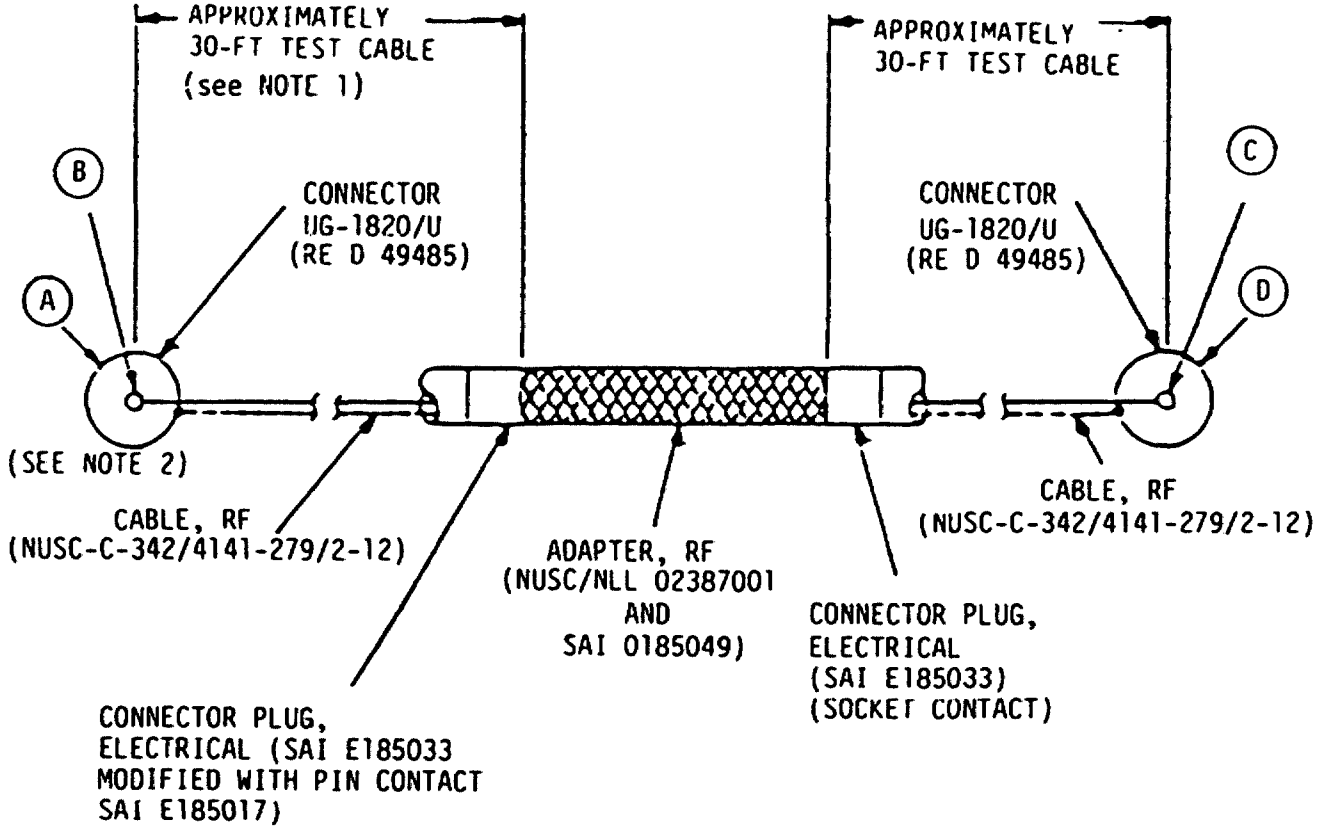

NOTE: 1. FEET
2. CIRCLED LETTERS ARE DC TEST POINTS.

FIGURE 1. RF adapter test assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

3.2.1.2 RF power. The RF adapter shall be capable of withstanding 1000 watts (W) continuous wave (CW) power over the frequency range of 2 megahertz (MHz) to 30 MHz when tested in accordance with 4.5.3. The RF adapter shall exhibit no physical damage as revealed by visual examination, and no electrical degradation as indicated by the DC resistance test of 4.5.1.

3.2.2 Physical characteristics. The RF adapter shall be fabricated and assembled in accordance with this specification and the guidance of DWGs specified in a through d:

a. SAI DWG C185050
b. SAI DWG D185049
c. NUSC/NLL DWG 02380006
d. NUSC/NLL DWG 02387001

3.2.2.1 Flexibility. When tested in accordance with 4.5.6, the RF adapter shall exhibit no physical damage as revealed by surface examination and pressure test, and no electrical degradation as revealed by the DC resistance test.

3.2.2.2 Pressure resistance. When tested under hydrostatic pressure in accordance with 4.5.2, the RF adapter shall not show evidence of damage or flooding.

3.2.2.3 Durability. The RF adapter shall withstand the durability test of 4.5.9. The RF adapter shall exhibit no degradation as revealed by the surface examination, DC resistance test, and RF power test.

3.2.2.4 Tensile strength. When tested in accordance with 4.5.8, the RF adapter, with suitable test cables attached, shall withstand static tensile loads along the axis with no evidence of cracking or other damage. The maximum elongation of the housing section, shall not exceed 1.6 percent when subjected to tensile loads as specified in 4.5.8.

3.2.2.5 Diameter. The RF adapter shall have a diameter of 0.650 inches (in.) $\pm$0.020 in.

3.3 Environmental requirements. Environmental requirements shall be as specified in 3.3.1 and 3.3.2.

3.3.1 Nonoperating temperature. The RF adapter shall withstand shipment and storage temperatures over the range -40° Celsius (C) to +70°C with no degradation.

3.3.2 Operating temperature. When tested in accordance with 4.5.7.2, the RF adapter shall operate at -10°C.

3.4 Health and safety. Health and safety considerations require avoidance of toxicological substances, such as encapsulants, adhesives, or preservatives which could contaminate the closed environment of a submarine. Materials specified in NUSC/NLL DWG 02387001 shall be acceptable. Substitutes shall be approved by the Government.

3.5 Workmanship. The RF adapter shall be manufactured with care using the exact materials, dimensions, and surface finishes specified in NUSC/NLL DWG 02387001. Fabrication shall ensure correct arrangement, hookup, and fastening of all components. The molding procedure for the housing is particularly critical and shall be performed with careful attention to spacing, lay, and tension of reinforcing members. The completed assembly shall be clean and free of sand, grit, burrs, cuts, and gouges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall conform to all requirements of Section 3 and Section 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at any time. Verification will consist of, but is not limited to, a) surveillance of the operations to determine that practices, methods, and procedures of the written quality program are being properly applied, b) Government product inspection to measure quality of the product to be offered for acceptance, and c) Government inspection of delivered products to assure compliance with all inspection requirements of this specification. Failure of the contractor to promptly correct deficiencies discovered by him or of which he is notified shall be cause for suspension of acceptance until corrective action has been taken or until conformance of the product to prescribed criteria has been demonstrated.

4.1.3 Quality assurance terms and definitions. Quality assurance terms used in this specification shall be as defined in MIL-STD-109.

4.2 Classification of inspections. The inspection specified herein are classified as specified in a through c:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)
   1. Production inspection (Group A) (see 4.4.1)
   2. Production control inspection (Group B) (see 4.4.2)
c. Inspection of preparation for delivery (see 4.7)

4.3 First article inspection. Unless otherwise specified (see 6.2.1), one unit shall be required for first article inspection. First article inspection shall consist of all examination and testing necessary to determine compliance with the requirements of this specification. First article inspection shall include the tests specified in TABLE II.

TABLE II. Examinations and tests.

Examination or test	Requirement paragraph	Test paragraph	First article inspection	Quality conformance inspection	
				Group A	Group B
DC resistance	3.2.1.1	4.5.1	X	X	
Pressure resistance	3.2.2.2	4.5.2	X	X	
RF power	3.2.1.2	4.5.3	X		X
Physical characteristics	3.2.2	4.5.4	X		X
Diameter	3.2.2.5	4.5.5	X	X	
Flexibility	3.2.2.1	4.5.6	X	X	
Nonoperating temperature	3.3.1	4.5.7.1	X		X
Operating temperature	3.3.2	4.5.7.2	X		X
Tensile strength	3.2.2.4	4.5.8	X		X
Durability	3.2.2.3	4.5.9	X		X
Workmanship	3.5	4.6	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with 4.4.1 through 4.4.2.2.

4.4.1 Production inspection (Group A). Production inspection shall be conducted on each RF adapter offered for delivery. Production inspection shall comprise such examinations and tests which will prove the workmanship and reveal omission and errors of the production process, such as functional and performance tests at a limited number of points in the required range, tests which detect deviations from design, and tests which detect hidden defects of materials. Production inspection shall include the examinations and tests specified in TABLE II, Group A.

4.4.2 Production control inspection (Group B). Production control inspection shall be conducted on a sampling basis as specified in 4.4.2.1. Production control inspection shall consist of examinations and tests which encompass functional and performance tests throughout the entire range of operation, and tests to determine deviations in the processes and equipment required to fabricate the assembly. The tests shall be performed on the complete equipment as offered for delivery. Production control inspection shall include the examinations and tests shown in TABLE II, Group B.

4.4.2.1 Sampling plan for production control inspection. RF adapters submitted for production control sampling tests shall be selected by the Government quality assurance representative (QAR) and shall be representative of current production. One RF adapter shall be selected from each successive 25 production RF adapters, or fraction thereof, produced.

4.4.2.2 Production control sample unit processing. If a sample unit fails the inspection specified in 4.4.2, the contractor shall immediately investigate the cause of failure and shall report to the QAR the results thereof, and details of the corrective action taken to correct units of product which were manufactured under the same conditions, with the same materials, processes, and so forth. No sample shall be delivered as a production item under the contract.

4.5 Test methods. To the extent specified herein, the examinations and tests specified in TABLE II shall be performed in accordance with MIL-E-16400. Testing shall be performed at ambient pressure and room temperature unless otherwise specified.

4.5.1 DC resistance test. The DC resistance (continuity) of the center conductor and the outer conductor and the insulation resistance between center and outer conductors shall be measured on the RF adapter when assembled with test cables as shown in FIGURE 1. The RF adapter shall be tested for continuity using a General Radio Type 1650-A impedance bridge, or equal. Insulation resistance tests shall be performed using a megohmeter (AN/PSM-25, or equal) which applies not more than 500 volts (V) to the circuit under test. The continuity and insulation resistance limits shall be in accordance with TABLE I.

4.5.2 Pressure resistance test. The RF adapter, assembled with test cable and test plug, shall be tested as specified in a through e for watertight integrity using the test setup shown in FIGURE 2:

a. Subject the RF adapter and test plug portion of the test assembly to a hydrostatic pressure of 600 pounds per square inch (psi) as specified in TABLE III with the UG-1820/U connector end of the test cable in air at ambient pressure. The time to reach the required pressure should be the minimum permitted by the equipment.

b. Initially, and at 20 minutes after start of test (or when the pressure vessel has reached the required pressure), measure the insulation resistance using a megohmeter (AN/PSM-25, or equal) that applies no more than 500 V between test points. Measure between the center and outer conductors of the UG-1820/U connector (see FIGURE 2). The insulation resistance readings shall be in accordance with TABLE I.

c. Remove the RF adapter and test plug portion of the test assembly from the pressure vessel and dry off the water on the surface of the cable, RF adapter, and test plug.

d. Disassemble the adapter and visually inspect the interior components for evidence of leakage or damage.

e. Assemble the RF adapter with the test cables as shown in FIGURE 1. Perform the DC resistance test of 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

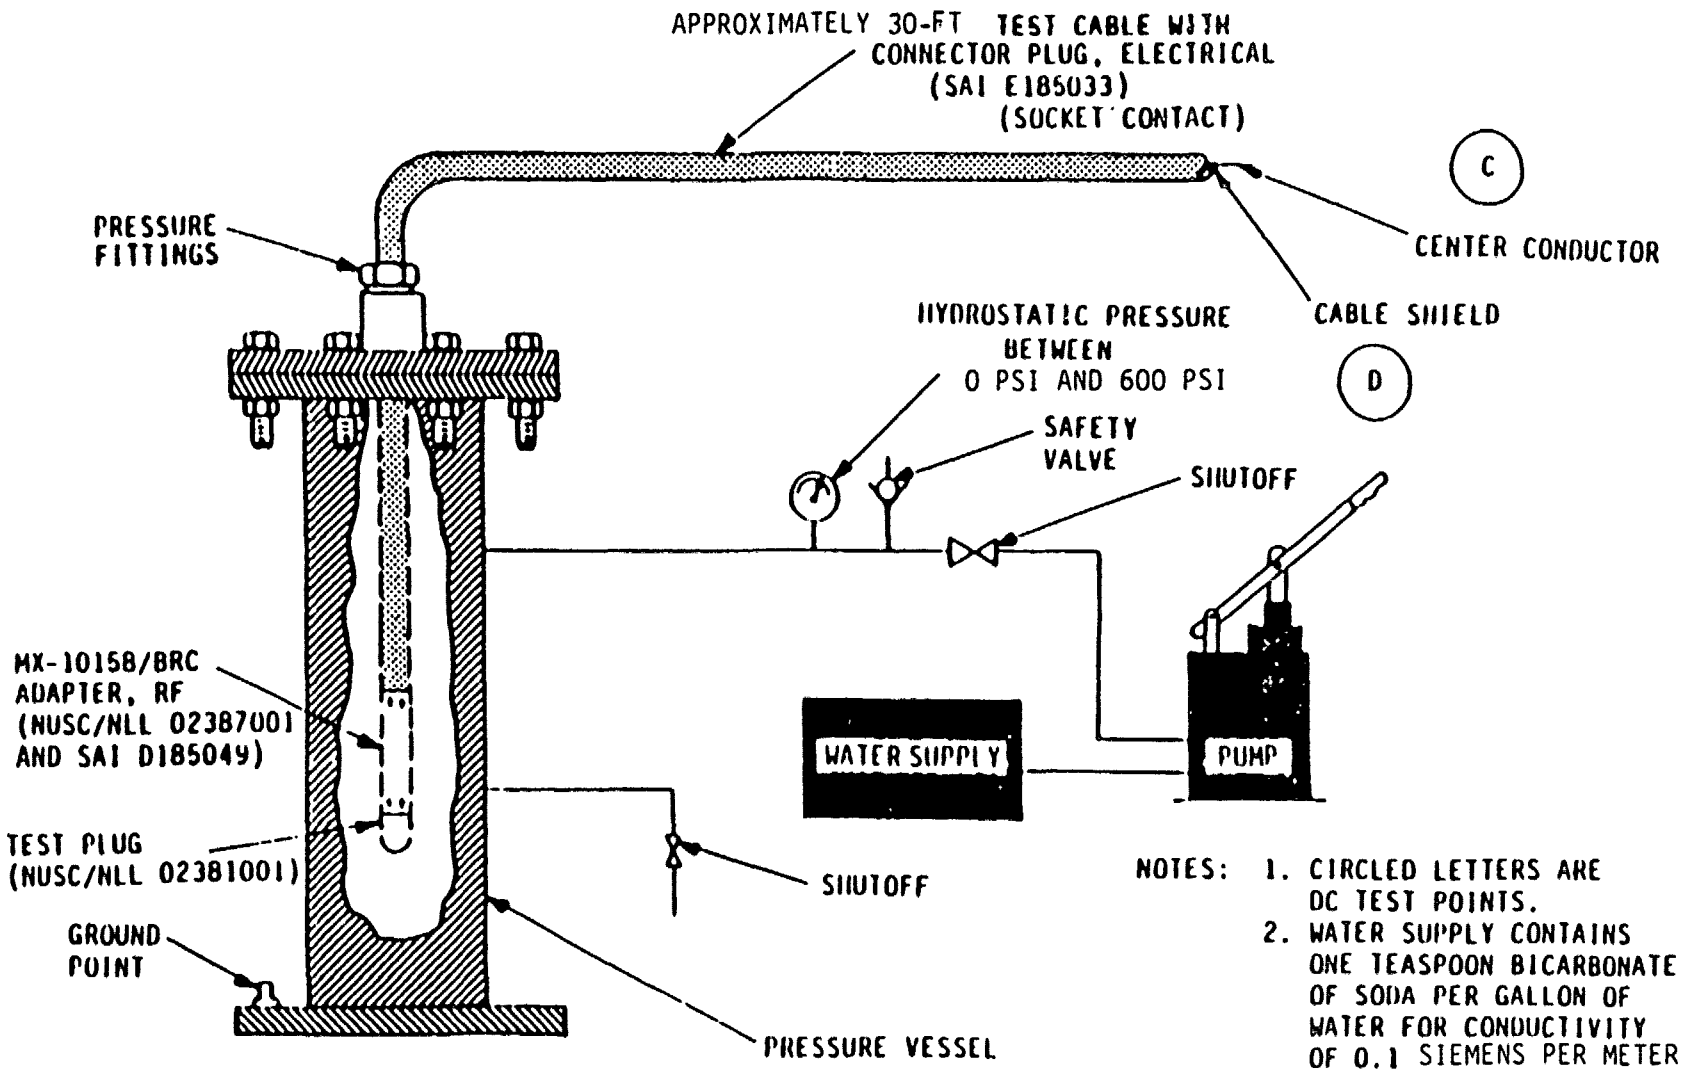


FIGURE 2. Pressure resistance test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

TABLE III. Pressure resistance test requirements.

First article			Production	
Pressure (psig)[1/]	Duration (minutes)		Pressure (psig)	Duration (minutes)
0	5		0	5
600	25		600	25
0	5		0	5
600	25		600	25
0	5		0	5
600	25		600	25
0	5		0	5
600	20 hours		600	25
0	5		0	5
600	25		600	25
0	5		0	5
600	25		600	25
0	5		0	5
			600	25
			0	5
			600	25
			0	5

[1/] pound-force per square inch gage

4.5.3 RF power test. The RF adapter, using the test setup shown in FIGURE 3, shall be tested by applying 1000 W of CW RF power. RF power shall be applied through the RF adapter (end marked with CA) for 5 minutes over a frequency range of 2 MHz to 30 MHz. After completion of the RF power test, perform the DC resistance test of 4.5.1. The RF adapter shall be disassembled and inspected for damage in accordance with MIL-E-16400.

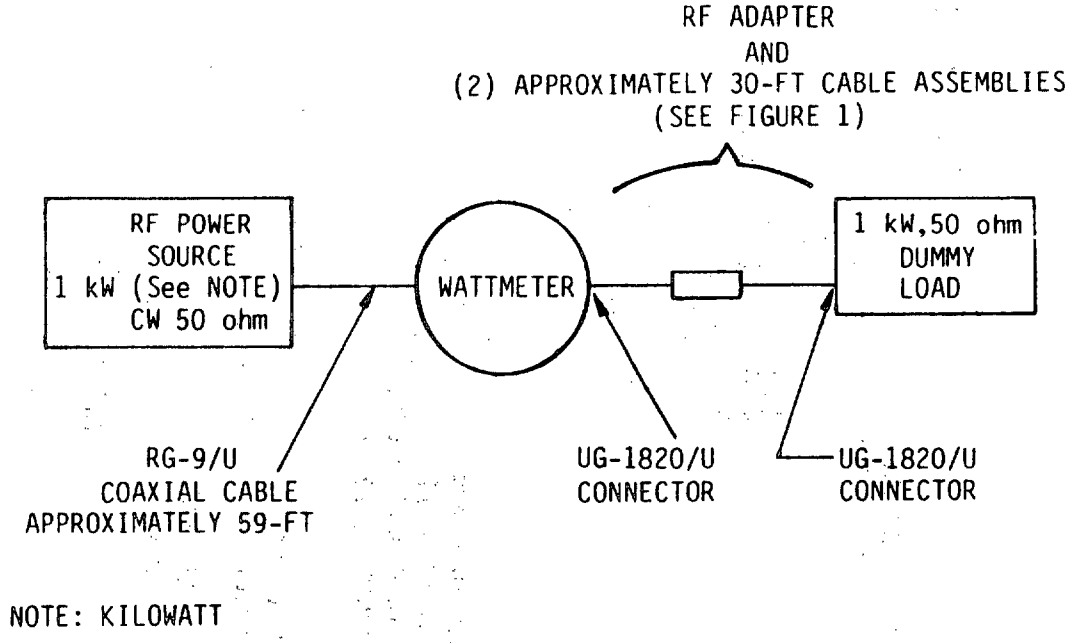



FIGURE 3. RF power test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.5.4 Surface examination. Surface examination shall be performed in accordance with MIL-E-16400. Conformance to the requirements of 3.2.2 shall be verified during the surface examination. Radiographic inspection shall be conducted on the first article and on every consecutive fifteenth RF cable adapter housing section to verify correct internal spacing and lay of reinforcing members and the absence of flaws.

4.5.5 Diameter test. The RF adapter shall be passed through a sizing block having a hole diameter of 0.670 in. to 0.671 in. maximum.

4.5.6 Flexibility test. The RF adapter, assembled with test cables as shown in FIGURE 1, shall be flexed through an S-bend path test device made in accordance with FIGURE 4, three times in each direction, at 60 ft per minute. The continuity of the center conductor and the outer conductor of the RF adapter with test cables shall be monitored continuously during the test. The surface examination of 4.5.4 shall be performed. The continuity resistance limits shall be in accordance with TABLE I.

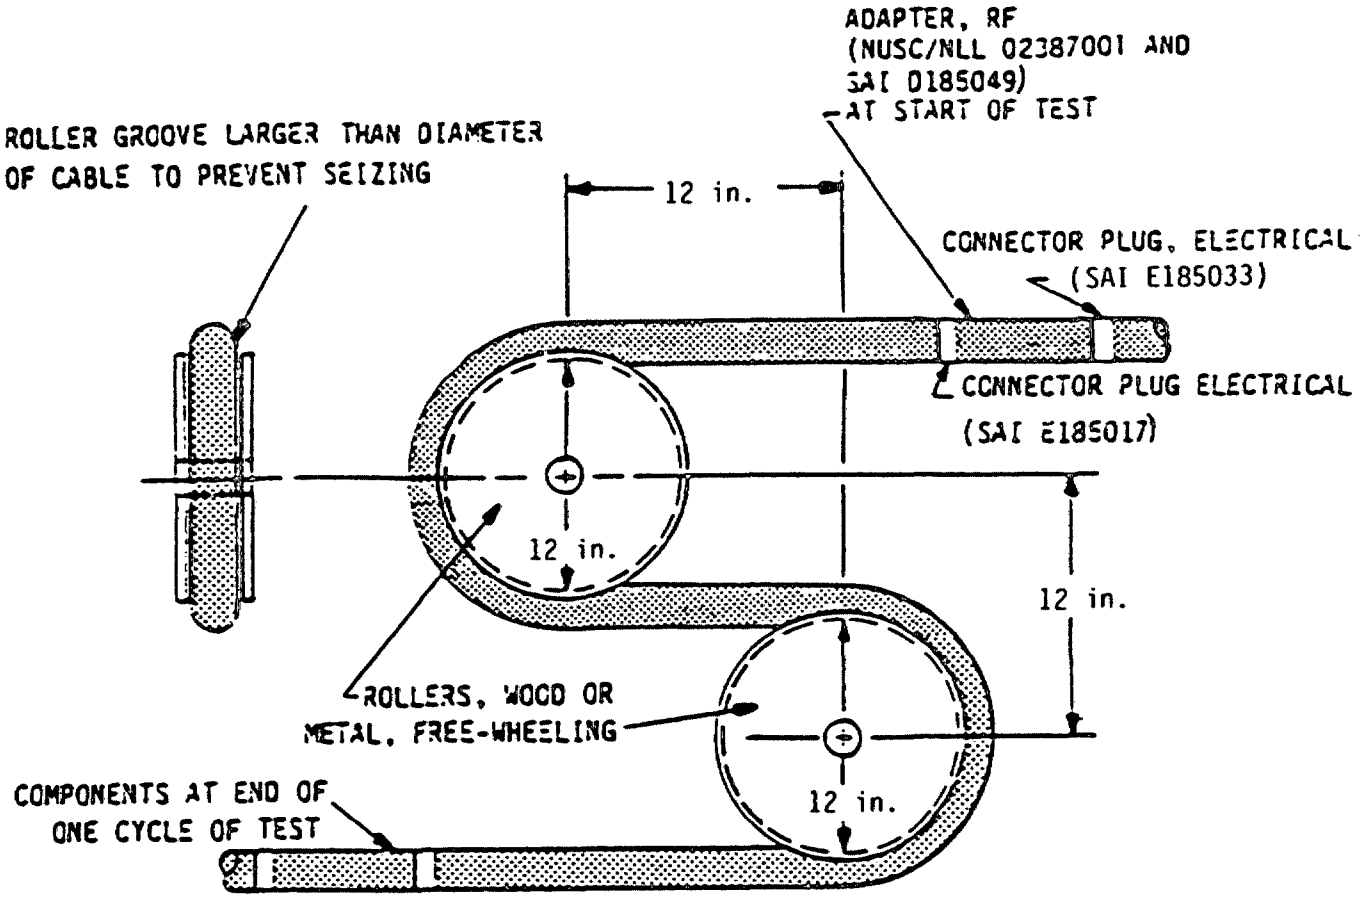

NOTE: Use sufficient tension to bend adapter housing into close contact with rollers. Ensure contact through at least 180 degrees on each roller. Do not pull on the UG-1820/U end connectors to perform the test.

FIGURE 4. Flexibility test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.5.7 Temperature test. The temperature test shall be in accordance with 4.5.7.1 and 4.5.7.2.

4.5.7.1 Nonoperating temperature. The RF adapter, assembled with test cables as shown in FIGURE 1, shall be formed into a coil with a maximum diameter of 22 in. The coil shall be placed in an environmental chamber and conditioned for 8 hours at -40°C. The temperature shall be increased at a rate of 10°C per hour until the chamber reaches a temperature of +70°C. The temperature of the environmental chamber shall be held at 70°C for 8 hours. The RF adapter and test cable assembly shall then be removed and inspected for damage. The RF adapter shall show no evidence of cracking or other damage. Acceptable RF adapter performance shall be verified by conducting the flexibility test of 4.5.6 at room temperature.

4.5.7.2 Operating temperature. The RF adapter, assembled with test cables as shown in FIGURE 1, shall be formed into a coil not over 36 in. in diameter. The coil shall be placed in an environmental chamber and conditioned for 12 hours at -10°C. While still in the environmental chamber at -10°C, the RF adapter with test cables, shall be flexed through an S-bend path, as shown in FIGURE 4, three times in each direction, at 60 ft per minute. Electrical continuity of the RF adapter with test cables shall be monitored during the test. The continuity resistance limits shall be as specified in TABLE I. Acceptable RF adapter performance shall be verified by inspecting the RF adapter for evidence of damage.

4.5.8 Tensile test. The tensile strength of the RF adapter shall be tested by subjecting the RF adapter to a static tensile load along the axis in accordance with TABLE IV. The test setup shall be similiar to the setup shown in FIGURE 5. The length of the RF adapter housing shall be measured under load at the beginning (initial 10-pound (lb) tensile load) and at the 500-lb tensile loads during the fourth cycle. The elongation shall comply with the requirements of 3.2.2.4. The RF adapter shall be examined for evidence of cracking or other damage. The flexibility test of 4.5.6 shall be performed.

TABLE IV. Tensile load test requirements.

Connector plug (pin contact)	
Tensile (lbs)	Duration (minutes)
10	Time required to perform reference measurement
400	55
10	5
400	55
10	5
400	55
10	5
400	55
10	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

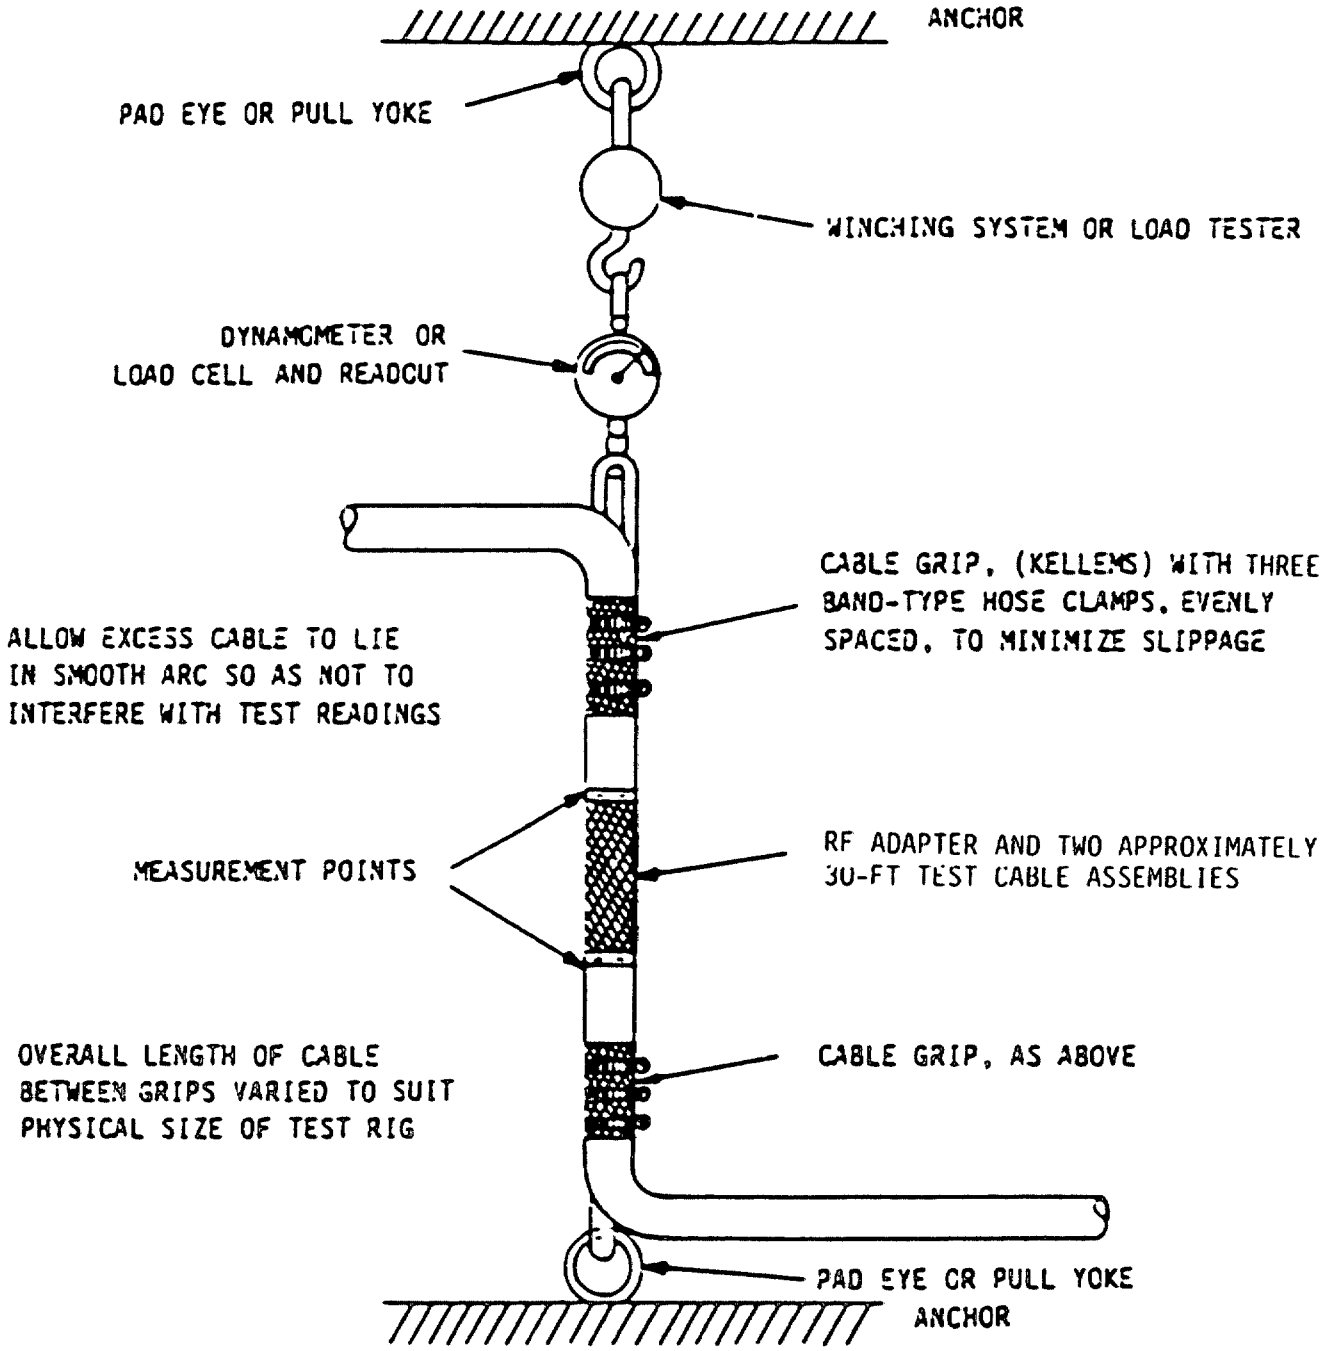


FIGURE 5. Tensile test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.5.9 Durability test. The element, assembled with test cables, shall be drawn 25 times in each direction through the Antenna Transfer Assembly, AN/BRA-24( ), using the test setup shown in FIGURE 6. The transfer assembly shall contain water at a hydrostatic pressure of 50 psig to 120 psig. The continuity of the RF adapter and test assembly shall be monitored continuously and any variation in resistance shall be noted. The DC resistance limits are 0.67 ohm to 0.70 ohm between center and outer conductor of the UG-1820/U connector. After completion of passage through the AN/BRA-24( ), the RF power test shall be performed in accordance with 4.5.3. The RF adapter shall be disassembled and visually inspected in accordance with MIL-E-16400.

4.6 Workmanship. The RF adapter shall be examined to determine conformance to the surface examination requirements of 3.5 and the Workmanship paragraph of MIL-E-16400.

4.7 Inspection of preparation for delivery. Inspection shall be performed to ensure conformance with the requirements of Section 5.

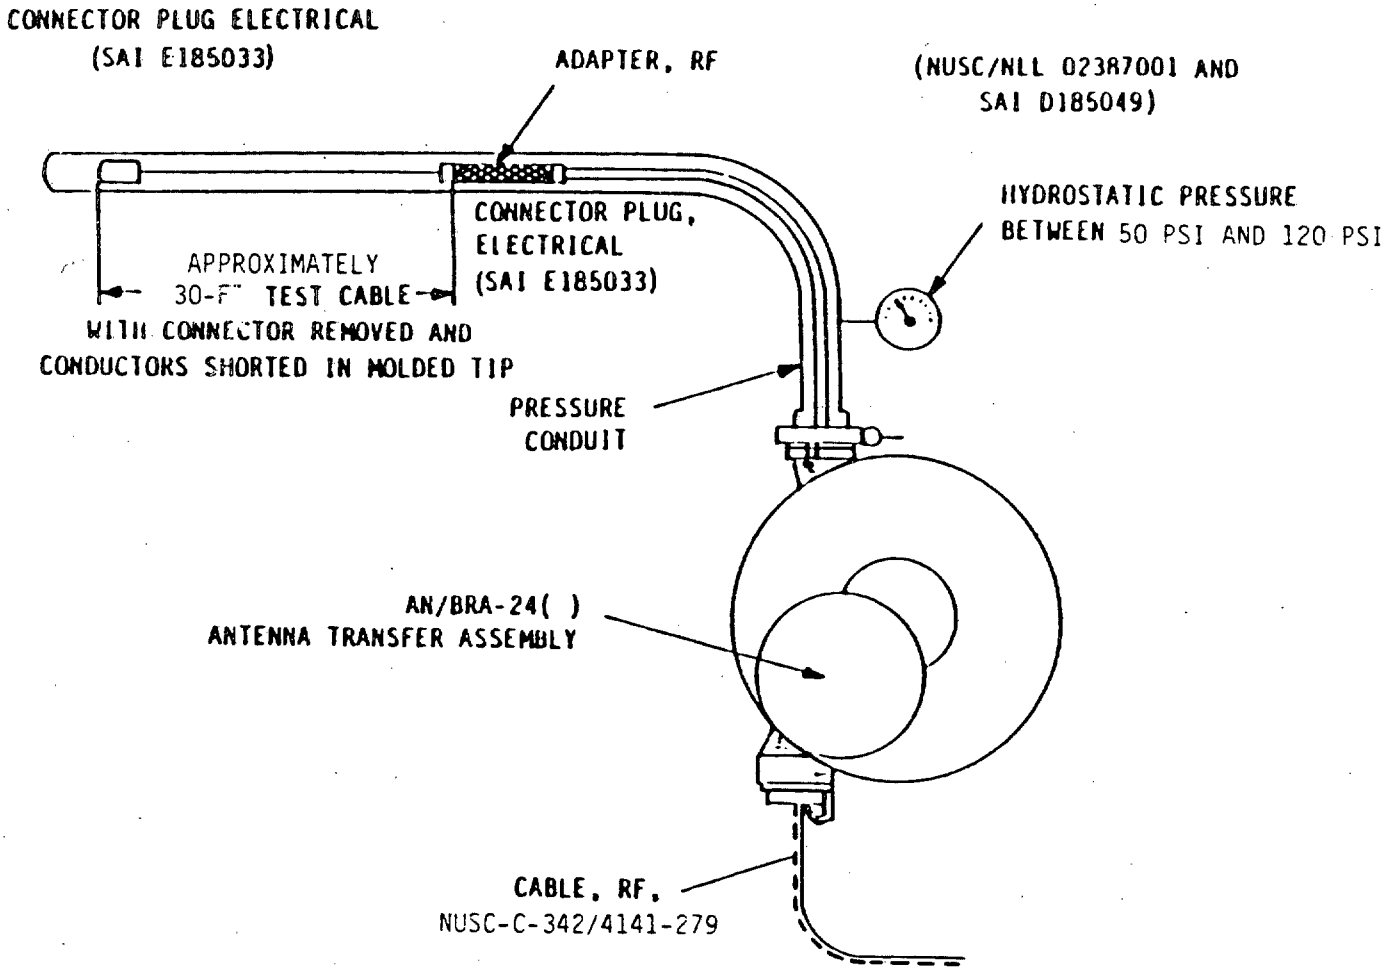


FIGURE 6. AN/BRA-24( ) Durability test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

5. PACKAGING

(The preparation for delivery requirements specified herein apply only for direct Government procurements. Preparation for delivery requirements of referenced documents listed in Section 2 do not apply unless specifically stated in the contract. Preparation for delivery requirements for products procured by contractors shall be specified in the individual order.)

5.1 Preservation, packaging, packing, and marking. The RF adapter shall be sealed with plastic caps (Clover Part No. EE-101, NAS-813-10, or equivalent) and protected with a suitable cushioning material. A copy of the assembly instructions, NUSC/NLL DWG 02380006, shall be packaged with each RF adapter in a plastic bag together with required screws and 50 percent spare screws. The RF adapter shall be packaged in a box conforming to V3 of PPP-B-636 with additional packing to afford protection against physical damage during shipment, handling, and covered storage. The top and bottom flaps of the box shall be sealed with 2 in. wide tape conforming to PPP-T-60, Type IV. The box dimensions shall not exceed 12 in. in length, 4 in. in width, and 4 in. in depth.

6. NOTES

6.1 Intended use. The RF adapter covered by this specification is intended for use by submarines as part of Buoyant Cable Antenna Assembly, AS-3434(V)/BRC.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition requirements should specify:

a. Title, number, and date of this specification
b. Number of first article samples to be submitted if other than specified in 4.3

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List, incorporated into the contract. When the provisions of DoD Federal Acquisition Regulations Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs:

Paragraph	Data requirement	Applicable DID
4.3	First Article Inspection Procedure	DI-T-4901
4.3	First Article Inspection Report	DI-T-4902

(DIDs related to this specification, and identified in Section 6 will be approved and listed as such in DoD 5000.19L, Vol. II, AMSDL. Copies of DIDs required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Supersession data. This specification includes the requirements of ELEX-C-527, dated 18 August 1982.

Preparing activity:
NAVY - EC

(Project No. 5985-N525-4(EC))

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-28898	Adapter, Radio Frequency, MX-10158/BRC

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.