MILITARY SPECIFICATION

CABLE ASSEMBLIES, RF, CG-3820/BRC, CG-3819/BRC

This specification is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance, design, manufacture, test, and acceptance of the radio frequency (RF) Cable Assemblies, CG-3820/BRC and CG-3819/BRC, hereinafter referred to as RF cable assemblies.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standard(s). The following specifications and standard(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-S-760	Strapping, Nonmetallic (And Connectors)

MILITARY

MIL-C-12000	Cable Cord And Wire Electric, Packaging Of
MIL-E-16400	Electronic, Interior Communication And Navigation Equipment, Naval Ship And Shore: General Specification For

NAVAL UNDERWATER SYSTEMS CENTER (NUSC), NEW LONDON LABORATORY (NLL)

NUSC-C-342/4141-279	Cable, Radio Frequency, Buoyant, General Specification

STANDARDS

MILITARY

MIL-STD-109	Quality Assurance Terms And Definitions

2.1.2 Other Government drawings (DWGs). The following other Government DWGs form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Space and Naval Warfare Systems Command (SPAWAR-8111), Washington, DC 20363-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

DWGs

NUSC

NUSC/NLL 02378001	Cable Assembly, RF CG-3819/BRC And CG-3820/BRC (For Use With CG-3819/BRC Only)
NUSC/NLL 02379005	Pin Contact
NUSC/NLL 02387001	Adapter, Radio Frequency, MX-10158/BRC
RE D 49485	Connector, UG-1820/U

(Copies of specifications, standards, and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

SPEARS ASSOCIATES, INCORPORATED (SAI)

SAI D185015	Cover, TEST/SHIPPING
SAI D185049	Housing Assembly
SAI D211052	Connector, Plug, Electrical Assembly (Buoyant Cable)
SAI E185033	Connector, Plug, Electrical (Socket Contact) Cable Assembly
SAI E211026	RF Cable Assembly, CG-3820/BRC

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The RF cable assemblies shall be in accordance with MIL-E-16400, to the extent specified herein.

3.1.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.1.2 Description. The RF cable assemblies each shall consist of coaxial buoyant cable with length and terminations as specified.

3.1.3 RF Cable Assembly, CG-3820/BRC. This cable assembly shall consist of an assembly of components as shown in FIGURE 1.


3.1.4 RF Cable Assembly, CG-3819/BRC. This RF cable assembly shall consist of components as shown in FIGURE 2.

3.2 Characteristics. RF cable assembly characteristics shall be as specified in 3.2.1 through 3.2.2.6.

3.2.1 Performance. RF cable assembly performance characteristics shall be as specified in 3.2.1.1 and 3.2.1.2.

3.2.1.1 RF cable assemblies. The RF cable assemblies function as transmission lines to convey very low frequency (VLF) and low frequency (LF) and medium frequency (MF) and high frequency (HF) received signals (CG-3820/BRC) and VLF through very high frequency (VHF) (CG-3819/BRC) between an antenna element on the surface of the sea and a submerged submarine. The RF cable assemblies shall interface with RF Adapter, MX-10158/BRC and RF Amplifier, AM-7074/BRC of Antenna Group, AS-3434(V)/BRC. The RF cable assemblies shall be mechanically compatible with deployment and retrieval through antenna transfer assemblies, AN/BRA-18( ) and AN/BRA-24( ).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

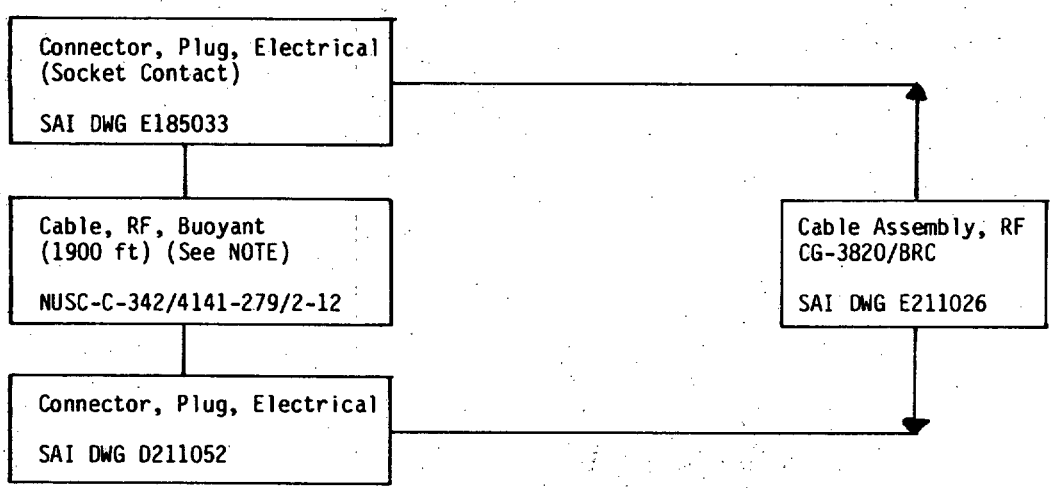

NOTE: Feet

FIGURE 1. Components of Cable Assembly, CG-3820/BRC.

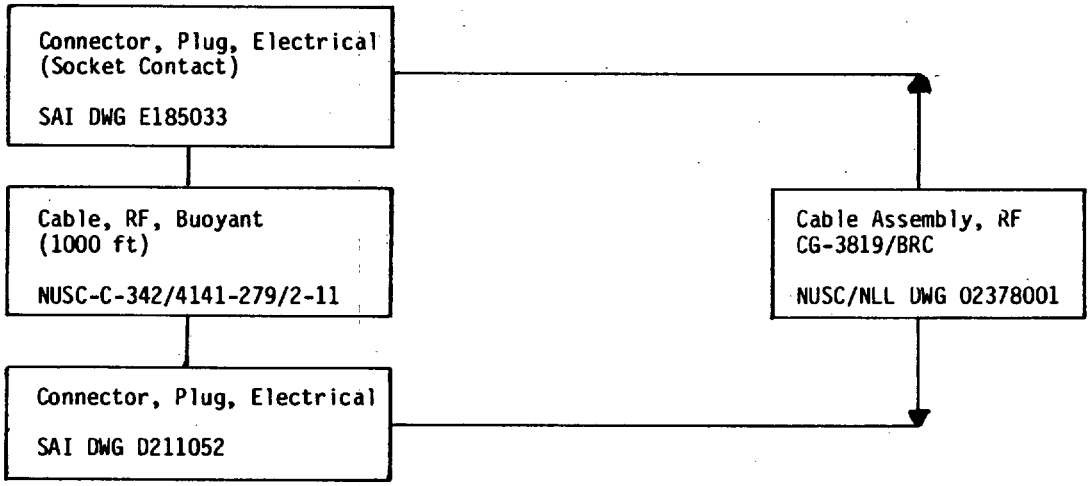


FIGURE 2. Components of Cable Assembly, CG-3819/BRC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

3.2.1.2 Direct current (DC) resistance. When tested in accordance with 4.5.1, the RF cable assemblies shall conform to the continuity and insulation resistance limits specified in TABLE I.

TABLE I. RF cable assemblies DC resistance requirements.

Measurement points (see FIGURE 3 and FIGURE 4)	DC resistance	
	CG-3820/BRC	CG-3819/BRC
A and B (continuity)	Less than 0.62 ohms/100 ft	Less than 0.41 ohms/100 ft
B and D (continuity)	Less than 0.70 ohms/100 ft	Less than 0.67 ohms/10 ft
C and D (insulation)	Greater than 1000 megohms	Greater than 1000 megohms

3.2.2 Physical characteristics. The RF cable assemblies shall be fabricated in accordance with this specification, SAI DWG E211026 and NUSC/NLL DWG 02378001.

3.2.2.1 Flexibility. When tested in accordance with 4.5.7, the RF cable assemblies shall exhibit no physical damage as revealed by surface examination (see 4.5.3) and no electrical degradation as revealed by the DC resistance test (see 4.5.1).

3.2.2.2 Pressure resistance. When tested under hydrostatic pressure in accordance with 4.5.2, the RF cable assemblies shall show no evidence of damage or flooding.

3.2.2.3 Durability. The RF cable assemblies shall withstand the AN/BRA-24( ) durability test of 4.5.10. The RF cable assemblies shall exhibit no degradation as revealed by the surface examination specified in 4.5.3.

3.2.2.4 Tensile strength. When tested in accordance with 4.5.9, the molded connector plug (socket contact), with suitable test fixtures attached, shall withstand static tensile loads along its axis with no evidence of cracking or other damage. The maximum elongation of the molded section, including the separation of connector (metal section) from the buoyant cable, shall not exceed 2 percent when subjected to tensile loads as specified in 4.5.9.

3.2.2.5 Diameter. The outer diameter of any point along the complete RF cable assemblies, including the molded connector plug but excluding the inboard connector, shall be 0.650 inches (in.) ±0.020 in.

3.2.2.6 Length. Unless otherwise specified (see 6.2.1), the overall length of the RF cable assemblies shall be 1900 ft ±25 ft and 1000 ft ±25 ft, respectively. The RF cable assemblies shall be continuous without joints or splices.

3.3 Environmental requirements. Environmental requirements shall be as specified in 3.3.1 and 3.3.2.


3.3.1 Nonoperating temperature. The RF cable assemblies shall withstand shipment and storage temperatures over the range -40° Celsius (C) to +70°C.

3.3.2 Operating temperature. When tested in accordance with 4.5.8.2, the RF cable assemblies shall operate at a temperature of -10°C.

3.4 Marking. The RF cable assemblies shall conform to the marking and identification requirements of DWGs, parts list, specifications, and other documents listed in NUSC/NLL DWG 02378001 and SAI DWG E211026.

3.5 Health and safety. Health and safety considerations require avoidance of toxicological substances such as encapsulants, adhesives, or preservatives which could contaminate the closed environment of a submarine. Materials specified in NUSC/NLL DWG 02378001 and SAI DWG E211026 shall be acceptable. Substitutes shall be approved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

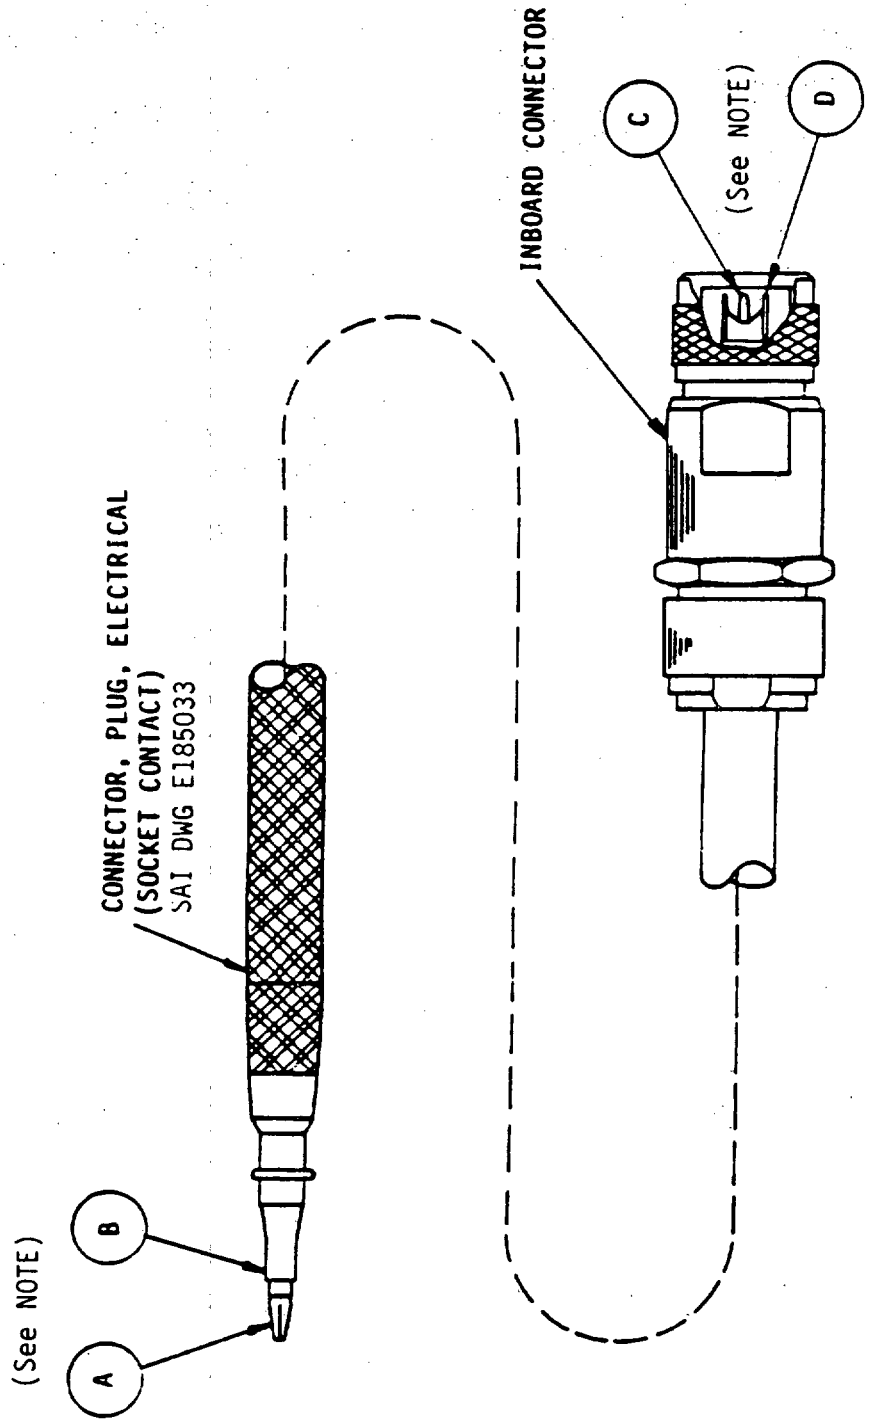

NOTE: 1. Measurement point for antenna element DC resistance.

FIGURE 3. DC resistance test points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

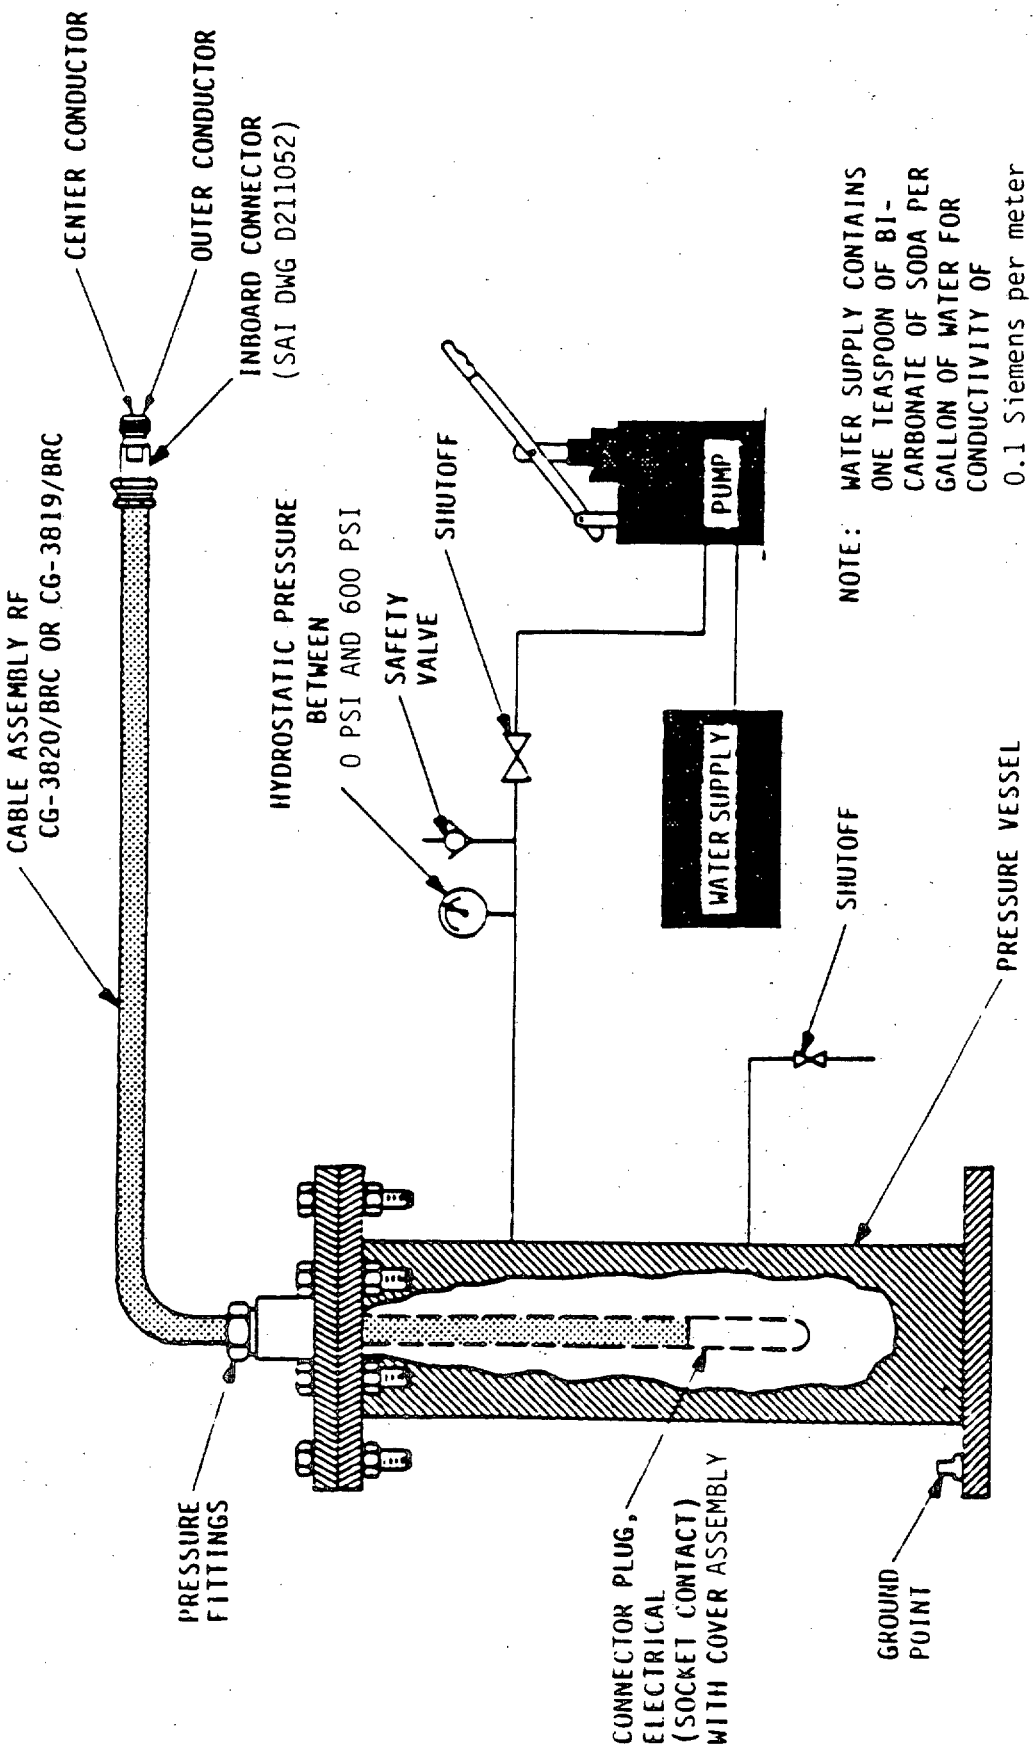


FIGURE 4. Pressure resistance test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The RF cable assemblies shall be manufactured with care using the materials, dimensions, and surface finishes specified in NUSC/NLL DWG 02378001 and SAI DWG E211026. Assembly shall ensure correct arrangement, hookup, and fastening of all components. The molding procedure for the connector, plug, electrical (socket contact) is particularly critical and shall be performed under controlled time and temperature conditions. The completed assembly shall be clean and free of sand, grit, burrs, cuts, and gouges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall conform to all requirements of Section 3 and Section 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsiblity of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at any time. Verification will consist of, but is not limited to, a) surveillance of the operations to determine that practices, methods, and procedures of the written quality program are being properly applied, b) Government product inspection to measure quality of the product to be offered for acceptance, and c) Government inspection of delivered products to assure compliance with all inspection requirements of this specification. Failure of the contractor to promptly correct deficiencies discovered by him or of which he is notified shall be cause for suspension of acceptance until corrective action has been taken or until conformance of the product to prescribed criteria has been demonstrated.

4.1.3 Quality assurance terms and definitions. Quality assurance terms used in this specification shall be as defined in MIL-STD-109.

4.2 Classification of inspections. The inspection requirements specified herein are classified as specified in a through c:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)
   1. Production inspection (Group A) (see 4.4.1)
   2. Production control inspection (Group B) (see 4.4.2)
c. Inspection of preparation for delivery (see 4.7)

4.3 First article inspection. Unless otherwise specified (see 6.2.1), one unit shall be required for first article inspection. First article inspection shall consist of all examination and testing necessary to determine compliance with the requirements of this specification. First article inspection shall include the tests specified in TABLE II.

4.4 Quality conformance inspection. Quality conformance inspection shall be as specified in 4.4.1 through 4.4.2.2.

4.4.1 Production inspection (Group A). Production inspection shall be conducted on each RF cable assembly offered for delivery. Production inspection shall comprise such examinations and tests which will prove the workmanship and reveal omissions and errors of the production process such as functional and performance tests at a limited number of points in the required range, tests which detect deviations from design, and tests which detect hidden defects of materials. Production inspection shall include the examinations and tests specified in TABLE II, Group A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

TABLE II. Examinations and tests.

Examination or test	Requirement paragraph	Test paragraph	First article inspection	Quality conformance inspection	
				Group A	Group B
DC resistance	3.2.1.2	4.5.1	X	X	
Pressure resistance	3.2.2.2	4.5.2	X	X	
Physical characteristics	3.2.2	4.5.3	X	X	
Marking	3.4	4.5.4	X	X	
Diameter	3.2.2.5	4.5.5	X	X	
Length	3.2.2.6	4.5.6	X	X	
Flexibility	3.2.2.1	4.5.7	X	X	
Nonoperating temperature	3.3.1	4.5.8.1	X		X
Operating temperature	3.3.2	4.5.8.2	X		X
Tensile strength	3.2.2.4	4.5.9	X		X
Durability	3.2.2.3	4.5.10	X		
Workmanship	3.6	4.6	X	X	

4.4.2 Production control inspection (Group B). Production control inspection shall be conducted on a sampling basis as specified in 4.4.2.1. Production control inspection shall consist of examinations and tests which encompass functional and performance tests throughout the entire range of operations and tests to determine deviations in the processes and equipment required to fabricate the RF cable assemblies. The tests shall be performed on the complete equipment as offered for delivery. Production control inspection shall include the examinations and tests specified in TABLE II, Group B.

4.4.2.1 Sampling plan for production control inspection. Equipment submitted for production control sampling tests shall be selected by the Government Quality Assurance Representative (QAR) and shall be representative of current production. One RF cable assembly shall be selected from each successive 50 production RF cable assemblies (CG-3820/BRC or CG-3819/BRC), or fraction thereof.

4.4.2.2 Nonconforming production control sample units. If a sample unit fails the inspection specified in 4.4.2, the contractor shall immediately investigate the cause of failure and shall report to the QAR the results thereof and details of the corrective action taken to correct units of product which were manufactured under the same conditions, with the same materials, processes, and so forth. No sample shall be delivered as a production item under the contract.

4.5 Test methods. To the extent specified herein, the examinations and tests specified in TABLE II shall be performed in accordance with the test methods specified in MIL-E-16400. Testing shall be performed at ambient pressure and room temperature unless otherwise specified herein.

4.5.1 DC resistance test. The RF cable assemblies, as shown in FIGURE 3, shall be tested for continuity using a General Radio, Type 1650-A impedance bridge, or equal. Insulation resistance readings shall be performed using a megohmeter (AN/PSM-25, or equal) which applies not more than 500 volts (V) to the circuit under test. The continuity and insulation resistance limits shall be in accordance with TABLE I.

4.5.2 Pressure resistance test. The RF cable assemblies shall be tested for watertight integrity, using the test setup shown in FIGURE 4, as specified in a through e:

a. Place the cover made in accordance with SAI DWG D185015 over the connector plug (socket contact), SAI DWG E185033 portion of the RF cable assemblies.

b. Subject the connector plug (socket contact) and cover to hydrostatic pressure as specified in TABLE III with the inboard connector end of the RF cable assemblies in air at ambient pressure. The time to reach the required pressure shall be the minimum permitted by the equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

c. At the end of each pressure test interval, measure the insulation resistance using a megohmeter (AN/PSM-25, or equal) that applies no more than 500 V between test points. Measure between the center conductor and outer conductor of the inboard connector (test points C and D in FIGURE 3). The insulation resistance readings shall be in accordance with TABLE I.

d. Remove the connector plug (socket contact) and cover from the pressure vessel and dry off water on the surface of the cable, connector, and cover.

e. Perform the surface examination in accordance with 4.5.3. Leave the cover in place on the connector plug for protection during shipment (see 5.1).

TABLE III. Pressure resistance test requirements.

First article inspection		Production inspection	
Pressure (psig) 1/	Duration (minutes)	Pressure (psig)	Duration (minutes)
0	5	0	5
600	25	600	25
0	5	0	5
600	25	600	25
0	5	0	5
600	25	600	25
0	5	0	5
600	20 hours	600	25
0	5	0	5
600	25	600	25
0	5	0	5
600	25	600	25
0	5	0	5
		600	25
		0	5
		600	25
		0	5

1/ pound-force per square inch gage

4.5.3 Surface examination. Surface examination shall be performed in accordance with MIL-E-16400. Conformance to the requirements of 3.2.2 and 3.6 shall be verified during this examination.

4.5.4 Marking examination. The marking examination shall consist of verifying that the position marks and identification letters are legible at a distance of 3 ft and that these marks and letters are an integral part of the RF cable assemblies in accordance with 3.4.


4.5.5 Diameter test. The entire length of RF cable assemblies, including the connector plug (socket contact) but excluding the inboard connector, shall be passed through a sizing block having a hole diameter of 0.670 in. to 0.671 in. to verify conformance to 3.2.5.5. This test may be run concurrently with the length test of 4.5.6.

4.5.6 Length test. The length of RF cable assemblies shall be measured by a cable counter or other suitable device.

4.5.7 Flexibility test. The connector plug (socket contact) of the RF cable assemblies, when assembled with mating component, RF Adapter, MX-10158/BRC, and test cable including connector plug (pin contact), shall be flexed through an S-bend path test device made in accordance with FIGURE 5, three times in each direction, at 60 ft per minute. The RF adapter and test cable assembly should be attached to the antenna element as shown in FIGURE 6 to facilitate testing. The electrical continuity shall be monitored continuously during the test.

4.5.8 Temperature test. The temperature test shall be as specified in 4.5.8.1 and 4.5.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

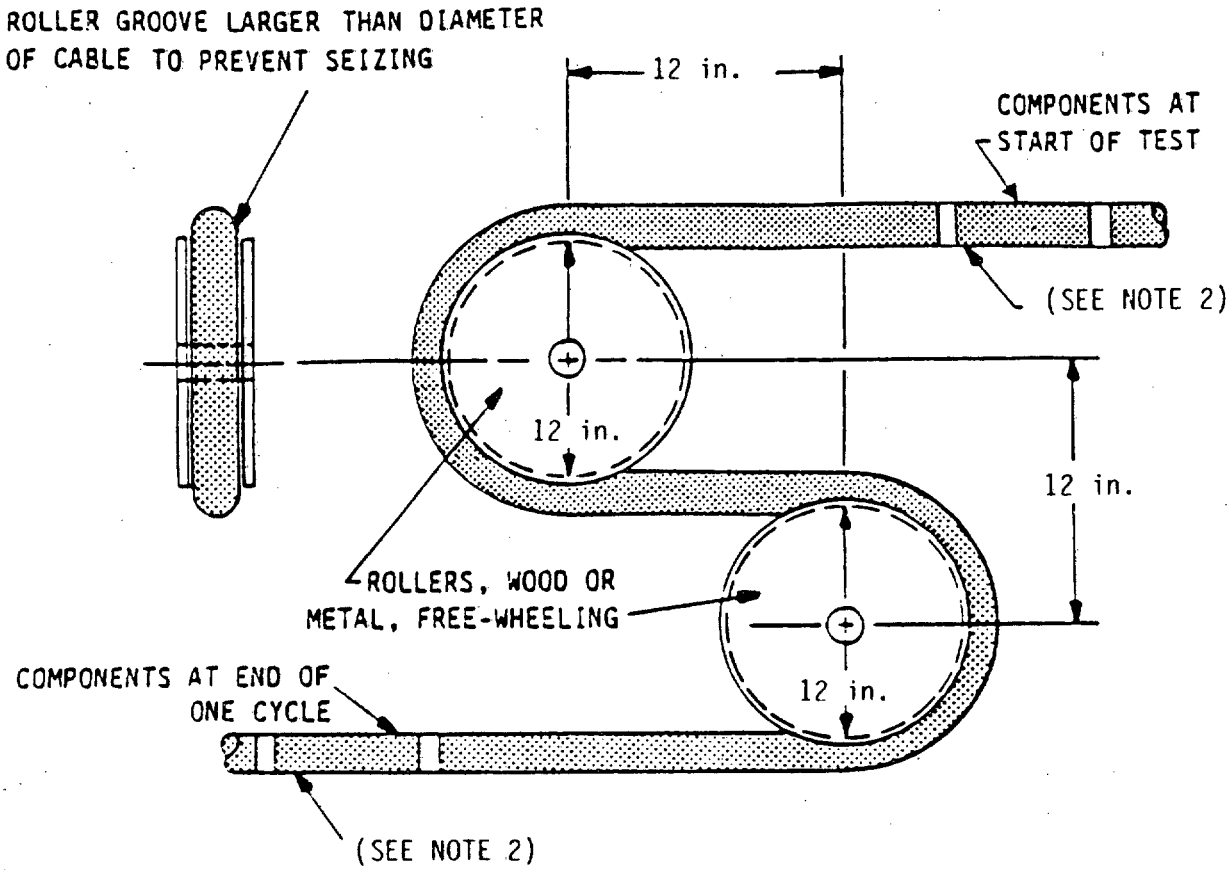

NOTES: 1. Use sufficient tension to bend the RF cable assemblies into close contact with rollers. Ensure that connector plug, electrical (socket contact) is held against rollers, making contact through at least 180 degrees of each roller

2. The adapter and test cable assembly shown on this figure should be attached to the cable assembly to facilitate testing.

FIGURE 5. Flexibility test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.5.8.1 Nonoperating temperature. The RF cable assemblies shall be formed into a coil having a maximum outside diameter of 36 in. minimum, inside diameter of 15 in., and width less than 26 in. The RF cable assemblies shall then be placed in an environmental chamber and conditioned for 8 hours at -40°C. The temperature shall be increased at a rate of 10°C per hour until the chamber reaches a temperature of +70°C. The temperature shall be held at 70°C for 8 hours and then the RF cable assemblies shall be removed and inspected for damage. The RF cable assemblies shall show no evidence of cracking or other damage. Acceptable RF cable assembly performance shall be verified by conducting the DC resistance test of 4.5.1.

4.5.8.2 Operating temperature. The RF cable assemblies, formed into a coil not over 36 in. in diameter or on a reel as specified in 5.1, shall be conditioned in an environmental chamber for 12 hours at -10°C and while still in the environmental chamber at -10°C, the connector plug (socket contact) portion shall be flexed through an S-bend path using the test setup shown in FIGURE 6, three times in each direction at 60 ft per minute. The electrical continuity shall be monitored continuously during the test. The connector plug shall be assembled with RF Adapter, MX-10158/BRC and the test cable as shown in FIGURE 6 for this test. Acceptable RF cable assembly performance shall be verified by inspecting the assembly for evidence of damage and by conducting the DC resistance test of 4.5.1.

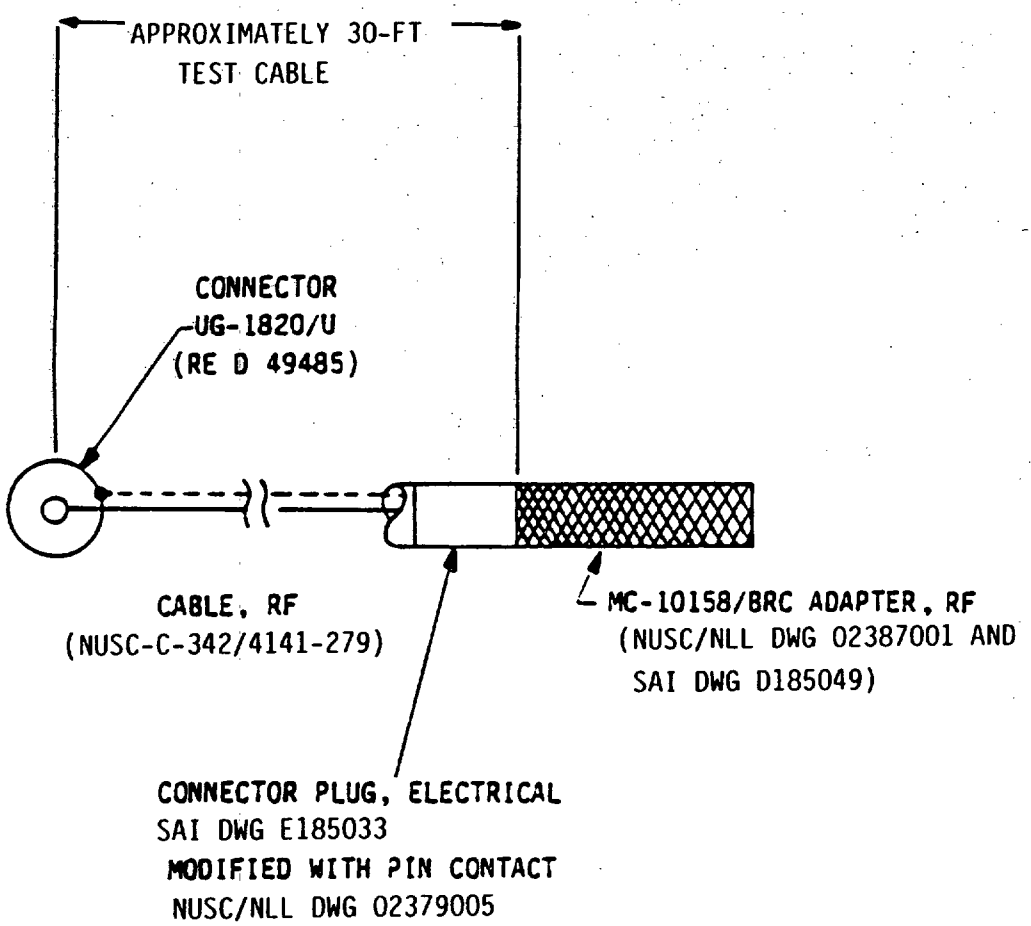


FIGURE 6. RF Adapter, MX-10158/BRC and test cable assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

4.5.9 Tensile test. The tensile strength of the molded connector plug (socket contact) of the RF cable assemblies shall be tested by subjecting the assemblies to static tensile loads along the axis in accordance with TABLE IV. The test setup shall be similar to the test setup shown in FIGURE 7. The distance between point A (interface between metal part of connector plug and molded section of cable) and measurement point B (6 in. from point A) shall be measured under load at the beginning (initial 10-pound (lb) tensile load) and at the 400-lb tensile load during the fourth cycle. The elongation shall comply with the requirements of 3.2.2.4. The test sample shall be examined for evidence of cracking or other damage.

TABLE IV. Tensile load test.

Connector plug (socket contact)	
Tensile load (lbs)	Duration (minutes)
10	Time required to perform reference measurement
400	55
10	5
400	55
10	5
400	55
10	5
400	55
10	5

4.5.10 AN/BRA-24( ) durability test. The RF cable assemblies shall be drawn 25 times in each direction through the antenna transfer assembly, AN/BRA-24( ), using the test setup shown in FIGURE 8. The transfer assembly shall contain water at a hydrostatic pressure of 50 psig to 120 psig. After completion of passage through the AN/BRA-24( ) for 25 cycles, a surface examination shall be performed in accordance with 4.5.3, the DC resistance test shall be performed in accordance with 4.5.1, and the marking examination shall be performed in accordance with 4.5.4.

4.6 Workmanship. The RF cable assemblies shall be examined for workmanship to determine conformance to the surface examination requirements of 3.2.2 and 3.6, and the Workmanship paragraph of MIL-E-16400.

4.7 Inspection of preparation for delivery. Inspection shall be performed to ensure conformance with the requirements of Section 5.

5. PACKAGING

(The preparation for delivery requirements specified herein apply only for direct Government procurements. Preparation for delivery requirements of reference documents listed in Section 2 do not apply unless specifically stated in the contract. Preparation for delivery requirements for products procured by contractors shall be specified in the individual order.)

5.1 Preservation, packaging, packing, and marking. No preservative shall be applied to the RF cable assemblies. Packaging shall be on nonreturnable reels in accordance with Level A of MIL-C-12000, except that wood lagging shall be nominal 1-in. thick and lagging to PPP-S-760, Type II packaging shall afford protection against physical damage during shipment, handling, uncovered storage, and worldwide distribution. The connector plug (socket contact), cover assembly, and the inboard connector shall be sealed with a removable protective cap and shall be wrapped with cushioning material (Acrotube or Armoflex pipe insulation, or equal) for extra protection. The inboard connector shall be on the outside of the transmission line that is wound on the reel. Reels shall have the dimensions specified in a through c:

a. Hub diameter not less than 18 in.
b. Width not more than 26 in.
c. Outside diameter not more than 36 in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

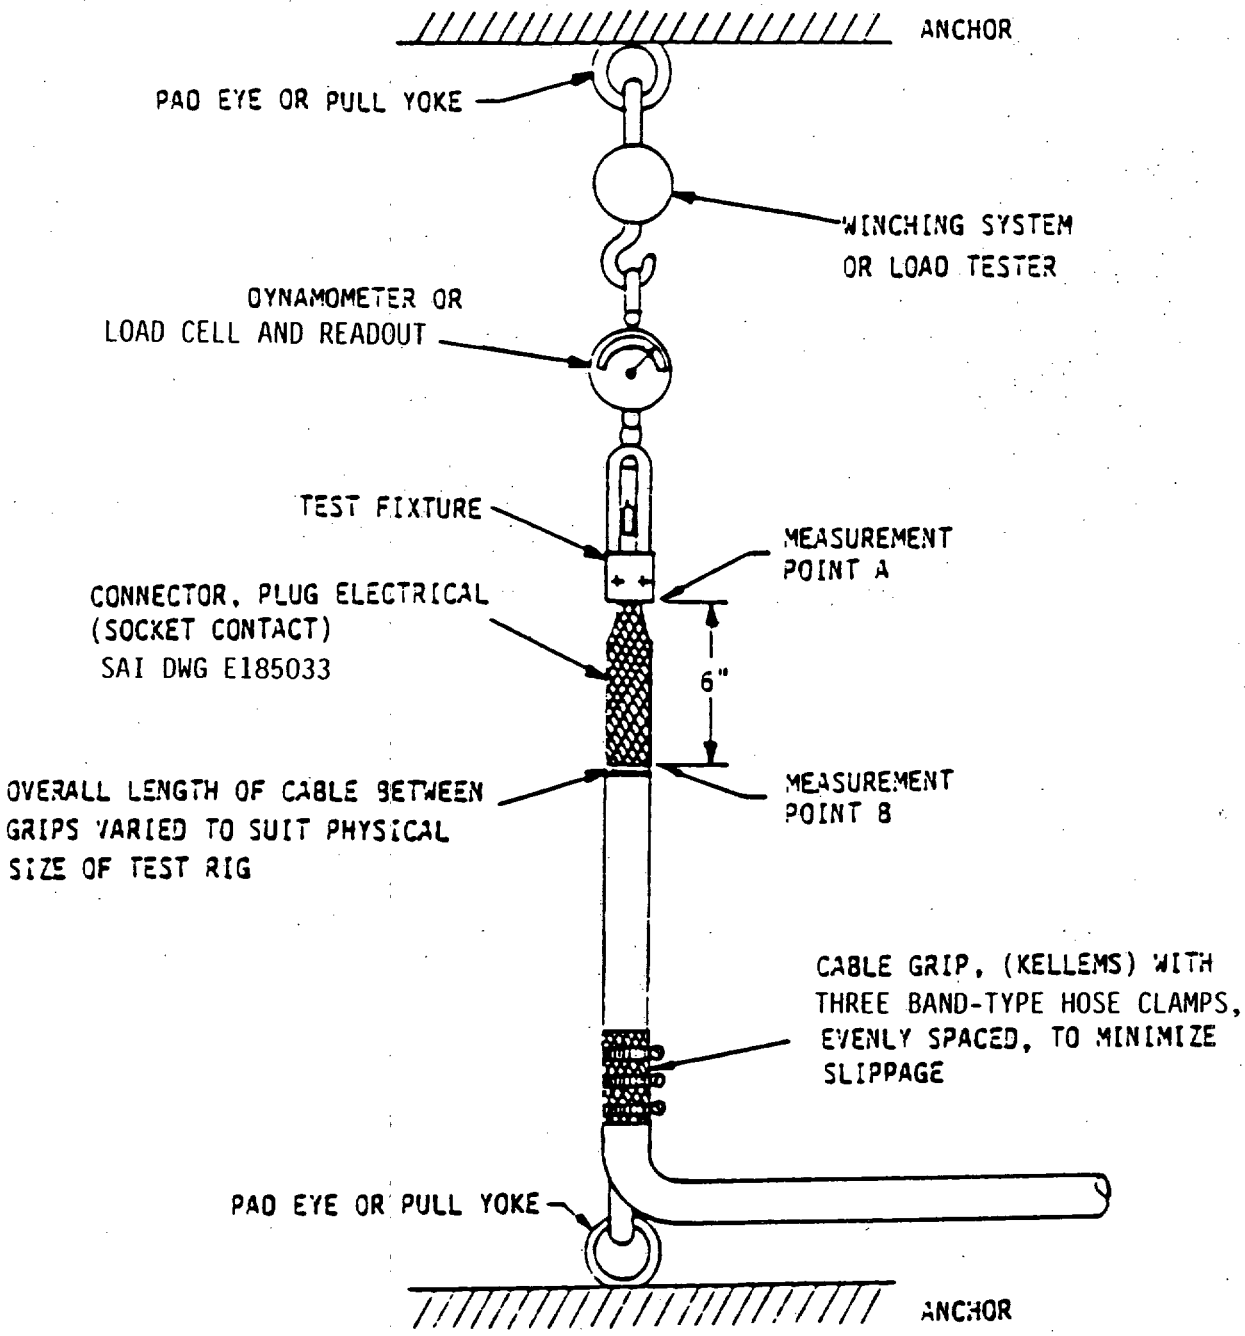


FIGURE 7. Tensile test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

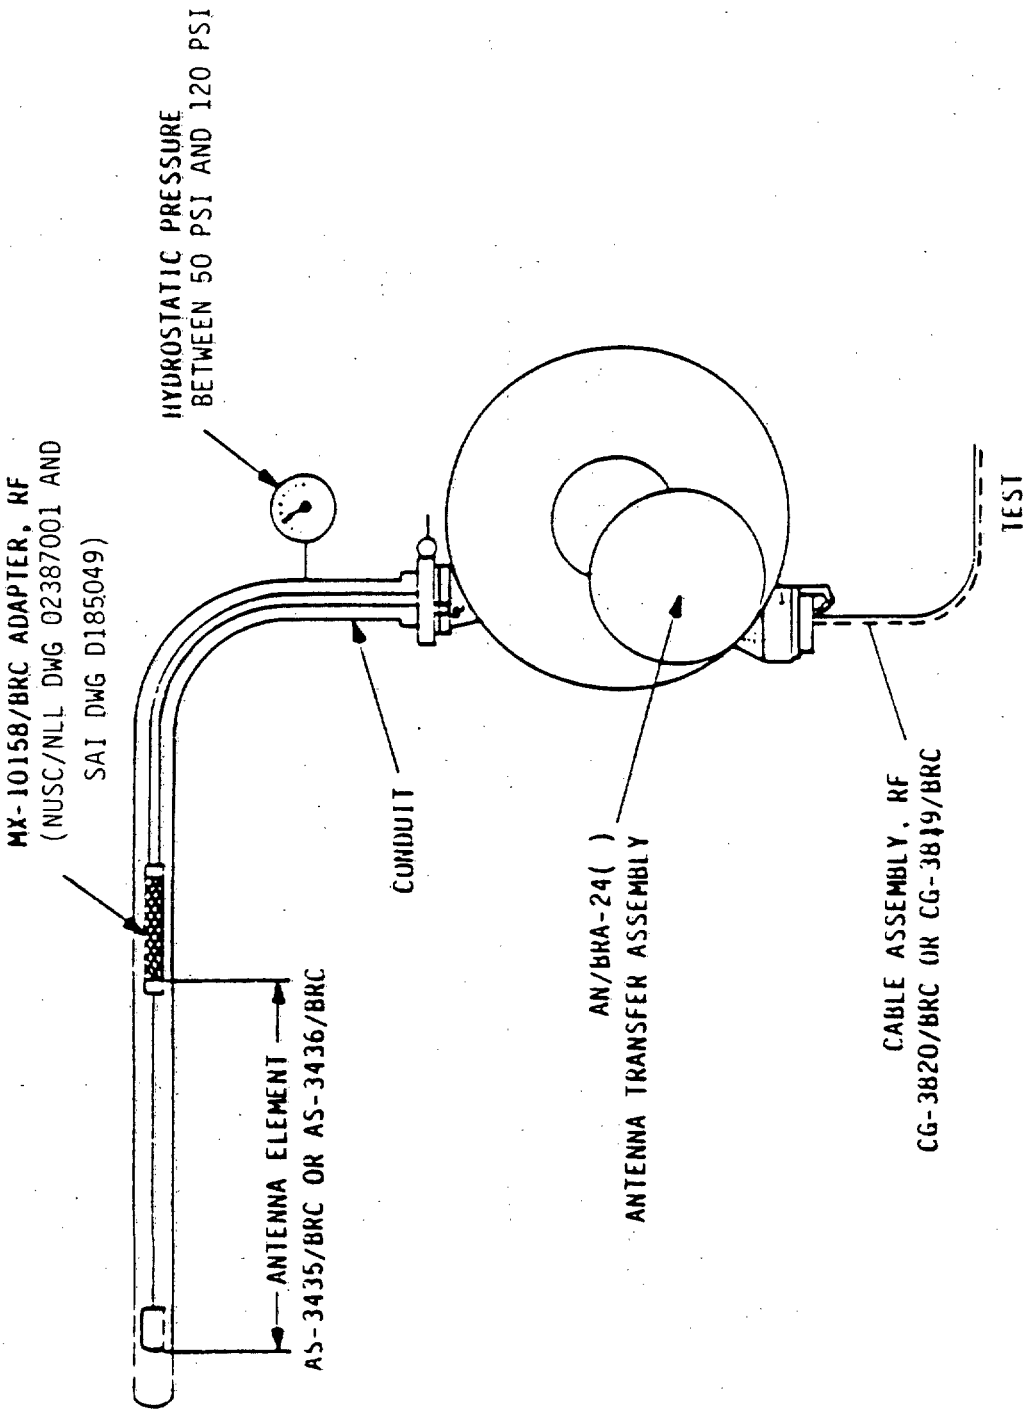


FIGURE 8. AN/BRA-24( ) durability test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The RF cable assemblies covered by this specification are intended for use by submarines as part of Buoyant Cable Antenna Assembly, AS-3434(V)/BRC.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify:

a. Title, number, and date of this specification
b. Cable length, if other than specified in 3.2.2.6
c. Number of first article samples to be submitted if other than specified in 4.3

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List, incorporated into the contract. When the provisions of DoD Federal Acquisition Regulations Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs:

Paragraph	Data requirement	Applicable DID
4.3	First Article Inspection Procedure	DI-T-4901
4.3	First Article Inspection Report	DI-T-4902

(DIDs related to this specification, and identified in Section 6 will be approved and listed as such in DoD 5000.19L, Vol. II, AMSDL. Copies of DIDs required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 First article. When a first article inspection is required, the item(s) should be a first production unit. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Supersession data. This specification includes the requirements of ELEX-C-528, dated 18 August 1982.

Preparing activity:
NAVY - EC

(Project No. 5995-N122(EC))

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28899	Cable Assemblies, RF, CG-3820/BRC, CG-3819/BRC

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Space and Naval Warfare Systems Command
ATTN: SPAWAR 8111
Washington, DC 20363

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:52Z
Check the source to verify that this is the current version before use.