
MILITARY SPECIFICATION

CONNECTORS, ELECTRICAL, PLUGS, TIP, SINGLE
.040 DIAMETER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-28901.

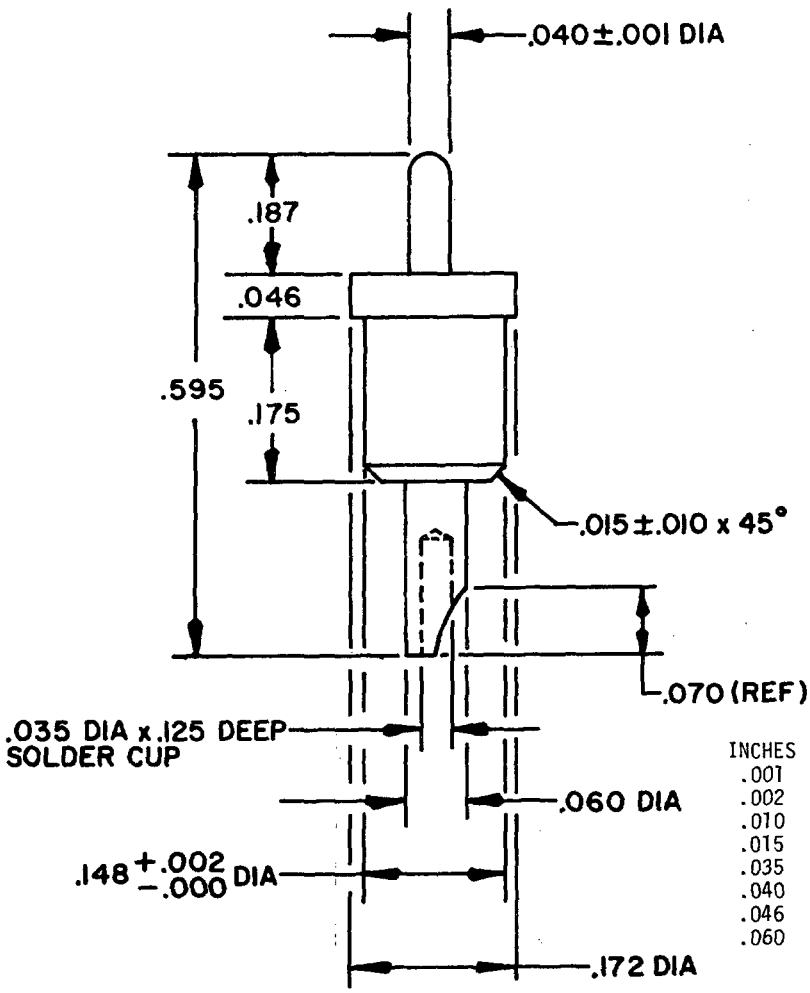

INCHES	MM	INCHES	MM
.001	.03	.070	1.78
.002	.05	.125	3.18
.010	.25	.148	3.76
.015	.38	.172	4.37
.035	.89	.175	4.44
.040	1.02	.187	4.75
.046	1.17	.595	15.11
.060	1.52		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.

FIGURE 1. Configuration and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:55Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Color
-1	Black
-2	Red

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1 and table I.
Test connector: M39024/4-12.
Contact current rating: 3 amperes (max).

Dielectric withstanding voltage (at sea level):
Test voltage: 1,000 volts rms, 60 hertz, shall be applied to insulating material for a period of 15 seconds.
Mating connector: M39024/4-12.

Part number: M28901/12-(dash number from table I).

OPERATING NOTE:

Operating voltage is 300 volts rms, 60 hertz at sea level.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME, EA
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MI, AR
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3054-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:55Z
Check the source to verify that this is the current version before use.