
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PLUGS, TIP, SINGLE, MINIATURE, (TEST POINT PLUG), .080

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-28901.

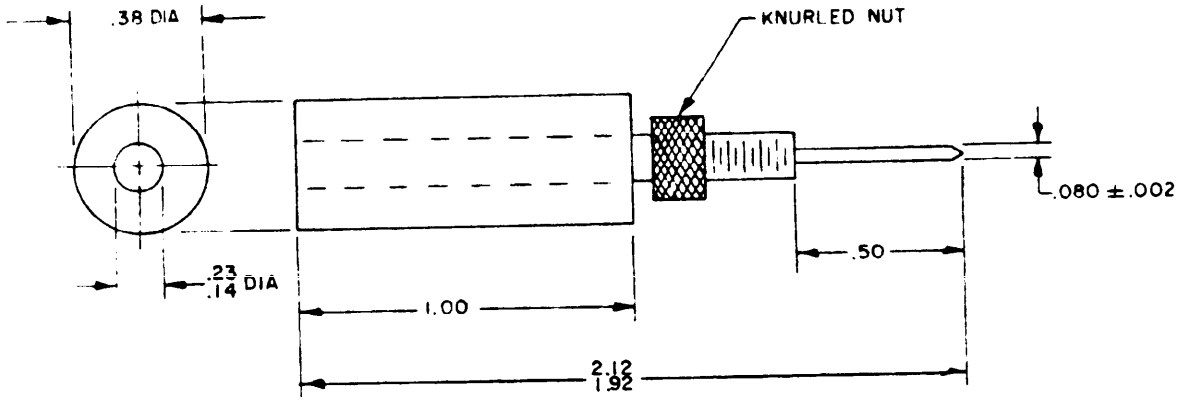

INCHES	MM
.002	.05
.080	2.03
.14	3.6
.23	5.8
.38	9.7
.50	12.7
1.00	25.4
1.92	48.8
2.12	53.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.

FIGURE 1. Configuration and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20261O-20T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Color
-1	Black
-2	Red

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1 and table I.
Terminals: Shall be capable of being wired with one wire per MIL-W-13169.
Test connector: M39024/10.
Contact current rating: 5 amperes (max).

Contact resistance: Test current - 5 amperes.
Measured values: See table II.

Dielectric withstanding voltage (at sea level):
Test voltage: 3,000 volts rms, 60 hertz, shall be applied to insulating material for a period of 15 seconds.
Mating connector: MIL-C-39024.

Part number: M28901/5-(dash number from table I).

TABLE II. Contact resistance.

Test 1/	Voltage drop (max)
Initial	6 mV
After vibration	10 mV
After salt spray (corrosion)	15 mV

1/ The same set of test samples shall be used for the durability, vibration, and salt spray tests.

TABLE III. Supersession and cross reference.

Military part number	Superseded numbers				
	FSCM 1/ 05267	FSCM 83330	FSCM 91967	FSCM 25706	FSCM 74970
M28901/5-1	1922-0 4495-0	201-103 491-103 213-103	856B STEM1604-003	19-09 Black 19-15 Black	105-0303-001 105-0773-001
M28901/5-2	1922-2 4495-2	201-102 491-102	856R STEM1604-002	19-09 Red 19-15 Red	105-0302-001 105-0772-001

1/ FSCM is the federal supply code for manufacturers in accordance with federal supply handbooks H4-1 and H4-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:54Z
Check the source to verify that this is the current version before use.

SUBSTITUTABILITY: See table III.

OPERATING NOTE:

Operating voltage is 300 volts rms, 60 hertz at sea level.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME, EA
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MI, AR
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3054-5)

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T20:54Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:54Z
Check the source to verify that this is the current version before use.