
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PLUGS, TIP, SINGLE,
(TEST POINT PLUG), .080, SOLDERLESS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-28901.

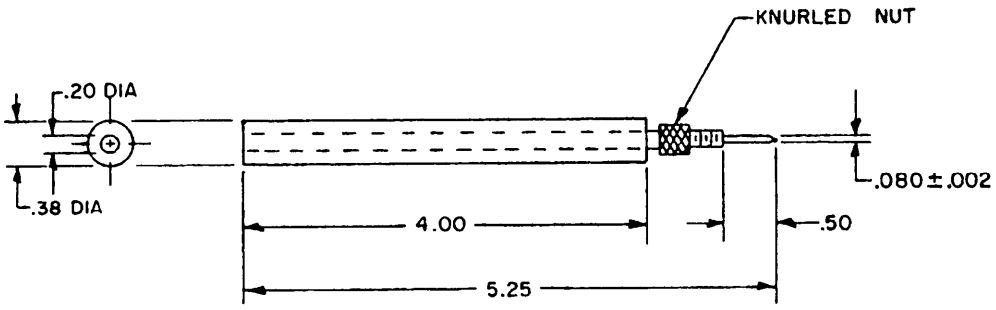

INCHES	MM
.002	.05
.080	2.03
.20	5.1
.38	9.7
.50	12.7
4.00	101.6
5.25	133.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.

FIGURE 1. Configuration and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Color
-1	Black
-2	Red

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1 and table I.
Terminals: Shall be capable of being wired with one wire per MIL-W-13169.
Test connector: M39024/10.
Contact current rating: 5 amperes (max).

Contact resistance: Test current - 5 amperes
Measured values: See table II.

Dielectric withstanding voltage (at sea level):
Test voltage: 3,000 volts rms, 60 hertz, shall be applied to insulating material for a period of 15 seconds.
Mating connector: MIL-C-39024.

Part number: M28901/7 -(dash number from table I).

TABLE II. Contact resistance.

Test 1/	Voltage drop (max)
Initial	6 mV
After vibration	10 mV
After salt spray (corrosion)	15 mV

1/ The same set of test samples shall be used for the durability, vibration, and salt spray tests.

TABLE III. Supersession and cross reference.

Military part number	Superseded numbers		
	FSCM 1/ 25706	FSCM 91967	FSCM 83330
M28901/7-1	19-10 Black 19-43 Black	901 Black 902 Black 997 Black 998 Black	384-103 313-103 314-103 323-103 352-103 353-103 302-103 303-103
M28901/7-2	19-10 Red 19-43 Red	901 Red 902 Red 997 Red 998 Red	384-102 313-102 314-102 323-102 352-102 353-102 302-102 303-102

1/ FSCM is the federal supply code for manufacturers in accordance with federal supply handbook H4-1 and H4-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:54Z
Check the source to verify that this is the current version before use.

SUBSTITUTABILITY: See table III.

OPERATING NOTE:

Operating voltage is 300 volts rms, 60 hertz at sea level.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME, EA
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MI, AR
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3054-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:54Z
Check the source to verify that this is the current version before use.