
MILITARY SPECIFICATION SHEET

OVEN, CRYSTAL (+75° C, +85° C)

The complete requirements for procuring the oven described herein shall consist of this document and the issue in effect of specification MIL-O-39021.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

Pertinent characteristics: 1 crystal, HC-6/U, 15 watts.

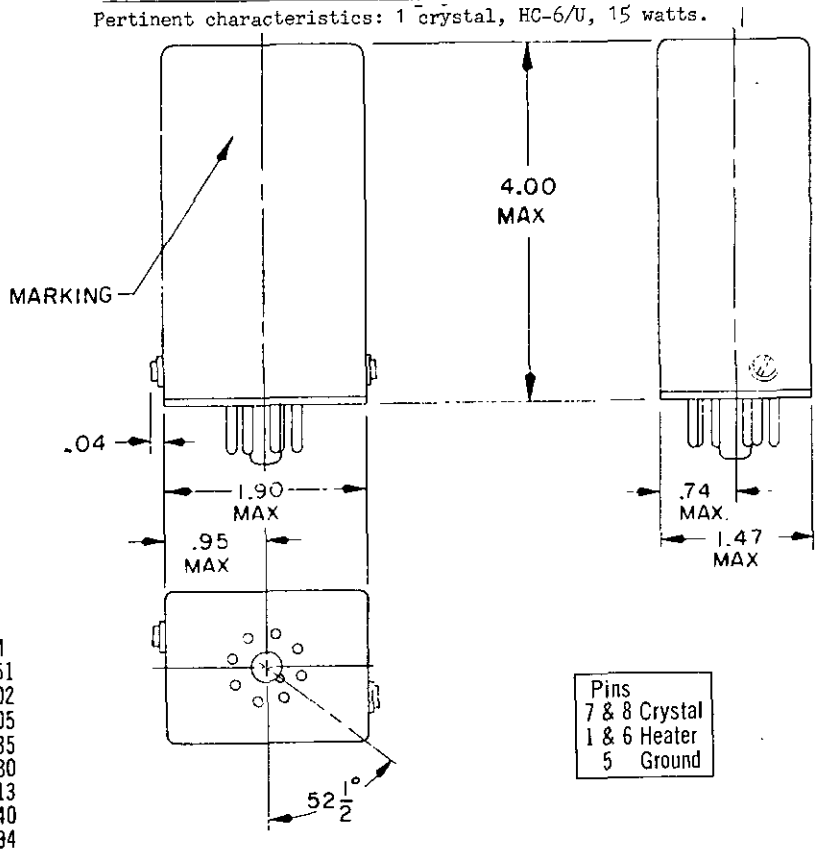

INCHES	MM
.02	.51
.04	1.02
.12	3.05
.25	6.35
.74	18.80
.95	24.13
1.00	25.40
1.47	37.34
1.90	48.26
4.00	101.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.02 and ±5° on angles.

FIGURE 1. Shielded and insulated oven can. FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Materials:
Case: Anodized aluminum.
Base: Type MFE, MIL-M-14.

Design and construction: See figure.

Physical characteristics:
Weight: 8 ounces, maximum.

Oven cavity: Shall accommodate one crystal unit in a HC-6/U holder.

Grounding and circuit continuity: See figure.

Terminal configuration and identification: See figure.

Pin alinement: See figure.

Capacitance: Between pins 7 and 8 with all other pins grounded, 1.5 pf, maximum.

Warmup power: 50 watts, maximum.

Warmup time:
Conditioning prior to test: 1 hour at -40° ±2° C.
Warmup time: Not to exceed 10 minutes.

Peak operating power: 15 watts, maximum.

Operating voltage: See table I.

Oven cavity temperature:

85° ±1.0°C at room ambient.
Stabilization temperature:
+25°C, -55°C, +25°C, +80°C.
Tolerance for, -55°C and +80°C:
±2°C of nominal (85°C).

75° ±1.0°C at room ambient.
Stabilization temperature:
+25°C, -40°C, +25°C, +65°C.
Tolerance for, -40°C and +65°C:
±2°C of nominal (75°C).
Cyclic variations ±0.3°C peak-to-peak, maximum.

Salt spray (corrosion): Not applicable.

Part number: Consists of the basic number of this specification sheet and a sequentially assigned dash number.
Example: M39021/3-1.

TABLE I. Dash number and characteristics.

Rated voltage	Part number M39021/3-	
	+75°C	+85°C
24-28	1	3
110-120	2	4

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, SM
Navy - SH
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - None
Navy - AS, OS, CG
Air Force - 19

Preparing activity:
Army - EL

(Project 5955-0354)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:10Z
Check the source to verify that this is the current version before use.