MILITARY SPECIFICATION SHEET

CIRCUIT BREAKERS, MAGNETIC, LOW-POWER, SEALED, TRIP-FREE
ONE-POLE

This amendment forms a part of MIL-C-39019/1F, dated 26 June 1989, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, change terminal (bottom) view to the following:



PAGE 2

FIGURE 1, circuit diagram Change "(SEE NOTE 11)" to "(SEE NOTE 10)" In front view Change "1 780 MAX" to "1.810 MAX". In right end view, add note "INSULATING BLOCK (SEE NOTE 11)" with arrow pointing to dashed line Change terminal (bottom) view to the following

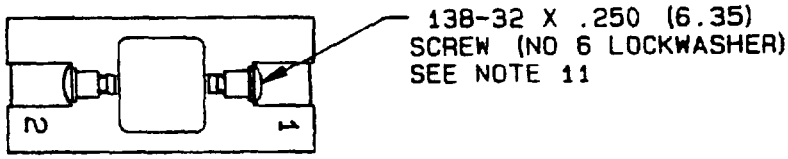

PAGE 3

NOTE 11, delete first two sentences and substitute.

"For configuration 2, add "S" at end of the dash number for screw terminals with insulating block (see table I) When circuit breakers are subjected to the resistance to solvents test, the insulating block shall be removed, and shall not be tested. Main terminal screw MS35265-26 or equivalent."

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:07Z
Check the source to verify that this is the current version before use.

PAGE 8

CONCLUDING MATERIAL Delete and substitute as printed below

CONCLUDING MATERIAL

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - MI
Air Force - 99
NASA - NA
DLA - ES

User activities:
Army - AV, AT
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
~~DLA~~ - ~~ES~~

(Project 5925-0223)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:07Z
Check the source to verify that this is the current version before use.