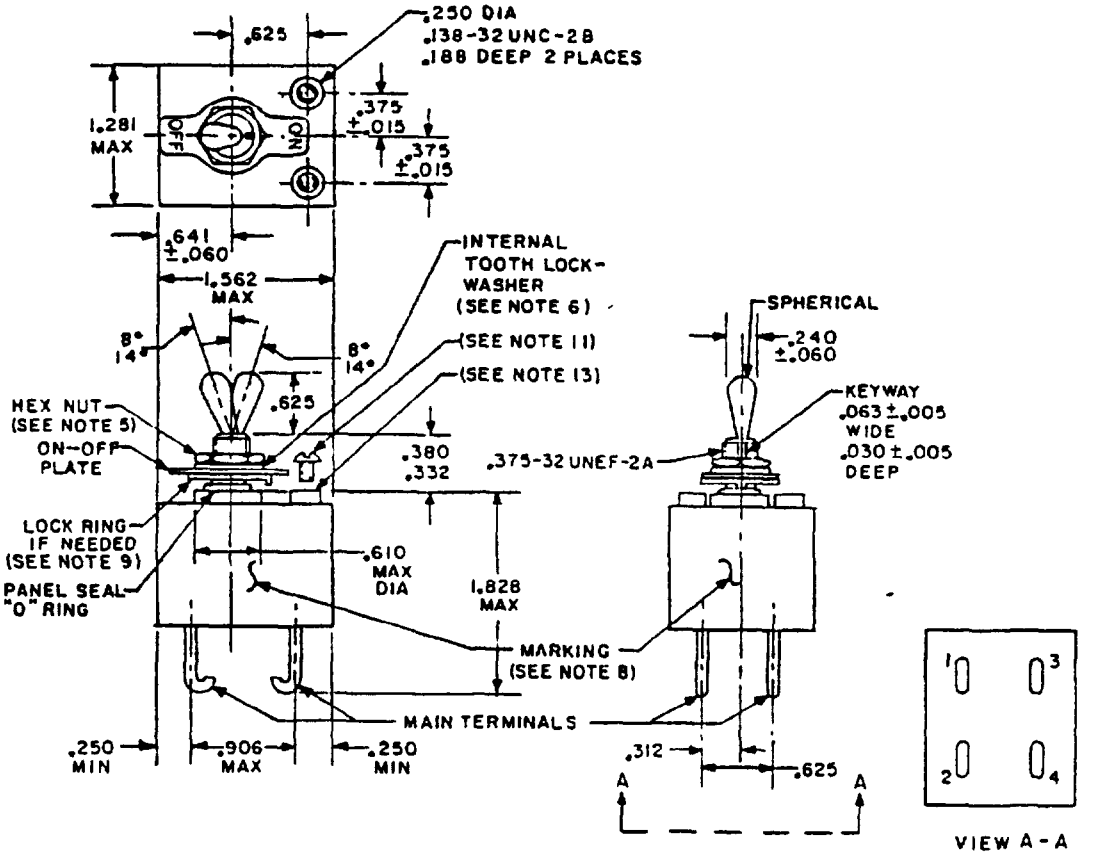
MILITARY SPECIFICATION SHEET

# CIRCUIT BREAKERS, MAGNETIC, LOW-POWER, SEALED, TRIP-FREE

## TWO-POLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-C-39019.





CONFIGURATION 1

FIGURE 1. Circuit breaker configuration.

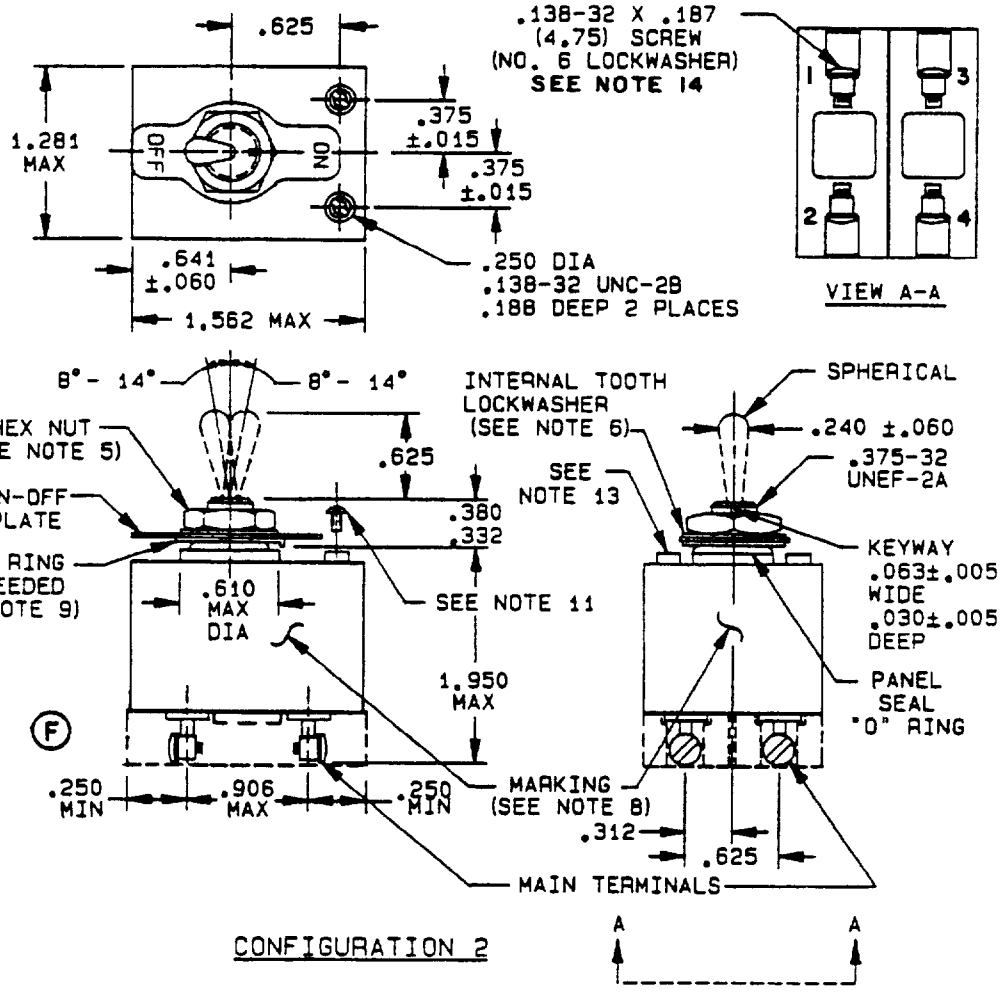
Ⓕ denotes changes


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.



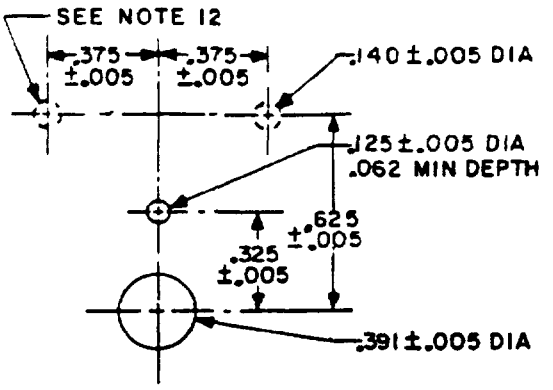

CIRCUIT DIAGRAM
(SEE NOTE 10)




CONFIGURATION 2

FIGURE 1. Circuit breaker configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.




PANEL MOUNTING DETAIL

| Inches | mm | Inches | mm |
|---|---|---|---|
| .005 | 0.13 | .375 | 9.52 |
| .015 | 0.38 | .380 | 9.65 |
| .030 | 0.76 | .382 | 9.70 |
| .060 | 0.79 | .391 | 9.93 |
| .062 | 1.52 | .392 | 9.96 |
| .125 | 1.60 | .493 | 12.52 |
| .138 | 3.18 | .507 | 12.88 |
| .140 | 3.56 | .610 | 15.49 |
| .188 | 4.78 | .625 | 15.88 |
| .240 | 6.10 | .641 | 16.28 |
| .250 | 6.35 | .906 | 23.01 |
| .312 | 7.92 | 1.281 | 32.54 |
| .325 | 8.26 | 1.562 | 39.67 |
| .332 | 8.43 | 1.828 | 46.43 |
| | | 1.950 | 49.53 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.031 (0.79 mm).
4. Envelope design optional.
(F) 5. Hex mounting nut .375-32 UNEF-2B thread, .093 ±.005 (2.36 ±0.13 mm) thick or equivalent MS25082-20, -B20.
(F) 6. Internal tooth lockwasher, .507/.493 O.D., .392/.382 I.D., .025 ±.005 (0.64 ±0.13 mm) thick, stainless steel or equivalent MS35333-134.
7. The effective bushing thread length (not including mounting hardware) is .280 (7.11 mm) minimum.
8. Marking may appear on any surface except the mounting surface.
9. Lock ring not required if on-off plate has locking tab.
10. Numerical marking optional on circuit diagram.
(F) 11. Sealscrew, .138-32 UNC-2A X .312 (7.92 mm) long, stainless steel number 18-8 (type 347) MS35265-25 or equivalent with silicone rubber O-rings. Possible source, AMP Hexseal Corp.
12. Use of panel screws will enhance circuit breaker shock and vibration characteristics.
13. Threaded inserts exceed height of bushing by .005 to .015. (0.13 to 0.38 mm).
(F) 14. For configuration 2 add "S" at end of dash number (see table I). Main terminal screw MS35265-25 or equivalent. Lockwasher, flat-internal tooth, number 6 or MS35333-71.

FIGURE 1. Circuit breaker configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Ⓕ Dimensions and configuration: See figure 1 and note 14.

Weight. For reference only, approximately 100 grams.

Mounting hardware. See figure 1.

Terminals: See figure 1.

Voltage and frequency rating: 50 V dc, maximum and 240 V ac, maximum, at 60 and 400 Hz.

High inrush: 800 percent at 60 Hz and dc, 1400 percent at 400 Hz (see table I).

Current rating: See table I.

Circuit diagram: See figure 1.

Time delay: See table I.

Resistance or impedance: See table I.

Ⓕ Part or Identifying Number (PIN). The PIN shall be M39019/03-(dash number taken from table I) (e.g., M39019/03-200 or M39019/03-200S).

Cross reference: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.

Ⓕ TABLE I. Circuit breaker dash numbers and applicable characteristics.

| Dash number 1/ | | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) 2/ | | |
|---|---|---|---|---|---|---|
| Standard delay | High inrush | | | DC | 60 Hz | 400 Hz |
| 200 | 300 | 0.05 | A | 680.0 | 690.0 | 710.0 |
| 201 | 301 | 0.05 | B | 680.0 | 690.0 | 710.0 |
| 202 | --- | 0.05 | C | 680.0 | 690.0 | 710.0 |
| 203 | 302 | 0.1 | A | 150.0 | 170.0 | 180.0 |
| 204 | 303 | 0.1 | B | 150.0 | 170.0 | 180.0 |
| 205 | --- | 0.1 | C | 150.0 | 170.0 | 180.0 |
| 206 | 304 | 0.25 | A | 20.0 | 26.0 | 27.0 |
| 207 | 305 | 0.25 | B | 20.0 | 26.0 | 27.0 |
| 208 | --- | 0.25 | C | 20.0 | 26.0 | 27.0 |
| 209 | 306 | 0.5 | A | 5.4 | 6.0 | 6.6 |
| 210 | 307 | 0.5 | B | 5.4 | 6.0 | 6.6 |
| 211 | --- | 0.5 | C | 5.4 | 6.0 | 6.6 |
| 212 | 308 | 0.75 | A | 2.5 | 2.7 | 2.8 |
| 213 | 309 | 0.75 | B | 2.5 | 2.7 | 2.8 |
| 214 | --- | 0.75 | C | 2.5 | 2.7 | 2.8 |
| 215 | 310 | 1.0 | A | 1.35 | 1.5 | 1.61 |
| 216 | 311 | 1.0 | B | 1.35 | 1.5 | 1.61 |
| 217 | --- | 1.0 | C | 1.35 | 1.5 | 1.61 |
| 218 | 312 | 2.0 | A | 0.40 | 0.40 | 0.50 |
| 219 | 313 | 2.0 | B | 0.40 | 0.40 | 0.50 |
| 220 | --- | 2.0 | C | 0.40 | 0.40 | 0.50 |
| 221 | 314 | 2.5 | A | 0.25 | 0.25 | 0.27 |
| 222 | 315 | 2.5 | B | 0.25 | 0.25 | 0.27 |
| 223 | --- | 2.5 | C | 0.25 | 0.25 | 0.27 |
| 224 | 316 | 3.0 | A | 0.15 | 0.15 | 0.17 |
| 225 | 317 | 3.0 | B | 0.15 | 0.15 | 0.17 |
| 226 | --- | 3.0 | C | 0.15 | 0.15 | 0.17 |
| 227 | 318 | 4.0 | A | 0.10 | 0.10 | 0.12 |
| 228 | 319 | 4.0 | B | 0.10 | 0.10 | 0.12 |
| 229 | --- | 4.0 | C | 0.10 | 0.10 | 0.12 |
| 230 | 320 | 5.0 | A | 0.061 | 0.063 | 0.072 |
| 231 | 321 | 5.0 | B | 0.061 | 0.063 | 0.072 |
| 232 | --- | 5.0 | C | 0.061 | 0.063 | 0.072 |
| 233 | 322 | 6.0 | A | 0.042 | 0.043 | 0.050 |
| 234 | 323 | 6.0 | B | 0.042 | 0.043 | 0.050 |
| 235 | --- | 6.0 | C | 0.042 | 0.043 | 0.050 |
| 236 | 324 | 7.0 | A | 0.036 | 0.036 | 0.040 |
| 237 | 325 | 7.0 | B | 0.036 | 0.036 | 0.040 |
| 238 | --- | 7.0 | C | 0.036 | 0.036 | 0.040 |
| 239 | 326 | 7.5 | A | 0.031 | 0.031 | 0.038 |
| 240 | 327 | 7.5 | B | 0.031 | 0.031 | 0.038 |
| 241 | --- | 7.5 | C | 0.031 | 0.031 | 0.038 |
| 242 | 328 | 8.0 | A | 0.027 | 0.028 | 0.035 |
| 243 | 329 | 8.0 | B | 0.027 | 0.028 | 0.035 |
| 244 | --- | 8.0 | C | 0.027 | 0.028 | 0.035 |
| 245 | 330 | 9.0 | A | 0.022 | 0.022 | 0.028 |
| 246 | 331 | 9.0 | B | 0.022 | 0.022 | 0.028 |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.

Ⓕ TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

| Dash number 1/ | | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) 2/ | | |
|---|---|---|---|---|---|---|
| Standard delay | High inrush | | | DC | 60 Hz | 400 Hz |
| 247 | --- | 9.0 | C | 0.022 | 0.022 | 0.028 |
| 248 | 332 | 10.0 | A | 0.018 | 0.021 | 0.024 |
| 249 | 333 | 10.0 | B | 0.018 | 0.021 | 0.024 |
| 250 | --- | 10.0 | C | 0.018 | 0.021 | 0.024 |
| 251 | 334 | 12.5 | A | 0.012 | 0.013 | 0.015 |
| 252 | 335 | 12.5 | B | 0.012 | 0.013 | 0.015 |
| 253 | --- | 12.5 | C | 0.012 | 0.013 | 0.015 |
| 254 | 336 | 15.0 | A | 0.009 | 0.009 | 0.010 |
| 255 | 337 | 15.0 | B | 0.009 | 0.009 | 0.010 |
| 256 | --- | 15.0 | B | 0.009 | 0.009 | 0.010 |
| 257 | 338 | 20.0 | A | 0.006 | 0.006 | 0.007 |
| 258 | 339 | 20.0 | B | 0.006 | 0.006 | 0.007 |
| 259 | --- | 20.0 | C | 0.006 | 0.006 | 0.007 |
| 260 | 340 | 1.25 | A | .9 | 1.0 | 1.1 |
| 261 | 341 | 1.25 | B | .9 | 1.0 | 1.1 |
| 262 | --- | 1.25 | C | .9 | 1.0 | 1.1 |
| 263 | 342 | 1.5 | A | .65 | .70 | .75 |
| 264 | 343 | 1.5 | B | .65 | .70 | .75 |
| 265 | --- | 1.5 | C | .65 | .70 | .75 |

1/ For configuration 2, add "S" at end of dash number.

2/ The corresponding maximum wattage losses, which in no case shall exceed 3.0 watts, may be calculated as $I^2R$ or $I^2Z$.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.

TABLE II. Cross reference of superseded part numbers.

| Superseded MIL-C-39019/3B part number M39019/3- | New part number M39019/03- | Superseded MIL-C-39019/3B part number M39019/3- | New part number M39019/03- | Superseded MIL-C-39019/3B part number M39019/3- | New part number M39019/03- |
|---|---|---|---|---|---|
| 1 | 200 | 42 | 231 | 83 | 218 |
| 2 | 201 | 43 | 230 | 84 | 219 |
| 3 | 200 | 44 | 231 | 85 | 218 |
| 4 | 201 | 45 | 230 | 86 | 219 |
| 5 | 200 | 46 | 231 | 87 | 227 |
| 6 | 201 | 47 | 230 | 88 | 228 |
| 7 | 200 | 48 | 231 | 89 | 227 |
| 8 | 201 | 49 | 230 | 90 | 228 |
| 9 | 200 | 50 | 231 | 91 | 227 |
| 10 | 201 | 51 | 248 | 92 | 228 |
| 11 | 209 | 52 | 249 | 93 | 233 |
| 12 | 210 | 53 | 248 | 94 | 234 |
| 13 | 209 | 54 | 249 | 95 | 233 |
| 14 | 210 | 55 | 248 | 96 | 234 |
| 15 | 209 | 56 | 249 | 97 | 233 |
| 16 | 210 | 57 | 248 | 98 | 234 |
| 17 | 209 | 58 | 249 | 99 | 236 |
| 18 | 210 | 59 | 248 | 100 | 237 |
| 19 | 209 | 60 | 249 | 101 | 236 |
| 20 | 210 | 61 | 254 | 102 | 237 |
| 21 | 215 | 62 | 255 | 103 | 236 |
| 22 | 216 | 63 | 254 | 104 | 237 |
| 23 | 215 | 64 | 255 | 105 | 242 |
| 24 | 216 | 65 | 254 | 106 | 243 |
| 25 | 215 | 66 | 255 | 107 | 242 |
| 26 | 216 | 67 | 254 | 108 | 243 |
| 27 | 215 | 68 | 255 | 109 | 242 |
| 28 | 216 | 69 | 254 | 110 | 243 |
| 29 | 215 | 70 | 255 | 111 | 245 |
| 30 | 216 | 71 | 257 | 112 | 246 |
| 31 | 224 | 72 | 258 | 113 | 245 |
| 32 | 225 | 73 | 257 | 114 | 246 |
| 33 | 224 | 74 | 258 | 115 | 245 |
| 34 | 225 | 75 | 257 | 116 | 246 |
| 35 | 224 | 76 | 258 | 117 | 251 |
| 36 | 225 | 77 | 257 | 118 | 252 |
| 37 | 224 | 78 | 258 | 119 | 251 |
| 38 | 225 | 79 | 257 | 120 | 252 |
| 39 | 224 | 80 | 258 | 121 | 251 |
| 40 | 225 | 81 | 218 | 122 | 252 |
| 41 | 230 | 82 | 219 | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AV, AT
Navy - AS, MC
Air Force - 19

Preparing activity.
Army - ER

Agent:
DLA-ES

(Project 5925-0200-3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:08Z
Check the source to verify that this is the current version before use.