INCH-POUND
MIL-PRF-39019/5H
w/AMENDMENT 1
5 March 2025
SUPERSEDING
MIL-PRF-39019/5H
14 May 2010

PERFORMANCE SPECIFICATION SHEET

# CIRCUIT BREAKERS, MAGNETIC, LOW-POWER, SEALED, TRIP-FREE THREE-POLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39019.

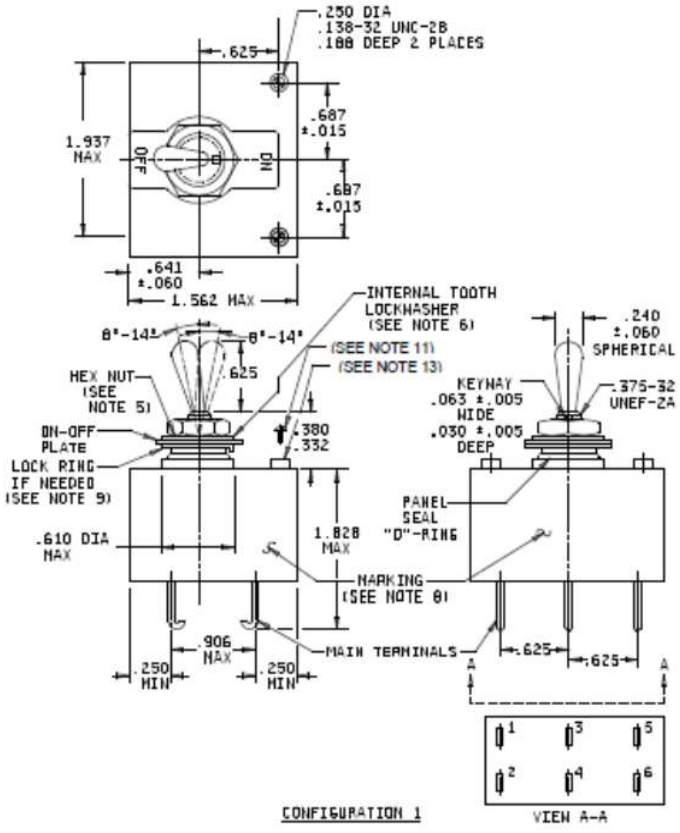



FIGURE 1. Circuit breaker configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.


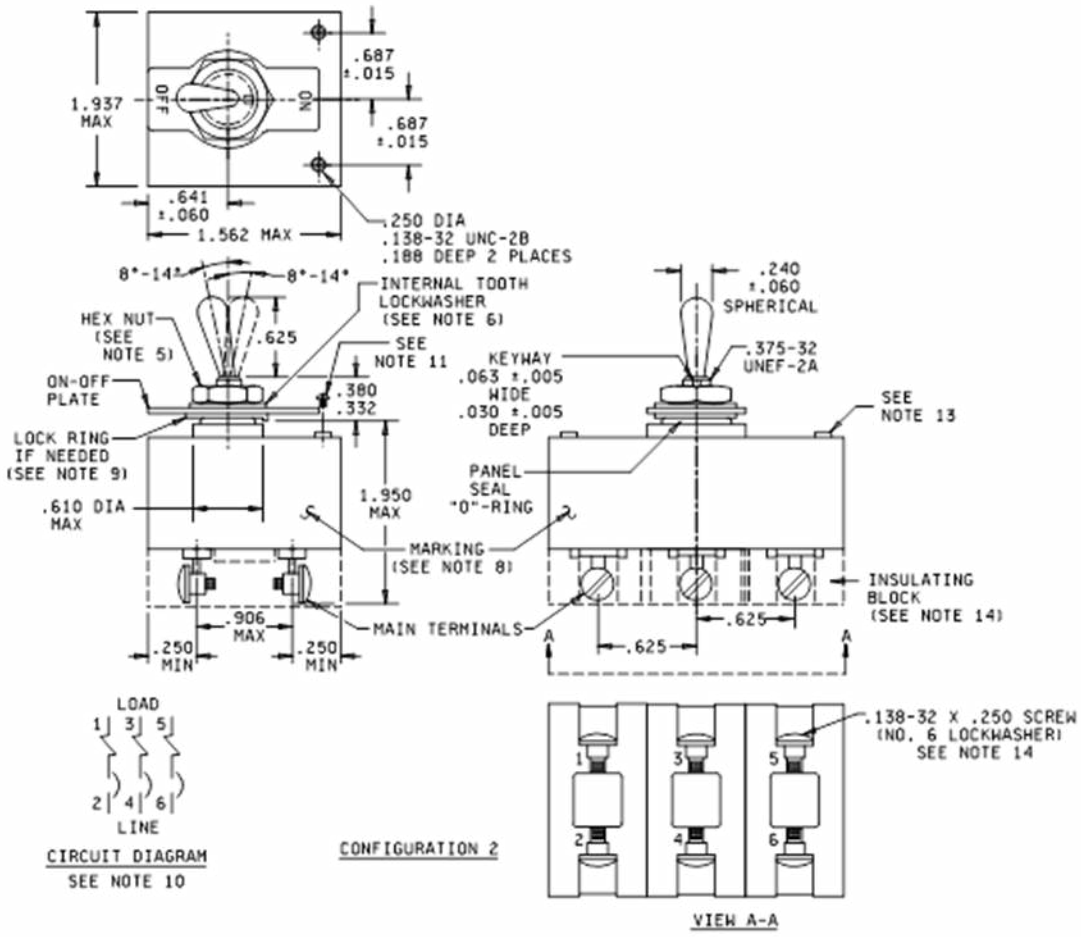



FIGURE 1. Circuit breaker configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.

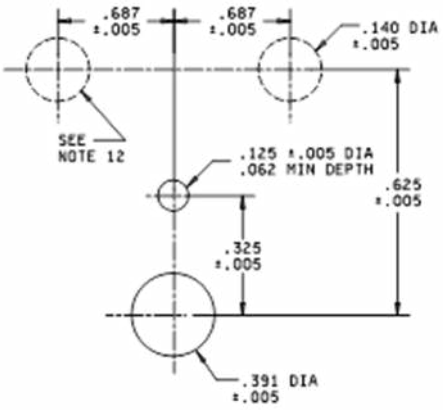

PANEL MOUNTING DETAIL

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .005 | 0.13 | .125 | 3.18 | .325 | 8.26 | .392 | 9.96 | .687 | 17.45 |
| .015 | 0.38 | .138 | 3.51 | .332 | 8.43 | .493 | 12.52 | .906 | 23.01 |
| .030 | 0.76 | .140 | 3.56 | .375 | 9.52 | .507 | 12.88 | 1.562 | 39.67 |
| .060 | 1.52 | .188 | 4.78 | .380 | 9.65 | .610 | 15.49 | 1.828 | 46.43 |
| .062 | 1.57 | .240 | 6.10 | .382 | 9.70 | .625 | 15.88 | 1.937 | 49.20 |
| .063 | 1.60 | .250 | 6.35 | .391 | 9.93 | .641 | 16.28 | 1.950 | 49.53 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.031 (0.79 mm).
4. The shape of the circuit breaker is shown for information only. Slight deviations from this outline drawing, which do not alter the functional aspect of the device, are acceptable.
5. Hex mounting nut .375-32 UNEF-2B thread, .093 ±.005 (2.36 ±0.13 mm) thick or equivalent MS25082-20, -B20.
6. Internal tooth lockwasher, .507/.493 O.D., .392/.382 I.D., .025 ±.005 (0.64 ±0.13mm) thick, stainless steel or equivalent AIA/NAS NASM35333-134.
7. The effective bushing thread length (not including mounting hardware) is .280 (7.11 mm) minimum.
8. Marking may appear on any surface except the mounting surface.
9. Lock ring not required if on-off plate has locking tab.
10. Numerical marking optional on circuit diagram.
11. Sealscrew, .138-32 UNC-2A x .312 (7.92 mm) long, stainless steel number 18-8 (type 347) MS35265-25 or equivalent with appropriate O-rings. O-rings should be chosen to enable the circuit breaker to meet the performance requirements of this specification. Possible source: AMP Hexseal Corporation.
12. Use of panel screws will enhance circuit breaker shock and vibration characteristics.
13. Threaded inserts exceed height of bushing by .005 to .015 (0.13 mm to 0.38 mm).
14. For configuration 2 add "S" at end of the dash number for screw terminals with insulating blocks (see table I). When circuit breakers are subjected to the resistance to solvents test, the insulating blocks shall be removed and shall not be tested. Main terminal screw MS35265-26 or equivalent. Lockwasher, Flat-internal tooth, number 6 or AIA/NAS NASM35333-71.

FIGURE 1. Circuit breaker configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and note 14.

Weight: For reference only, approximately 150 grams.

Mounting hardware: See figure 1.

Terminals: See figure 1.

Voltage and frequency rating: 50 V dc, maximum and 240 V ac, maximum at 60 Hz and 400 Hz.

High inrush: 800 percent at 60 Hz and dc, 1,400 percent at 400 Hz (see table I).

Current rating: See table I.

Circuit diagram: See figure 1.

Time delay: See table I.

Resistance or impedance: See table I.

Part or Identifying Number (PIN): The PIN shall be M39019/05-(dash number taken from table I) (e.g., M39019/06-200, M39019/05-200S).

Cross reference: See table II.

TABLE I. Circuit breaker dash numbers and applicable characteristics.

| Dash number 1/ | | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) 2/ | | |
|---|---|---|---|---|---|---|
| Standard delay | High inrush | | | DC | 60 Hz | 400 Hz |
| 200 | 300 | 0.05 | A | 680.0 | 690.0 | 710.0 |
| 201 | 301 | 0.05 | B | 680.0 | 690.0 | 710.0 |
| 202 | - - - | 0.05 | C | 680.0 | 690.0 | 710.0 |
| 203 | 302 | 0.1 | A | 150.0 | 170.0 | 180.0 |
| 204 | 303 | 0.1 | B | 150.0 | 170.0 | 180.0 |
| 205 | - - - | 0.1 | C | 150.0 | 170.0 | 180.0 |
| 206 | 304 | 0.25 | A | 20.0 | 26.0 | 27.0 |
| 207 | 305 | 0.25 | B | 20.0 | 26.0 | 27.0 |
| 208 | - - - | 0.25 | C | 20.0 | 26.0 | 27.0 |
| 209 | 306 | 0.5 | A | 5.4 | 6.0 | 6.6 |
| 210 | 307 | 0.5 | B | 5.4 | 6.0 | 6.6 |
| 211 | - - - | 0.5 | C | 5.4 | 6.0 | 6.6 |
| 212 | 308 | 0.75 | A | 2.5 | 2.7 | 2.8 |
| 213 | 309 | 0.75 | B | 2.5 | 2.7 | 2.8 |
| 214 | - - - | 0.75 | C | 2.5 | 2.7 | 2.8 |
| 215 | 310 | 1.0 | A | 1.35 | 1.5 | 1.61 |

See footnotes at end of table.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.

| Dash number 1/ | | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) 2/ | | |
|---|---|---|---|---|---|---|
| Standard delay | High inrush | | | DC | 60 Hz | 400 Hz |
| 216 | 311 | 1.0 | B | 1.35 | 1.5 | 1.61 |
| 217 | - - - | 1.0 | C | 1.35 | 1.5 | 1.61 |
| 218 | 312 | 2.0 | A | 0.40 | 0.40 | 0.50 |
| 219 | 313 | 2.0 | B | 0.40 | 0.40 | 0.50 |
| 220 | - - - | 2.0 | C | 0.40 | 0.40 | 0.50 |
| 221 | 314 | 2.5 | A | 0.25 | 0.25 | 0.27 |
| 222 | 315 | 2.5 | B | 0.25 | 0.25 | 0.27 |
| 223 | - - - | 2.5 | C | 0.25 | 0.25 | 0.27 |
| 224 | 316 | 3.0 | A | 0.15 | 0.15 | 0.17 |
| 225 | 317 | 3.0 | B | 0.15 | 0.15 | 0.17 |
| 226 | - - - | 3.0 | C | 0.15 | 0.15 | 0.17 |
| 227 | 318 | 4.0 | A | 0.10 | 0.10 | 0.12 |
| 228 | 319 | 4.0 | B | 0.10 | 0.10 | 0.12 |
| 229 | - - - | 4.0 | C | 0.10 | 0.10 | 0.12 |
| 230 | 320 | 5.0 | A | 0.061 | 0.063 | 0.072 |
| 231 | 321 | 5.0 | B | 0.061 | 0.063 | 0.072 |
| 232 | - - - | 5.0 | C | 0.061 | 0.063 | 0.072 |
| 233 | 322 | 6.0 | A | 0.042 | 0.043 | 0.050 |
| 234 | 323 | 6.0 | B | 0.042 | 0.043 | 0.050 |
| 235 | - - - | 6.0 | C | 0.042 | 0.043 | 0.050 |
| 236 | 324 | 7.0 | A | 0.036 | 0.036 | 0.040 |
| 237 | 325 | 7.0 | B | 0.036 | 0.036 | 0.040 |
| 238 | - - - | 7.0 | C | 0.036 | 0.036 | 0.040 |
| 239 | 326 | 7.5 | A | 0.031 | 0.031 | 0.038 |
| 240 | 327 | 7.5 | B | 0.031 | 0.031 | 0.038 |
| 241 | - - - | 7.5 | C | 0.031 | 0.031 | 0.038 |
| 242 | 328 | 8.0 | A | 0.027 | 0.028 | 0.035 |
| 243 | 329 | 8.0 | B | 0.027 | 0.028 | 0.035 |
| 244 | - - - | 8.0 | C | 0.027 | 0.028 | 0.035 |
| 245 | 330 | 9.0 | A | 0.022 | 0.022 | 0.028 |
| 246 | 331 | 9.0 | B | 0.022 | 0.022 | 0.028 |
| 247 | - - - | 9.0 | C | 0.022 | 0.022 | 0.028 |
| 248 | 332 | 10.0 | A | 0.018 | 0.021 | 0.024 |
| 249 | 333 | 10.0 | B | 0.018 | 0.021 | 0.024 |
| 250 | - - - | 10.0 | C | 0.018 | 0.021 | 0.024 |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

| Dash number 1/ | | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) 2/ | | |
|---|---|---|---|---|---|---|
| Standard delay | High inrush | | | DC | 60 Hz | 400 Hz |
| 251 | 334 | 12.5 | A | 0.012 | 0.013 | 0.015 |
| 252 | 335 | 12.5 | B | 0.012 | 0.013 | 0.015 |
| 253 | - - - | 12.5 | C | 0.012 | 0.013 | 0.015 |
| 254 | 336 | 15.0 | A | 0.009 | 0.009 | 0.010 |
| 255 | 337 | 15.0 | B | 0.009 | 0.009 | 0.010 |
| 256 | - - - | 15.0 | C | 0.009 | 0.009 | 0.010 |
| 257 | 338 | 20.0 | A | 0.006 | 0.006 | 0.007 |
| 258 | 339 | 20.0 | B | 0.006 | 0.006 | 0.007 |
| 259 | - - - | 20.0 | C | 0.006 | 0.006 | 0.007 |
| 260 | 340 | 1.25 | A | 0.9 | 1.0 | 1.1 |
| 261 | 341 | 1.25 | B | 0.9 | 1.0 | 1.1 |
| 262 | - - - | 1.25 | C | 0.9 | 1.0 | 1.1 |
| 263 | 342 | 1.5 | A | 0.65 | 0.70 | 0.75 |
| 264 | 343 | 1.5 | B | 0.65 | 0.70 | 0.75 |
| 265 | - - - | 1.5 | C | 0.65 | 0.70 | 0.75 |

1/ For configuration 2, add "S" at end of dash number.
2/ The corresponding maximum wattage losses, which in no case shall exceed 3.0 watts, may be calculated as $I^2R$ or $I^2Z$



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.

TABLE II. Cross reference of superseded part numbers.

| Superseded MIL-C-39019/5B part number M39019/5- | New part number M39019/05- | Superseded MIL-C-39019/5B part number M39019/5- | New part number M39019/05- | Superseded MIL-C-39019/5B part number M39019/5- | New part number M39019/05- |
|---|---|---|---|---|---|
| 1 | 200 | 41 | 230 | 81 | 218 |
| 2 | 201 | 42 | 231 | 82 | 219 |
| 3 | 200 | 43 | 230 | 83 | 218 |
| 4 | 201 | 44 | 231 | 84 | 219 |
| 5 | 200 | 45 | 230 | 85 | 218 |
| 6 | 201 | 46 | 231 | 86 | 219 |
| 7 | 200 | 47 | 230 | 87 | 227 |
| 8 | 201 | 48 | 231 | 88 | 228 |
| 9 | 200 | 49 | 230 | 89 | 227 |
| 10 | 201 | 50 | 231 | 90 | 228 |
| 11 | 209 | 51 | 248 | 91 | 227 |
| 12 | 210 | 52 | 249 | 92 | 228 |
| 13 | 209 | 53 | 248 | 93 | 233 |
| 14 | 210 | 54 | 249 | 94 | 234 |
| 15 | 209 | 55 | 248 | 95 | 233 |
| 16 | 210 | 56 | 249 | 96 | 234 |
| 17 | 209 | 57 | 248 | 97 | 233 |
| 18 | 210 | 58 | 249 | 98 | 234 |
| 19 | 209 | 59 | 248 | 99 | 236 |
| 20 | 210 | 60 | 249 | 100 | 237 |
| 21 | 215 | 61 | 254 | 101 | 236 |
| 22 | 216 | 62 | 255 | 102 | 237 |
| 23 | 215 | 63 | 254 | 103 | 236 |
| 24 | 216 | 64 | 255 | 104 | 237 |
| 25 | 215 | 65 | 254 | 105 | 242 |
| 26 | 216 | 66 | 255 | 106 | 243 |
| 27 | 215 | 67 | 254 | 107 | 242 |
| 28 | 216 | 68 | 255 | 108 | 243 |
| 29 | 215 | 69 | 254 | 109 | 242 |
| 30 | 216 | 70 | 255 | 110 | 243 |
| 31 | 224 | 71 | 257 | 111 | 245 |
| 32 | 225 | 72 | 258 | 112 | 246 |
| 33 | 224 | 73 | 257 | 113 | 245 |
| 34 | 225 | 74 | 258 | 114 | 246 |
| 35 | 224 | 75 | 257 | 115 | 245 |
| 36 | 225 | 76 | 258 | 116 | 246 |
| 37 | 224 | 77 | 257 | 117 | 251 |
| 38 | 225 | 78 | 258 | 118 | 252 |
| 39 | 224 | 79 | 257 | 119 | 251 |
| 40 | 225 | 80 | 258 | 120 | 252 |
| | | | | 121 | 251 |
| | | | | 122 | 252 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-39019, this specification sheet references the following documents:
MS25082
AIA/NAS NASM35333
MS35265

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AT, AV, MI
Navy - AS, MC
Air Force - 19

Preparing activity:
DLA - CC

(Project 5925-2025-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:09Z
Check the source to verify that this is the current version before use.