INCH-POUND

MIL-C-85049/10A
30 November 1990
SUPERSEDING
MIL-C-85049/10
16 January 1980
MS3437D
10 May 1982

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, CABLE SEALING, STRAIGHT, SHIELD TERMINATION, CATEGORY 1A (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

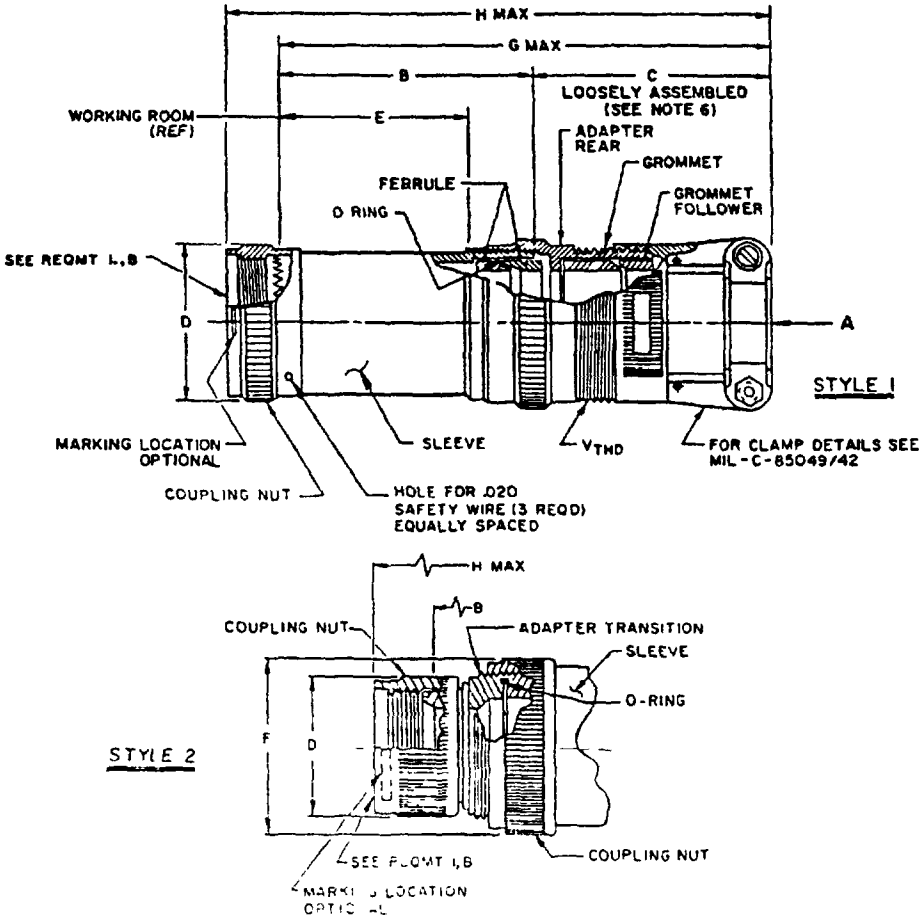


FIGURE 1. Configuration and dimensions

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash No.	Fits Shell of Connector: MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III	Clamp Size	A (see note 6) Wire Bundle Accommodation Range Min	A (see note 6) Wire Bundle Accommodation Range Max	Style	B ±.125	C Ref	D Dia Max
01	3				4	.125	.250	1	2.00	1.544	.669
02									3.00		
03					6	.250	.437	2	2.75	1.544	.669
04									3.75		
05		8	8S	8	4	.125	.250	1	2.00	1.544	.617
06									3.00		
07					6	.250	.437	2	2.75	1.544	.617
08									3.75		
09		10	10S, 10SL	10	4	.125	.312	1	2.00	1.544	.734
10									3.00		
11					6	.250	.437	2	2.75	1.544	.734
12									3.75		
13	7	12	12,12S	12	6	.250	.437	1	2.00	1.544	.858
14									3.00		
15					10	.350	.625	2	2.75	1.844	.858
16									3.75		
17	12	14	14,14S	14	10	.350	.575	1	2.00	1.844	.984
18									3.00		
19					12	.500	.750	2	2.75	1.916	.984
20									3.75		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
01	1.06	.625-24 UNEF	-	3.66	4.02
02	2.06			4.66	5.02
03	1.81	.750-20 UNEF	.858	4.41	4.77
04	2.81			5.41	5.77
05	1.06	.625-24 UNEF	-	3.66	4.02
06	2.06			4.66	5.02
07	1.81	.750-20 UNEF	.858	4.41	4.77
08	2.81			5.41	5.77
09	1.06	.625-24 UNEF	-	3.66	4.02
10	2.06			4.66	5.02
11	1.81	.750-20 UNEF	.858	4.41	4.77
12	2.81			5.41	5.77
13	1.06	.750-20 UNEF	-	3.66	4.02
14	2.06			4.66	5.02
15	1.67	1.000-20 UNEF	1.112	4.71	5.07
16	2.67			5.71	6.07
17	0.92	1.000-20 UNEF	-	3.96	4.32
18	1.92			4.96	5.32
19	1.67	1.1875-18 UNEF	1.218	4.78	5.14
20	2.87			5.78	6.14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
21	19	16	16,16S	16	12	.500	.700	1	2.00	1.916	1.112
22									3.00		
23					16	.625	.937	2	2.75	2.000	1.112
24									3.75		
25	27	18	18	18	10	.350	.625	1	2.00	1.844	1.218
26									3.00		
27					12	.500	.750	1	2.00	1.916	1.218
28									3.00		
29					16	.625	.937	2	2.75	2.000	1.218
30									3.75		
31	37	20	20	20	10	.350	.625	1	3.00	1.844	1.345
32									4.00		
33					12	.500	.750	1	3.00	1.916	1.345
34									4.00		
35					16	.625	.937	2	3.75	2.000	1.345
36									4.75		
37					20	.875	1.250	2	3.75	2.230	1.345
38									4.75		
39		22	22	22	10	.350	.625	1	3.00	1.844	1.468
40									4.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
21	0.92	1.1875-18 UNEF	-	4.03	4.39
22	1.92			5.03	5.39
23	1.67	1.4375-18 UNEF	1.468	4.87	5.23
24	2.67			5.87	6.23
25	0.92	1.000-20 UNEF	-	3.96	4.32
26	1.92			4.96	5.32
27	0.92	1.1875-18 UNEF	-	4.03	4.39
28	1.92			5.03	5.39
29	1.67	1.4375-18 UNEF	1.468	4.87	5.23
30	2.67			5.87	6.23
31	1.92	1.000-20 UNEF	-	4.96	5.32
32	2.92			5.96	6.32
33	1.92	1.1875-18 UNEF	-	5.03	5.39
34	2.92			6.03	6.39
35	2.67	1.4375-18 UNEF	1.468	5.87	6.23
36	3.67			6.87	7.23
37	2.67	1.750-18 UNS	1.969	6.10	6.46
38	3.67			7.10	7.46
39	1.92	1.000-20 UNEF	-	4.96	5.32
40	2.92			5.96	6.32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
41					12	.500	.750	1	3.00	1.916	1.468
42									4.00		
43					16	.625	.937	1	3.00	2.000	1.468
44		22	22	22					4.00		
45					20	.875	1.250	2	3.75	2.230	1.468
46									4.75		
47					12	.500	.750	1	3.00	1.916	1.593
48									4.00		
49					16	.625	.812	1	3.00	2.000	1.593
50									4.00		
51		24	24	24	16	.625	.937	1	3.00	2.000	1.593
52									4.00		
53					20	.875	1.250	2	3.75	2.230	1.593
54									4.75		
55					12	.500	.750	1	3.00	1.916	1.969
56									4.00		
57					16	.625	.937	1	3.00	2.000	1.969
58			28						4.00		
59					20	.875	1.250	1	3.00	2.230	1.969
60									4.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
41	1.92	1.1875-18 UNEF	-	5.03	5.39
42	2.92			6.03	6.39
43	1.92	1.4375-18 UNEF	-	5.12	5.48
44	2.92			6.12	6.48
45	2.67	1.750-18 UNS	1.969	6.10	6.46
46	3.67			7.10	7.46
47	1.92	1.1875-18 UNEF	-	5.03	5.39
48	2.92			6.03	6.39
49	1.92	1.4375-18 UNEF	-	5.12	5.48
50	2.92			6.12	6.48
51	1.92	1.4375-18 UNEF	-	5.12	5.48
52	2.92			6.12	6.48
53	2.67	1.750-18 UNS	1.969	6.10	6.46
54	3.67			7.10	7.46
55	1.92	1.1875-18 UNEF	-	5.04	5.56
56	2.92			6.04	6.56
57	1.92	1.4375-18 UNEF	-	5.12	5.64
58	2.92			6.12	6.64
59	1.92	1.750-18 UNS	-	5.35	5.87
60	2.92			6.35	6.87

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector: MIL-C-81703 Ser 3	Fits Shell of Connector: MIL-C-26482 Ser 2	Fits Shell of Connector: MIL-C-5015 Crimp	Fits Shell of Connector: MIL-C-83723 Ser III	Clamp Size	A (see note 6) Wire Bundle Accommodation Range: Min	A (see note 6) Wire Bundle Accommodation Range: Max	Style	B ±.125	C Ref	D Dia Max
61			28		24	1.000	1.375	1	3.00	2.024	1.969
62									4.00		
63			32		16	.625	.937	1	3.00	2.000	2.219
64									4.00		
65					20	.875	1.250	1	3.00	2.230	2.219
66									4.00		
67					24	1.000	1.375	1	3.00	2.024	2.219
68									4.00		
69					28	1.250	1.625	1	3.00	2.550	2.219
70									4.00		
71			36		20	.875	1.250	1	4.00	2.230	2.469
72									5.00		
73					24	1.000	1.375	1	4.00	2.024	2.469
74									5.00		
75					28	1.250	1.625	1	4.00	2.550	2.469
76									5.00		
77					32	1.437	1.875	2	4.88	2.600	2.469
78									5.88		
79			40		20	.875	1.250	1	4.00	2.230	2.719
80									5.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
61	1.92	2.000-18 UNS	-	4.62	5.14
62	2.92			5.62	6.14
63	1.92	1.4375-18 UNEF	-	5.12	5.64
64	2.92			6.12	6.64
65	1.92	1.750-18 UNS	-	4.50	5.02
66	2.92			5.50	6.02
67	1.92	2.000-18 UNS	-	4.62	5.14
68	2.92			5.62	6.14
69	1.92	2.250-16 UN	-	4.90	5.42
70	2.92			5.90	6.42
71	2.92	1.750-18 UNS	-	5.50	6.02
72	3.92			6.50	7.02
73	2.92	2.000-18 UNS	-	5.62	6.14
74	3.92			6.62	7.14
75	2.92	2.250-16 UN	-	5.90	6.42
76	3.92			6.90	7.42
77	3.80	2.500-16 UN	2.719	6.83	7.35
78	4.80			7.83	8.35
79	2.92	1.750-18 UNS	-	5.50	6.02
80	3.92			6.50	7.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector: MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III	Clamp Size	A (see note 6) Wire Bundle Accommodation Range Min	A (see note 6) Wire Bundle Accommodation Range Max	Style	B ±.125	C Ref	D Dia Max
81			40		24	1.000	1.375	1	4.00	2.024	2.719
82									5.00		
83					28	1.250	1.625	1	4.00	2.550	2.719
84									5.00		
85					32	1.437	1.875	1	4.00	2.600	2.719
86									5.00		
87			44		20	.875	1.250	1	4.00	2.230	2.969
88									5.00		
89					24	1.000	1.375	1	4.00	2.024	2.969
90									5.00		
91					28	1.250	1.625	1	4.00	2.550	2.969
92									5.00		
93					32	1.437	1.875	1	4.00	2.600	2.969
94									5.00		
95			48		20	.875	1.250	1	4.00	2.230	3.219
96									5.00		
97					24	1.000	1.375	1	4.00	2.024	3.219
98									5.00		
99					28	1.250	1.625	1	4.00	2.550	3.219
100									5.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
81	2.92	2.000-18 UNS	-	6.14	6.66
82	3.92			7.14	7.66
83	2.92	2.250-16 UN	-	6.67	7.19
84	3.92			7.67	8.19
85	2.92	2.500-16 UN	-	6.72	7.24
86	3.92			7.72	8.24
87	2.92	1.750-18 UNS	-	6.35	6.87
88	3.92			7.35	7.87
89	2.92	2.000-18 UNS	-	6.14	6.66
90	3.92			7.14	7.66
91	2.92	2.250-16 UN	-	6.67	7.19
92	3.92			7.67	8.19
93	2.92	2.500-16 UN	-	6.72	7.24
94	3.92			7.72	8.24
95	2.92	1.750-18 UNS	-	6.35	6.87
96	3.92			7.35	7.87
97	2.92	2.000-18 UNS	-	6.14	6.66
98	3.92			7.14	7.66
99	2.92	2.250-16 UN	-	6.67	7.19
100	3.92			7.67	8.19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
101			48		32	1.437	1.875	1	4.00	2.600	3.219
102									5.00		
103	61				12	.500	.750	1	3.00	1.916	1.653
104									4.00		
105					16	.625	.937	1	3.00	2.000	1.653
106									4.00		
107					20	.875	1.250	2	3.75	2.230	1.653
108									4.75		
109					24	1.000	1.375	2	3.75	2.024	1.653
110									4.75		
111	7	12	12,12S	12	10	.350	.500	1	2.00	1.844	.858
112	19	16	16,16S	16	6	.250	.437	1	2.00	1.544	1.112
113									3.00		
114	7	12	12,12S	12	4	.125	.312	1	2.00	1.544	.858
115									3.00		
116	12	14	14,14S	14	6	.250	.437	1	2.00	1.544	.984
117									3.00		
118	19	16	16,16S	16	16	.350	.625	1	2.00	1.844	1.112
119									3.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
101	2.92	2.500-16 UN	-	6.72	7.24
102	3.92			7.72	8.24
103	1.92	1.1875-18 UNEF	-	5.03	5.39
104	2.92			6.03	6.39
105	1.92	1.4375-18 UNEF	-	5.12	5.48
106	2.92			6.12	6.48
107	2.67	1.750-18 UNS	1.969	6.10	6.46
108	3.67			7.10	7.46
109	2.67	2.000-18 UNS	1.969	5.89	6.25
110	3.67			6.89	7.25
111	1.00	1.000-20 UNEF	-	3.96	4.32
112	1.00	.750-20 UNEF	-	3.66	4.02
113	2.00			4.66	5.02
114	1.00	.625-24 UNEF	-	3.66	4.02
115	2.00			4.66	5.02
116	1.00	.750-20 UNEF	-	3.66	4.02
117	2.00			4.66	5.02
118	0.92	1.000-20 UNEF	-	3.96	4.32
119	1.92			4.96	5.32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
120	27	18	18	18	4	.125	.312	1	2.00	1.544	1.218
121									3.00		
122					6	.250	.437	1	2.00	1.544	1.218
123									3.00		
124	37	20	20	20	6	.250	.437	1	3.00	1.544	1.345
125									4.00		
126		22	22	22	4	.125	.312	1	3.00	1.544	1.468
127									4.00		
128					6	.250	.437	1	3.00	1.544	1.468
129									4.00		
130		24	24	24	10	.350	.625	1	3.00	1.844	1.593
131									4.00		
132			36		12	.500	.750	1	4.00	1.916	2.469
133									5.00		
134			40		12	.500	.750	1	4.00	1.916	2.719
135									5.00		
136		10	10S, 10SL	10	6	.250	.375	1	2.00	1.544	.734
137									3.00		
138	7	12	12,12S	12	10	.350	.500	1	2.00	1.844	.858
139									3.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
120	0.92	.625-24 UNEF	-	3.66	4.02
121	1.92			4.66	5.02
122	0.92	.750-20 UNEF	-	3.66	4.02
123	1.92			4.66	5.02
124	1.92	.750-20 UNEF	-	4.66	5.02
125	2.92			5.66	6.02
126	1.92	.625-24 UNEF	-	4.66	5.02
127	2.97			5.66	6.02
128	1.92	.750-20 UNEF	-	4.66	5.02
129	2.92			5.66	6.02
130	1.92	1.000-20 UNEF	-	4.96	5.32
131	2.92			5.96	6.32
132	2.92	1.1875-18 UNEF	-	6.04	6.56
133	3.92			7.04	7.56
134	2.92	1.1875-18 UNEF	-	6.04	6.56
135	3.92			7.04	7.56
136	1.06	.750-20 UNEF	-	3.66	4.02
137	2.06			4.66	5.02
138	1.06	1.000-20 UNEF	-	3.96	4.32
139	2.06			4.96	5.32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	C Ref	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max				
140	37	20	20	20	16	.625	.904	1	3.00	2.000	1.345
141									4.00		
142		22	22	22	20	.875	1.029	1	3.00	2.230	1.468
143									4.00		
144		24	24	24	20	.875	1.144	1	3.00	2.230	1.593
145									4.00		
146			36		32	1.437	1.840	1	4.00	2.600	2.469
147									5.00		
148					16	.625	.937	1	4.00	2.000	2.469
149									5.00		
150	12	14	14,14S	14	4	.125	.312	1	2.00	1.544	.984
151									3.00		
152	19	16	16,16S	16	4	.125	.312	1	2.00	1.544	1.112
153									3.00		
154			44		16	.625	.937	1	4.00	2.000	2.969
155									5.00		
156			40		16	.625	.937	1	4.00	2.000	2.719
157									5.00		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	E Ref	V Thread Class 2A	F Dia Max	G Max	H Max
140	1.92	1.4375-18 UNEF	-	5.12	5.48
141	2.92			6.12	6.48
142	1.92	1.750-18 UNS	-	5.35	5.71
143	2.92			6.35	6.71
144	1.92	1.750-18 UNS	-	5.35	5.71
145	2.92			6.35	6.71
146	2.92	2.500-16 UN	-	6.72	7.24
147	3.92			7.72	8.24
148	2.92	1.4375-18 UNEF	-	6.12	6.64
149	3.92			7.12	7.64
150	0.92	.625-24 UNEF	-	3.66	4.02
151	1.92			4.66	5.02
152	0.92	.625-24 UNEF	-	3.66	4.02
153	1.92			4.66	5.02
154	2.92	1.4375-18 UNEF	-	6.12	6.64
155	3.92			7.12	7.64
156	2.92	1.4375-18 UNEF	-	6.12	6.64
157	3.92			7.12	7.64

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
0.005	0.13	1.844	46.84	4.710	119.63	6.250	158.75
0.020	0.51	1.916	48.67	4.770	121.15	6.320	160.52
0.125	3.18	1.920	48.77	4.780	121.41	6.350	161.29
0.250	6.35	1.969	50.01	4.870	123.69	6.360	161.54
0.312	7.92	2.000	50.80	4.900	124.46	6.390	162.30
0.350	8.89	2.024	51.41	4.960	125.98	6.420	163.06
0.437	11.10	2.060	52.32	5.020	127.50	6.460	164.08
0.500	12.70	2.230	56.64	5.030	127.76	6.480	164.59
0.575	14.60	2.469	62.71	5.040	128.01	6.500	165.10
0.617	15.67	2.550	64.77	5.070	128.77	6.560	166.62
0.625	15.88	2.600	66.04	5.120	130.04	6.620	168.14
0.669	16.99	2.670	67.82	5.140	130.55	6.640	168.65
0.700	17.78	2.719	69.06	5.230	132.84	6.660	169.16
0.734	18.64	2.750	69.85	5.320	135.12	6.670	169.41
0.750	19.05	2.810	71.37	5.350	135.89	6.710	170.43
0.812	20.62	2.870	72.90	5.360	136.14	6.720	170.68
0.858	21.79	2.920	74.17	5.390	136.90	6.830	173.48
0.875	22.22	2.969	75.41	5.410	137.41	6.870	174.49
0.904	22.96	2.970	75.44	5.420	137.66	6.890	175.00
0.920	23.37	3.000	76.20	5.480	139.19	7.020	178.30
0.937	23.80	3.030	76.96	5.500	139.70	7.040	178.81
0.984	24.99	3.219	81.76	5.560	141.22	7.100	180.34
1.000	25.40	3.660	92.96	5.620	142.74	7.120	180.84
1.029	26.14	3.670	93.22	5.640	143.25	7.140	181.35
1.060	26.92	3.690	93.72	5.660	143.76	7.190	182.62
1.112	28.24	3.750	95.25	5.710	145.03	7.230	183.64
1.144	29.06	3.800	96.52	5.760	146.30	7.240	183.89
1.1875	30.16	3.920	99.57	5.770	146.55	7.250	184.15
1.218	30.94	3.960	100.58	5.780	146.81	7.350	186.69
1.250	31.75	4.000	101.60	5.870	149.09	7.420	188.46
1.345	34.16	4.020	102.10	5.890	149.60	7.460	189.48
1.437	36.50	4.030	102.36	5.900	149.86	7.560	192.02
1.4375	36.51	4.320	109.72	5.960	151.38	7.640	194.05
1.468	37.29	4.350	110.49	6.020	152.90	7.660	194.56
1.544	39.22	4.390	111.50	6.030	153.16	7.670	194.81
1.593	40.46	4.410	112.01	6.040	153.41	7.720	196.08
1.653	41.99	4.440	112.77	6.070	154.17	7.830	198.88
1.670	42.42	4.500	114.30	6.100	154.94	7.870	199.89
1.750	44.45	4.620	117.34	6.120	155.44	8.190	208.02
1.810	45.97	4.666	118.51	6.140	155.95	8.240	209.29
1.840	46.74	4.690	119.12	6.230	158.24	8.350	212.09

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction:

   a. Dimensions and configuration: See figure 1 and table I.

   b. Interface dimensions shall conform to MIL-C-85049 figure 4.

   c. Figure 1 consists of a coupling nut and follower. The coupling nut shall be captivated to and free to rotate on the follower.

2. Material and finish:

   a. Accessory components shall be as shown in table II.

   b. Grommet and O-Ring - Grommet and o-ring elastomer material shall be in accordance with MIL-C-85049.

   c. Clamp assembly screws - Corrosion resistant steel in accordance with MIL-C-85049, passivated per QQ-P-35.

3. Qualification: See MIL-C-85049, category 1A. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.


4. Applications:

   a. These accessories are for shield termination and environmental applications. Armor shield termination and environmental applications may be achieved by reversing the ferrules and grommets.


   b. Style 2 applies when the cable diameter exceeds the "E" diameter of the interface dimensions defined in MIL-C-85049 figure 4.

   c. For assembly instructions see figure 2.


5. Part Number: See example below:

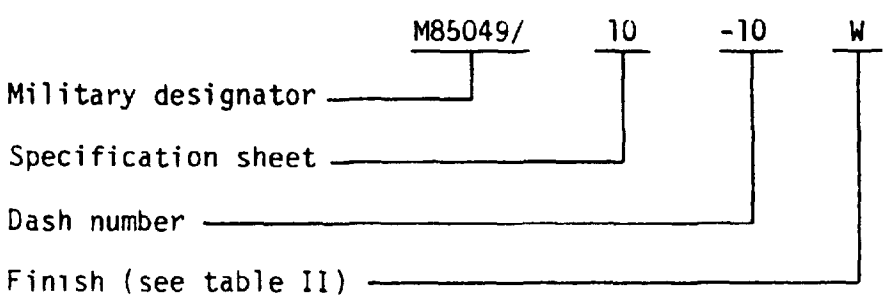


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

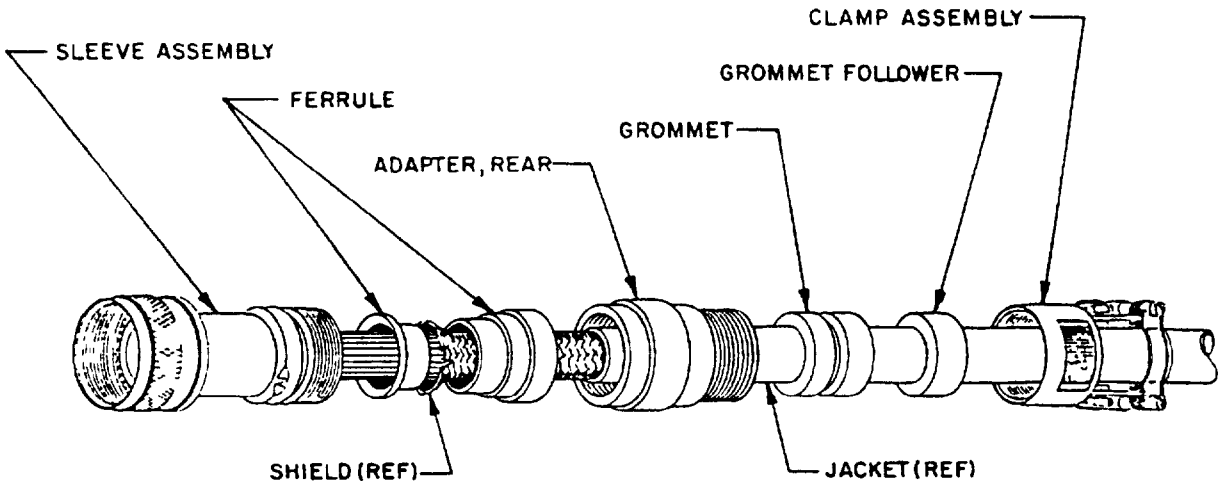

STYLE 1
SHIELD, ENVIRONMENTAL

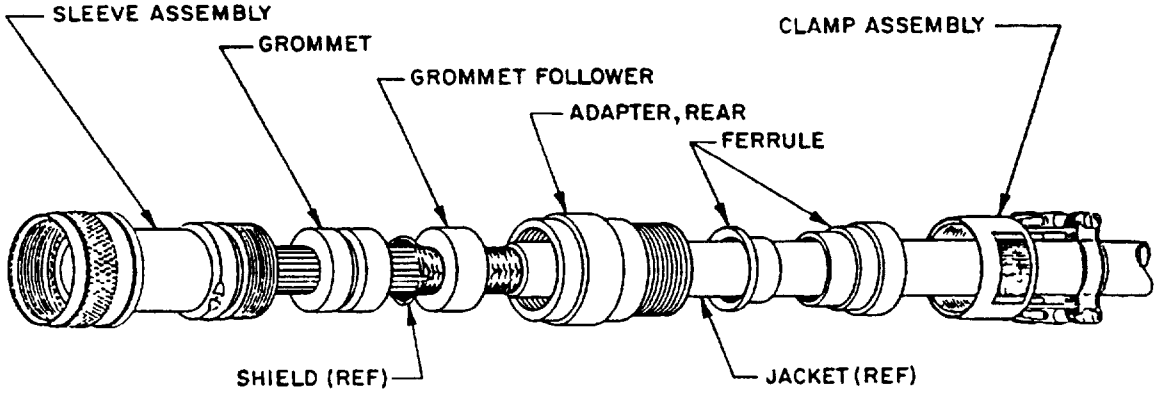

STYLE 1
ARMOR, ENVIRONMENTAL

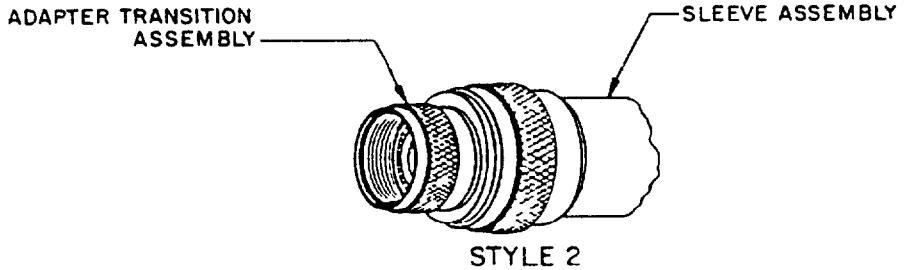

STYLE 2
(SEE APPLICATION REQUIREMENT 4, B)

FIGURE 2. Assembly instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

6. Supersession data:

MS3437A * * M85049/10 - * *

Dash Number

Finish

Old	New
A	W
C	W
N	N
D	B
S	S

TABLE II. Material and finish.

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	1/ N, 2/ W
Body	Corrosion resistant steel in accordance with MIL-C-85049	B, S

1/ Not for Navy use. Restricted to Air Force Space applications only.
2/ W finish is not for use in space application.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents shall be based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Dimensions apply after plating.
5. Loosely assembled is defined as the MIL-C-85049/42 clamp tightened to the MIL-C-85049/10 connector accessory body a minimum of two full thread lengths.
6. "Wire bundle accommodation range" dimension is defined as the envelope area for the wire bundle. This dimension is not meant to define the clamp hardware limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.