INCH-POUND


MIL-C-85049/25A
30 November 1990
SUPERSEDING
MIL-C-85049/25
16 January 1980
MS3437D
10 May 1982

MILITARY SPECIFICATION SHEET


CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NONENVIRONMENTAL, STRAIGHT, SHIELD TERMINATION, CATEGORY 3A (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

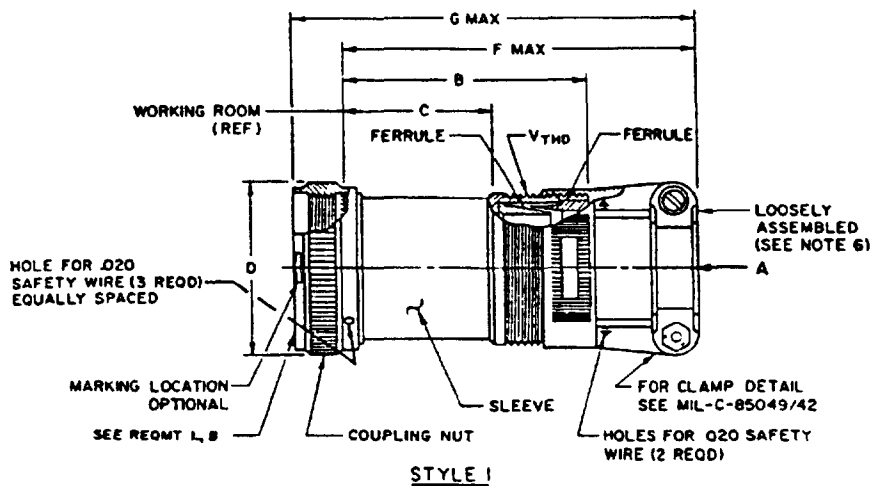

STYLE 1

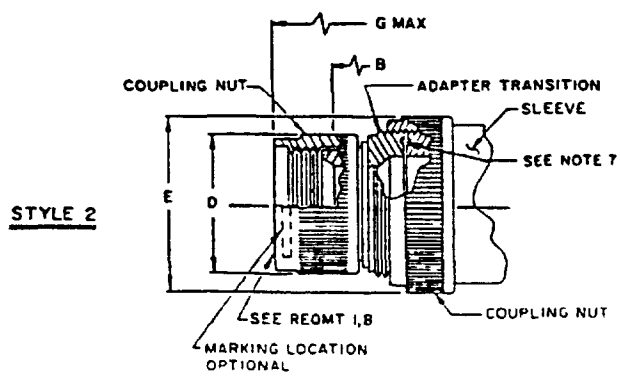

STYLE 2

FIGURE 1. Configuration and dimensions.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
01	3				4	.125	.250	1	2.00	.669
02									3.00	
03					6	.250	.437	2	2.75	.669
04									3.75	
05		8	8S	8	4	.125	.250	1	2.00	.617
06									3.00	
07					6	.250	.437	2	2.75	.617
08									3.75	
09		10	10S, 10SL	10	4	.125	.312	1	2.00	.734
10									3.00	
11					6	.250	.437	2	2.75	.734
12									3.75	
13	7	12	12, 12S	12	6	.250	.437	1	2.00	.858
14									3.00	
15					10	.350	.625	2	2.75	.858
16									3.75	
17	12	14	14, 14S	14	10	.350	.575	1	2.00	.984
18									3.00	
19					12	.500	.750	2	2.75	.984
20									3.75	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
01	1.06	.625-24 UNEF	-	3.15	3.51
02	2.06			4.15	4.51
03	1.81	.750-20 UNEF	.858	3.90	4.26
04	2.81			4.90	5.26
05	1.06	.625-24 UNEF	-	3.15	3.51
06	2.06			4.15	4.51
07	1.81	.750-20 UNEF	.858	3.90	4.26
08	2.81			4.90	5.26
09	1.06	.625-24 UNEF	-	3.15	3.51
10	2.06			4.15	4.51
11	1.81	.750-20 UNEF	.858	3.90	4.26
12	2.81			4.90	5.26
13	1.06	.750-20 UNEF	-	3.15	3.51
14	2.06			4.15	4.51
15	1.67	1.000-20 UNEF	1.112	3.90	4.26
16	2.67			4.90	5.26
17	0.92	1.000-20 UNEF	-	3.15	3.51
18	1.92			4.15	4.51
19	1.67	1.1875-18 UNEF	1.218	3.93	4.29
20	2.67			5.04	5.29

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
21	19	16	16,16S	16	12	.500	.700	1	2.00	1.112
22									3.00	
23					16	.625	.937	2	2.75	1.112
24									3.75	
25	27	18	18	18	10	.350	.625	1	2.00	1.218
26									3.00	
27					12	.500	.750	1	2.00	1.218
28									3.00	
29					16	.625	.937	2	2.75	1.218
30									3.70	
31	37	20	20	20	10	.350	.625	1	3.00	1.345
32									4.00	
33					12	.500	.750	1	3.00	1.345
34									4.00	
35					16	.625	.937	2	3.75	1.345
36									4.75	
37					20	.875	1.250	2	3.75	1.345
38									4.75	
39		22	22	22	10	.350	.625	1	3.00	1.468
40									4.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
21	0.92	1.1875-18 UNEF	-	3.18	3.54
22	1.92			4.18	4.54
23	1.67	1.4375-18 UNEF	1.468	4.02	4.38
24	2.67			5.02	5.38
25	0.92	1.000-20 UNEF	-	3.15	3.51
26	1.92			4.15	4.51
27	0.92	1.1875-18 UNEF	-	3.18	3.54
28	1.92			4.18	4.54
29	1.67	1.4375-18 UNEF	1.468	4.02	4.38
30	2.67			5.02	5.38
31	1.92	1.000-20 UNEF	-	4.15	4.51
32	2.92			5.15	5.51
33	1.92	1.1875-18 UNEF	-	4.18	4.54
34	2.92			5.18	5.54
35	2.67	1.4375-18 UNEF	1.468	5.02	5.38
36	3.67			6.02	6.38
37	2.67	1.750-18 UNS	1.969	5.24	5.60
38	3.67			6.24	6.60
39	1.92	1.000-20 UNEF	-	4.15	4.51
40	2.92			5.15	5.51

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
41		22	22	22	12	.500	.750	1	3.00	1.468
42									4.00	
43					16	.625	.937	1	3.00	1.468
44									4.00	
45					20	.875	1.250	2	3.75	1.468
46									4.75	
47		24	24	24	12	.500	.750	1	3.00	1.593
48									4.00	
49					16	.625	.812	1	3.00	1.593
50									4.00	
51					16	.625	.937	1	3.00	1.593
52									4.00	
53					20	.875	1.250	2	3.75	1.593
54									4.75	
55			28		12	.500	.750	1	3.00	1.969
56									4.00	
57					16	.625	.937	1	3.00	1.969
58									4.00	
59					20	.875	1.250	1	3.00	1.969
60									4.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
41	1.92	1.1875-18 UNEF	-	4.18	4.54
42	2.92			5.18	5.54
43	1.92	1.4375-18 UNEF	-	4.27	4.63
44	2.92			5.27	5.63
45	2.67	1.750-18 UNS	1.969	5.24	5.60
46	3.67			6.24	6.60
47	1.92	1.1875-18 UNEF	-	4.18	4.54
48	2.92			5.18	5.54
49	1.92	1.4375-18 UNEF	-	4.27	4.63
50	2.92			5.27	5.63
51	1.92	1.4375-18 UNEF	-	4.27	4.63
52	2.92			5.27	5.63
53	2.67	1.750-18 UNS	1.969	5.24	5.60
54	3.67			6.24	6.60
55	1.92	1.1875-18 UNEF	-	4.16	4.68
56	2.92			5.16	5.68
57	1.92	1.4375-18 UNEF	-	4.26	4.78
58	2.92			5.26	5.78
59	1.92	1.750-18 UNS	-	4.48	5.00
60	2.92			5.48	6.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
61			28		24	1.000	1.375	1	3.00	1.969
62									4.00	
63			32		16	.625	.937	1	3.00	2.219
64									4.00	
65					20	.875	1.250	1	3.00	2.219
66									4.00	
67					24	1.000	1.375	1	3.00	2.219
68									4.00	
69					28	1.250	1.625	1	3.00	2.219
70									4.00	
71			36		20	.875	1.250	1	4.00	2.469
72									5.00	
73					24	1.000	1.375	1	4.00	2.469
74									5.00	
75					28	1.250	1.625	1	4.00	2.469
76									5.00	
77					32	1.437	1.875	2	4.88	2.469
78									5.88	
79			40		20	.875	1.250	1	4.00	2.719
80									5.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
61	1.92	2.000-18 UNS	-	4.60	5.12
62	2.92			5.60	6.12
63	1.92	1.4375-18 UNEF	-	4.26	4.78
64	2.92			5.26	5.78
65	1.92	1.750-18 UNS	-	4.48	5.00
66	2.92			5.48	6.00
67	1.92	2.000-18 UNS	-	4.60	5.12
68	2.92			5.60	6.12
69	1.92	2.250-16 UN	-	4.89	5.41
70	2.92			5.89	6.41
71	2.92	1.750-18 UNS	-	5.49	6.01
72	3.92			6.49	7.01
73	2.92	2.000-18 UNS	-	5.60	6.12
74	3.92			6.60	7.12
75	2.92	2.250-16 UN	-	5.89	6.41
76	3.92			6.89	7.41
77	3.80	2.500-16 UN	2.719	6.81	7.33
78	4.80			7.81	8.33
79	2.92	1.750-18 UNS	-	5.48	6.00
80	3.92			6.48	7.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
81			40		24	1.000	1.375	1	4.00	2.719
82									5.00	
83					28	1.250	1.625	1	4.00	2.719
84									5.00	
85					32	1.437	1.875	1	4.00	2.719
86									5.00	
87			44		20	.875	1.250	1	4.00	2.969
88									5.00	
89					24	1.000	1.375	1	4.00	2.969
90									5.00	
91					28	1.250	1.625	1	4.00	2.969
92									5.00	
93					32	1.437	1.875	1	4.00	2.969
94									5.00	
95			48		20	.875	1.250	1	4.00	3.219
96									5.00	
97					24	1.000	1.375	1	4.00	3.219
98									5.00	
99					28	1.250	1.625	1	4.00	3.219
100									5.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
81	2.92	2.000-18 UNS	-	5.60	6.12
82	3.92			6.60	7.12
83	2.92	2.250-16 UN	-	5.89	6.41
84	3.92			6.89	7.41
85	2.92	2.500-16 UN	-	5.93	6.45
86	3.92			6.93	7.45
87	2.92	1.750-18 UNS	-	5.48	6.00
88	3.92			6.48	7.00
89	2.92	2.000-18 UNS	-	5.60	6.12
90	3.92			6.60	7.12
91	2.92	2.250-16 UN	-	5.89	6.41
92	3.92			6.89	7.41
93	2.92	2.500-16 UN	-	5.93	6.45
94	3.92			6.93	7.45
95	2.92	1.750-18 UNS	-	5.48	6.00
96	3.92			6.48	7.00
97	2.92	2.000-18 UNS	-	5.60	6.12
98	3.92			6.60	7.12
99	2.92	2.250-16 UN	-	5.89	6.41
100	3.92			6.89	7.41

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
101			48		32	1.437	1.875	1	4.00	3.219
102									5.00	
103	61				12	.500	.750	1	3.00	1.653
104									4.00	
105					16	.625	.937	1	3.00	1.653
106									4.00	
107					20	.875	1.250	2	3.75	1.653
108									4.75	
109					24	1.000	1.375	2	3.75	1.653
110									4.75	
111	7	12	12,12S	12	10	.350	.500	1	2.00	.858
112	19	16	16,16S	16	6	.250	.437	1	2.00	1.112
113									3.00	
114	7	12	12,12S	12	4	.125	.312	1	2.00	.858
115									3.00	
116	12	14	14,14S	14	6	.250	.437	1	2.00	.984
117									3.00	
118	19	16	16,16S	16	10	.350	.625	1	2.00	1.112
119									3.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
101	2.92	2.500-16 UN	-	5.93	6.45
102	3.92			6.93	7.45
103	1.92	1.1875-18 UNEF	-	4.18	4.54
104	2.92			5.18	5.54
105	1.92	1.4375-18 UNEF	-	4.27	4.63
106	2.92			5.27	5.63
107	2.67	1.750-18 UNS	1.969	5.24	5.60
108	3.67			6.24	6.60
109	2.67	2.000-18 UNS	1.969	5.37	5.73
110	3.67			6.37	6.73
111	1.00	1.000-20 UNEF	-	3.15	3.51
112	1.00	.750-20 UNEF	-	3.15	3.51
113	2.00			4.15	4.51
114	1.00	.625-24 UNEF	-	3.15	3.51
115	2.00			4.15	4.51
116	1.00	.750-20 UNEF	-	3.15	3.51
117	2.00			4.15	4.51
118	0.92	1.000-20 UNEF	-	3.15	3.51
119	1.92			4.15	4.51

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:11Z
Check the source to verify that this is the currentversion before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
120	27	18	18	18	4	.125	.312	1	2.00	1.218
121									3.00	
122					6	.250	.437	1	2.00	1.218
123									3.00	
124	37	20	20	20	6	.250	.437	1	3.00	1.345
125									4.00	
126		22	22	22	4	.125	.312	1	3.00	1.468
127									4.00	
128					6	.250	.437	1	3.00	1.468
129									4.00	
130		24	24	24	10	.350	.625	1	3.00	1.593
131									4.00	
132			36		12	.500	.750	1	4.00	2.469
133									5.00	
134			40		12	.500	.750	1	4.00	2.719
135									5.00	
136		10	10S, 10SL	10	6	.250	.375	1	2.00	.734
137									3.00	
138	7	12	12, 12S	12	10	.350	.500	1	2.00	.858
139									3.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
120	0.92	.625-24 UNEF	-	3.15	3.51
121	1.92			4.15	4.51
122	0.92	.750-20 UNEF	-	3.15	3.51
123	1.92			4.15	4.51
124	1.92	.750-20 UNEF	-	4.15	4.51
125	2.92			5.15	5.51
126	1.92	.625-24 UNEF	-	4.15	4.51
127	2.97			5.15	5.51
128	1.92	.750-20 UNEF	-	4.15	4.51
129	2.92			5.15	5.51
130	1.92	1.000-20 UNEF	-	4.15	4.51
131	2.92			5.15	5.51
132	2.92	1.1875-18 UNEF	-	5.32	5.68
133	3.92			6.32	6.68
134	2.92	1.1875-18 UNEF	-	5.16	5.68
135	3.92.			6.16	6.68
136	1.06	.750-20 UNEF	-	3.15	3.51
137	2.06			4.15	4.51
138	1.06	1.000-20 UNEF	-	3.15	3.51
139	2.06			4.15	4.51

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	Fits Shell of Connector				Clamp Size	A (see note 6) Wire Bundle Accommodation Range		Style	B ±.125	D Dia Max
	MIL-C-81703 Ser 3	MIL-C-26482 Ser 2	MIL-C-5015 Crimp	MIL-C-83723 Ser III		Min	Max			
140	37	20	20	20	16	.625	.904	1	3.00	1.345
141									4.00	
142		22	22	22	20	.875	1.029	1	3.00	1.468
143									4.00	
144		24	24	24	20	.875	1.144	1	3.00	1.593
145									4.00	
146			36		32	1.437	1.840	1	4.00	2.469
147									5.00	
148					16	.625	.937	1	4.00	2.469
149									5.00	
150	12	14	14,14S	14	4	.125	.312	1	2.00	.984
151									3.00	
152	19	16	16,16S	16	4	.125	.312	1	2.00	1.112
153									3.00	
154			44		16	.625	.937	1	4.00	2.969
155									5.00	
156			40		16	.625	.937	1	4.00	2.719
157									5.00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (continued).

Dash No.	C Ref	V Thread Class 2A	E Dia Max	F Max	G Max
140	1.92	1.4375-18 UNEF	-	4.27	4.63
141	2.92			5.27	5.63
142	1.92	1.750-18 UNS	-	4.49	4.85
143	2.92			5.49	5.85
144	1.92	1.750-18 UNS	-	4.49	4.85
145	2.92			5.49	5.85
146	2.92	2.500-16 UN	-	5.93	6.45
147	3.92			6.93	7.45
148	2.92	1.4375-18 UNEF	-	5.26	5.78
149	3.92			6.26	6.78
150	0.92	.625-24 UNEF	-	3.15	3.51
151	1.92			4.15	4.51
152	0.92	.625-24 UNEF	-	3.15	3.51
153	1.92			4.15	4.51
154	2.92	1.4375-18 UNEF	-	5.26	5.78
155	3.92			6.26	6.78
156	2.92	1.4375-18 UNEF	-	5.26	5.78
157	3.92			6.26	6.78

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
.005	0.120	1.653	41.98	4.150	105.41	5.540	140.71
.020	0.500	1.670	42.41	4.160	105.66	5.600	142.24
.125	3.170	1.750	44.45	4.180	106.17	5.630	143.00
.250	6.350	1.810	45.97	4.260	108.20	5.680	144.27
.312	7.920	1.840	46.73	4.270	108.45	5.730	145.54
.350	8.890	1.875	47.62	4.280	108.71	5.780	146.81
.375	9.320	1.920	48.76	4.290	108.96	5.850	148.59
.437	11.09	1.969	50.01	4.380	111.25	5.895	149.73
.500	12.70	2.000	50.80	4.510	114.55	5.930	150.62
.575	14.60	2.060	52.32	4.490	114.04	6.000	152.40
.617	15.67	2.190	55.62	4.540	115.31	6.010	152.65
.625	15.87	2.219	56.36	4.600	116.84	6.020	152.90
.669	16.99	2.250	57.15	4.630	117.60	6.120	155.44
.700	17.78	2.469	62.71	4.680	118.87	6.160	156.46
.734	18.64	2.500	63.50	4.750	120.65	6.240	158.49
.750	19.05	2.670	67.81	4.780	121.41	6.260	159.00
.812	20.62	2.719	69.06	4.850	123.19	6.320	160.52
.858	21.75	2.750	69.85	4.890	124.20	6.370	161.79
.875	22.22	2.810	71.37	4.900	124.46	6.410	162.81
.904	22.96	2.900	73.66	5.000	127.00	6.450	163.83
.924	23.46	2.920	74.16	5.120	130.04	6.480	164.59
.937	23.79	2.969	75.41	5.150	130.81	6.490	164.84
.984	24.99	2.970	75.43	5.020	127.50	6.600	167.64
1.000	25.40	3.000	76.20	5.045	128.14	6.680	169.67
1.029	26.13	3.150	80.01	5.160	131.06	6.730	170.94
1.060	26.92	3.180	80.77	5.180	131.57	6.780	172.21
1.112	28.24	3.219	81.76	5.190	131.82	6.810	172.97
1.138	28.90	3.510	89.15	5.240	133.09	6.890	175.00
1.144	29.05	3.540	89.91	5.260	133.60	6.930	176.02
1.188	30.17	3.670	93.21	5.270	133.85	7.000	177.80
1.218	30.93	3.700	93.98	5.320	135.12	7.010	178.05
1.250	31.75	3.750	95.25	5.370	136.39	7.120	180.84
1.345	34.16	3.80	96.52	5.380	136.65	7.330	186.18
1.375	34.92	3.900	99.06	5.410	137.41	7.410	188.21
1.438	36.52	3.920	99.56	5.480	139.19	7.450	189.23
1.468	37.28	3.930	99.82	5.490	139.44	7.810	198.37
1.593	40.46	4.000	101.60	5.510	139.95	8.230	209.04
1.625	41.27	4.020	102.10				

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction:

   a. Dimensions and configuration: See figure 1 and table I.

   b. Interface dimensions shall conform to MIL-C-85049 figure 4.

   c. Figure 1 consists of a coupling nut and follower. The coupling nut shall be captivated to and free to rotate on the follower.

2. Material and finish:

   a. Accessory components shall be as shown in table II.

   b. Clamp assembly screws - Corrosion resistant steel in accordance with MIL-C-85049, passivated per QQ-P-35.

3. Qualification: See MIL-C-85049, category 3A. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.


4. Applications:

   a. These accessories are for shield termination applications.


   b. Style 2 applies when the cable diameter exceeds the "E" diameter of the interface dimensions defined in MIL-C-85049 figure 4.

   c. For assembly instructions see figure 2.


5. Part Number. See example below:

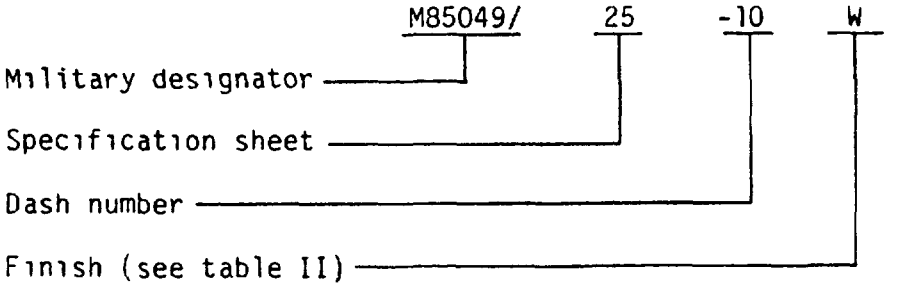

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:11Z
Check the source to verify that this is the current version before use.

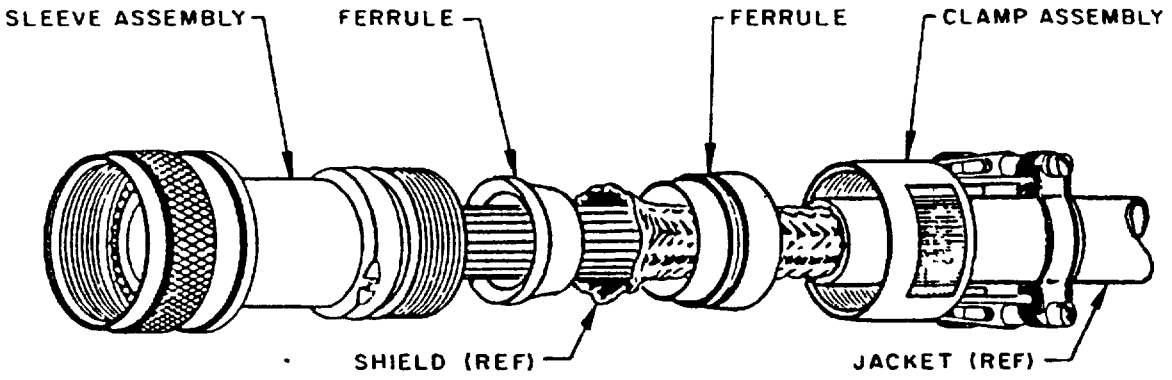

STYLE 1
SHIELD

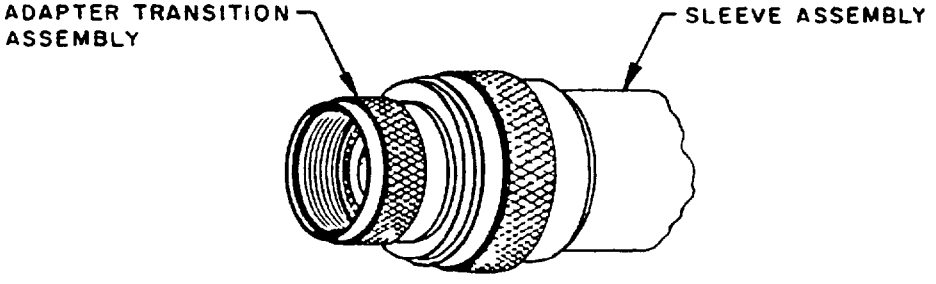

STYLE 2
(SEE APLICATION REQUIREMENT 4 , B)

FIGURE 2. Assembly instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

6. Supersession data:

MS3437C * * M85049/25 - * *

Dash Number

Finish

Old	New
A	W
C	W
N	N
D	B
S	S

TABLE II. Material and finish.

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	1/ N, 2/ W
Body	Corrosion resistant steel in accordance with MIL-C-85049	B, S

1/ Not for Navy use. Restricted to Air Force Space applications only.
2/ W finish is not for use in space application.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents shall be based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.
3. Unless otherwise specified, tolerance is ±.005 for three place decimals and ±.02 for two place decimals.
4. Dimensions apply after plating.
5. Loosely assembled is defined as the MIL-C-85049/42 clamp tightened to the MIL-C-85049/25 connector accessory body a minimum of two full thread lengths.
6. "Wire bundle accommodation range" dimension is defined as the envelope area for the wire bundle. This dimension is not meant to define the clamp hardware limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

7. O-ring is not supplied with style 2.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.