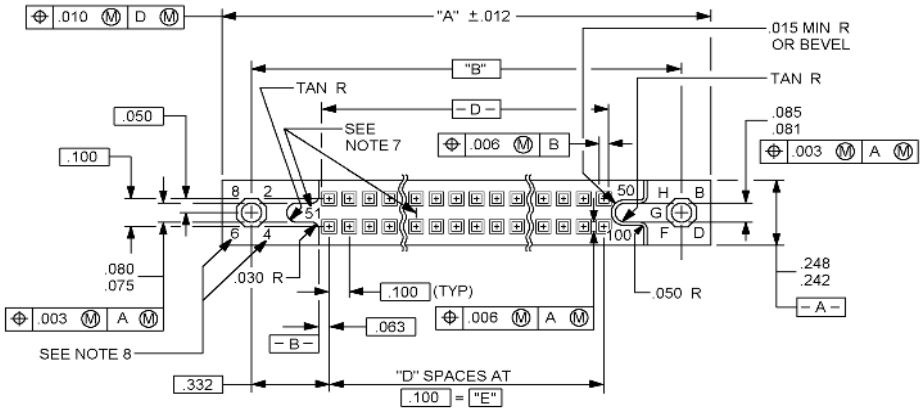
INCH-POUND
MIL-DTL-55302/27K
w/AMENDMENT 2
1 June 2022
SUPERSEDING
MIL-DTL-55302/27K
w/AMENDMENT 1
10 July 2017

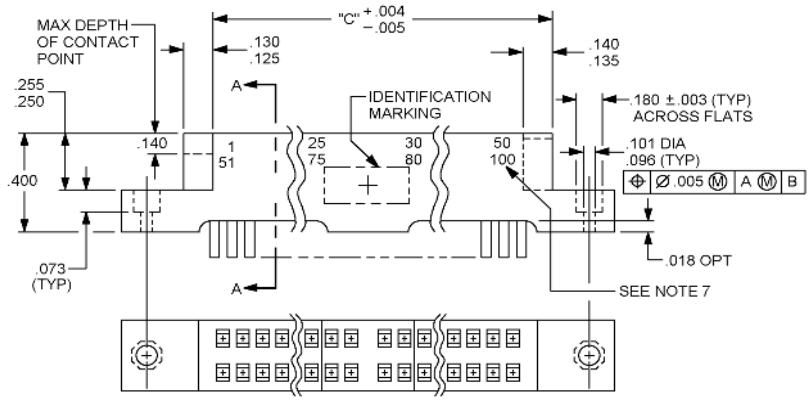
DETAIL SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, 30 thru 140 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.




STYLE 2 (EXTERNAL KEYING)

Style 1 (internal keying) connectors are hereby canceled and superseded by style 2 (external keying) connectors, see table I for supersession data.

FIGURE 1. Connectors, plug, .100 (2.54 mm) square grid.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

| Dash 1/ numbers | Number of contacts | Type | Dimensions | | | | | Contact identification numbers |
|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | |
| 91 | 30 | I | 2.355 | 2.065 | 1.665 | 14 | 1.400 | 1 - 15 |
| 100 | 30 | II | (59.82) | (52.45) | (42.29) | | (35.56) | 16 - 30 |
| 109 | 30 | III | | | | | | |
| 118 | 30 | VI | | | | | | |
| 127 | 30 | VI | | | | | | |
| 136 | 30 | VI | | | | | | |
| 145 | 30 | V | | | | | | |
| 154 | 30 | V | | | | | | |
| 163 | 30 | V | | | | | | |
| 172 | 30 | IV | | | | | | |
| 92 | 40 | I | 2.855 | 2.565 | 2.165 | 19 | 1.900 | 1 - 20 |
| 101 | 40 | II | (72.52) | (65.15) | (54.99) | | (48.26) | 21 - 40 |
| 110 | 40 | III | | | | | | |
| 119 | 40 | VI | | | | | | |
| 127 | 40 | VI | | | | | | |
| 137 | 40 | VI | | | | | | |
| 146 | 40 | V | | | | | | |
| 155 | 40 | V | | | | | | |
| 164 | 40 | V | | | | | | |
| 173 | 40 | IV | | | | | | |
| 93 | 50 | I | 3.355 | 3.065 | 2.665 | 24 | 2.400 | 1 - 25 |
| 102 | 50 | II | (85.22) | (77.85) | (67.69) | | (60.96) | 26 - 50 |
| 111 | 50 | III | | | | | | |
| 120 | 50 | VI | | | | | | |
| 129 | 50 | VI | | | | | | |
| 138 | 50 | VI | | | | | | |
| 147 | 50 | V | | | | | | |
| 156 | 50 | V | | | | | | |
| 165 | 50 | V | | | | | | |
| 174 | 50 | IV | | | | | | |
| 94 | 60 | I | 3.855 | 3.565 | 3.165 | 29 | 2.900 | 1 - 30 |
| 103 | 60 | II | (97.92) | (90.55) | (80.39) | | (73.66) | 31 - 60 |
| 112 | 60 | III | | | | | | |
| 121 | 60 | VI | | | | | | |
| 130 | 60 | VI | | | | | | |
| 139 | 60 | VI | | | | | | |
| 148 | 60 | V | | | | | | |
| 157 | 60 | V | | | | | | |
| 166 | 60 | V | | | | | | |
| 175 | 60 | IV | | | | | | |
| 95 | 70 | I | 4.355 | 4.065 | 3.665 | 34 | 3.400 | 1 - 35 |
| 104 | 70 | II | (110.62) | (103.25) | (93.09) | | (86.36) | 36 - 70 |
| 113 | 70 | III | | | | | | |
| 122 | 70 | VI | | | | | | |
| 131 | 70 | VI | | | | | | |
| 140 | 70 | VI | | | | | | |
| 149 | 70 | V | | | | | | |
| 158 | 70 | V | | | | | | |
| 167 | 70 | V | | | | | | |
| 176 | 70 | IV | | | | | | |

See footnote at end of table.

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

| Dash 1/ numbers | Number of contacts | Type | Dimensions | | | | | Post length type | Contact identification numbers |
|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | |
| 96 | 80 | I | 4.855 | 4.565 | 4.165 | 39 | 3.900 | N/A | 1 - 40 |
| 105 | 80 | II | (123.32) | (115.95) | (105.79) | | (99.06) | N/A | 41 - 80 |
| 114 | 80 | III | | | | | | N/A | |
| 123 | 80 | VI | | | | | | 3 | |
| 132 | 80 | VI | | | | | | 2 | |
| 141 | 80 | VI | | | | | | 1 | |
| 150 | 80 | V | | | | | | 3 | |
| 159 | 80 | V | | | | | | 2 | |
| 168 | 80 | V | | | | | | 1 | |
| 177 | 80 | IV | | | | | | N/A | |
| 97 | 90 | I | 5.355 | 5.065 | 4.665 | 44 | 4.400 | N/A | 1 - 45 |
| 106 | 90 | II | (136.02) | (128.65) | (118.49) | | (111.76) | N/A | 46 - 90 |
| 115 | 90 | III | | | | | | N/A | |
| 124 | 90 | VI | | | | | | 3 | |
| 133 | 90 | VI | | | | | | 2 | |
| 142 | 90 | VI | | | | | | 1 | |
| 151 | 90 | V | | | | | | 3 | |
| 160 | 90 | V | | | | | | 2 | |
| 169 | 90 | V | | | | | | 1 | |
| 178 | 90 | IV | | | | | | N/A | |
| 98 | 100 | I | 5.855 | 5.565 | 5.165 | 49 | 4.900 | N/A | 1 - 50 |
| 107 | 100 | II | (148.72) | (141.35) | (131.19) | | (124.46) | N/A | 51 - 100 |
| 116 | 100 | III | | | | | | N/A | |
| 125 | 100 | VI | | | | | | 3 | |
| 134 | 100 | VI | | | | | | 2 | |
| 143 | 100 | VI | | | | | | 1 | |
| 152 | 100 | V | | | | | | 3 | |
| 161 | 100 | V | | | | | | 2 | |
| 170 | 100 | V | | | | | | 1 | |
| 179 | 100 | IV | | | | | | N/A | |
| 99 | 110 | I | 6.355 | 6.065 | 5.665 | 54 | 5.400 | N/A | 1 - 55 |
| 108 | 110 | II | (161.42) | (154.05) | (143.89) | | (137.16) | N/A | 56 - 110 |
| 117 | 110 | III | | | | | | N/A | |
| 126 | 110 | VI | | | | | | 3 | |
| 135 | 110 | VI | | | | | | 2 | |
| 144 | 110 | VI | | | | | | 1 | |
| 153 | 110 | V | | | | | | 3 | |
| 162 | 110 | V | | | | | | 2 | |
| 171 | 110 | V | | | | | | 1 | |
| 180 | 110 | IV | | | | | | N/A | |

See footnote at end of table.

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

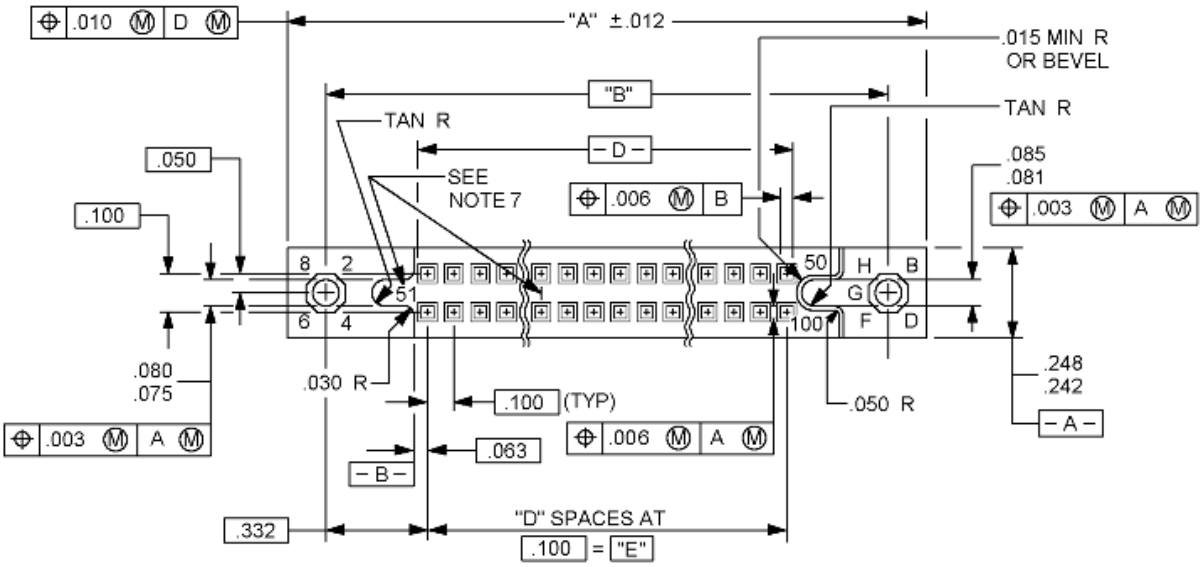
| Dash 1/ numbers | Number of contacts | Type | Dimensions | | | | | Post length type | Contact identification numbers |
|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | |
| 190 | 120 | I | 6.855 | 5.565 | 6.162 | 59 | 5.900 | N/A | 1 - 60 |
| 194 | 120 | II | (174.12) | (141.35) | (156.51) | | (149.86) | N/A | 61 - 120 |
| 198 | 120 | III | | | | | | N/A | |
| 202 | 120 | VI | | | | | | 3 | |
| 206 | 120 | VI | | | | | | 2 | |
| 210 | 120 | VI | | | | | | 1 | |
| 214 | 120 | V | | | | | | 3 | |
| 218 | 120 | V | | | | | | 2 | |
| 222 | 120 | V | | | | | | 1 | |
| 226 | 120 | IV | | | | | | N/A | |
| 191 | 130 | I | 7.355 | 7.065 | 6.665 | 64 | 6.400 | N/A | 1 - 65 |
| 195 | 130 | II | (186.82) | (179.45) | (169.30) | | (162.56) | N/A | 66 - 130 |
| 199 | 130 | III | | | | | | N/A | |
| 203 | 130 | VI | | | | | | 3 | |
| 207 | 130 | VI | | | | | | 2 | |
| 211 | 130 | VI | | | | | | 1 | |
| 214 | 130 | V | | | | | | 3 | |
| 219 | 130 | V | | | | | | 2 | |
| 223 | 130 | V | | | | | | 1 | |
| 227 | 130 | IV | | | | | | N/A | |
| 192 | 134 | I | 7.555 | 7.265 | 6.865 | 66 | 6.600 | N/A | 1 - 67 |
| 196 | 134 | II | (191.90) | (184.53) | (174.37) | | (167.64) | N/A | 68 - 134 |
| 200 | 134 | III | | | | | | N/A | |
| 204 | 134 | VI | | | | | | 3 | |
| 208 | 134 | VI | | | | | | 2 | |
| 212 | 134 | VI | | | | | | 1 | |
| 216 | 134 | V | | | | | | 3 | |
| 220 | 134 | V | | | | | | 2 | |
| 224 | 134 | V | | | | | | 1 | |
| 228 | 134 | IV | | | | | | N/A | |
| 193 | 140 | I | 7.855 | 7.565 | 7.165 | 69 | 6.900 | N/A | 1 - 70 |
| 197 | 140 | II | (199.52) | (192.15) | (181.99) | | (175.26) | N/A | 71 - 140 |
| 201 | 140 | III | | | | | | N/A | |
| 205 | 140 | VI | | | | | | 3 | |
| 209 | 140 | VI | | | | | | 2 | |
| 213 | 140 | VI | | | | | | 1 | |
| 217 | 140 | V | | | | | | 3 | |
| 221 | 140 | V | | | | | | 2 | |
| 225 | 140 | V | | | | | | 1 | |
| 229 | 140 | IV | | | | | | N/A | |

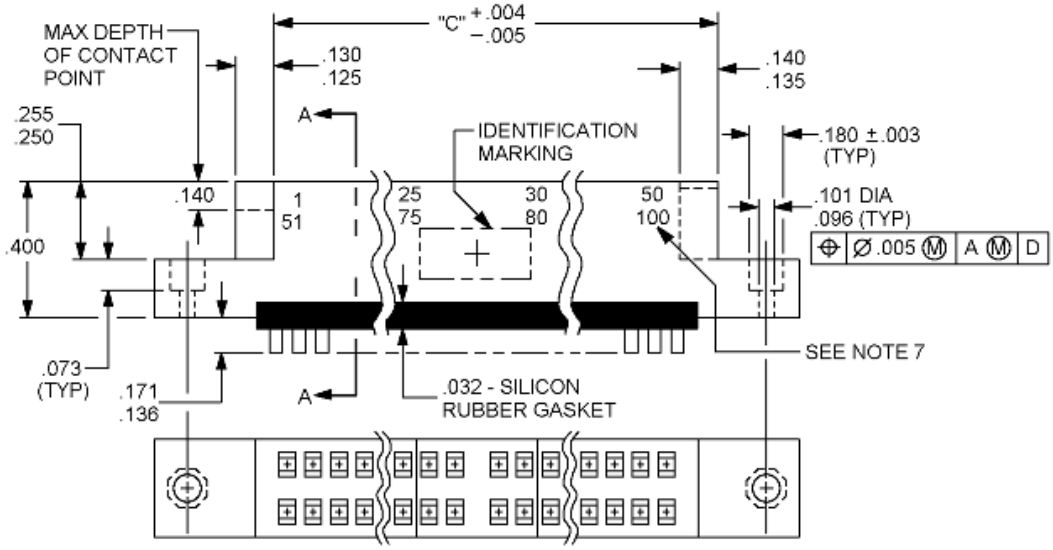
1/ Dash numbers 91 through 180 and 190 through 229 are for style 2 (external keying) connectors.

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.




STYLE 3 (SILICON RUBBER GASKET)

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

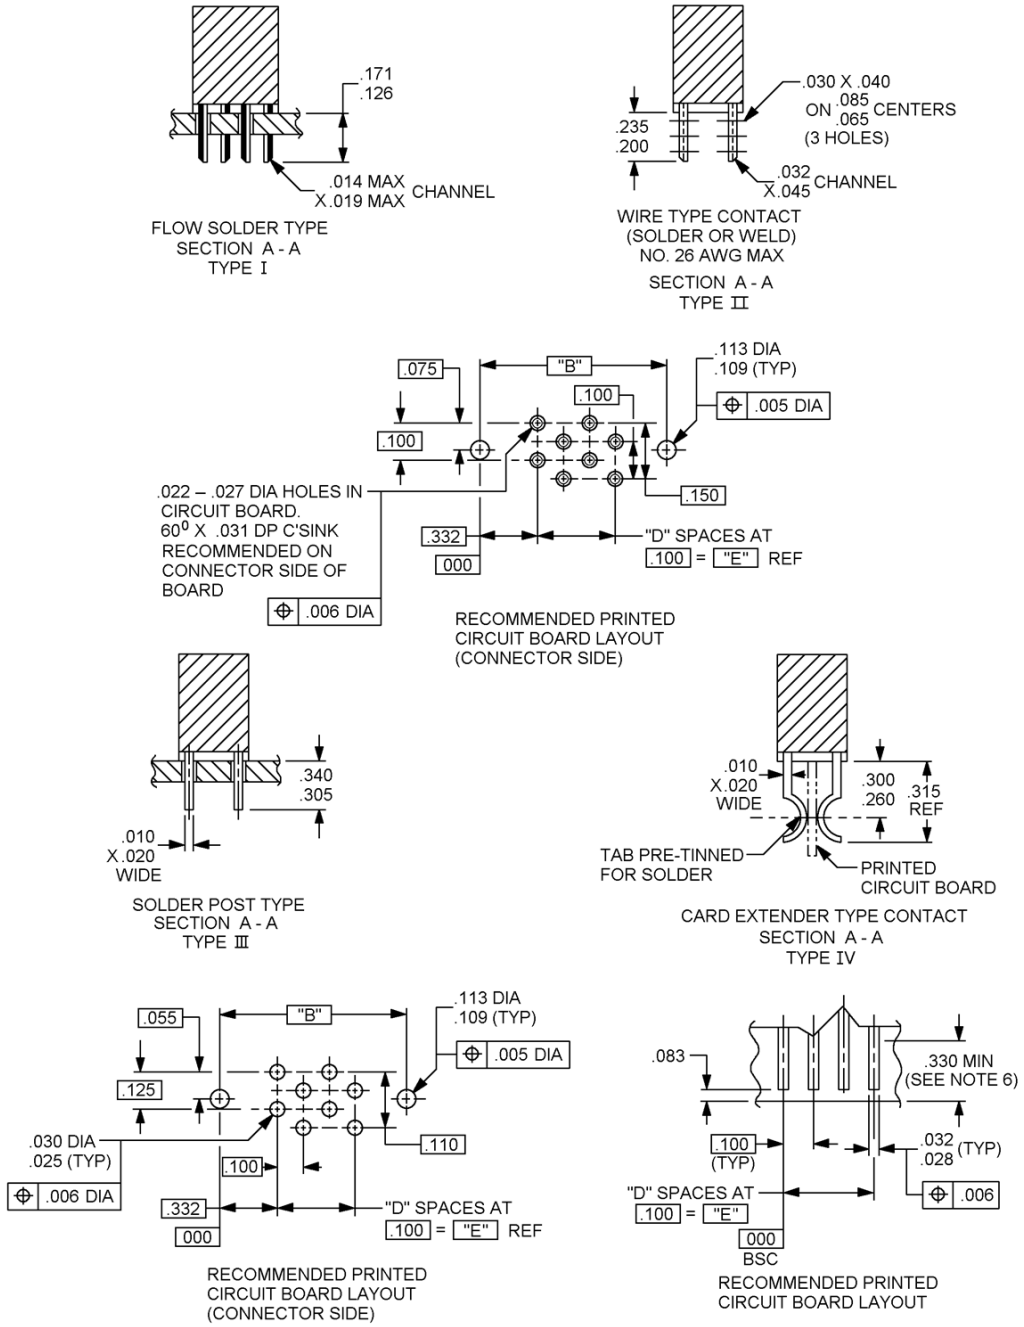
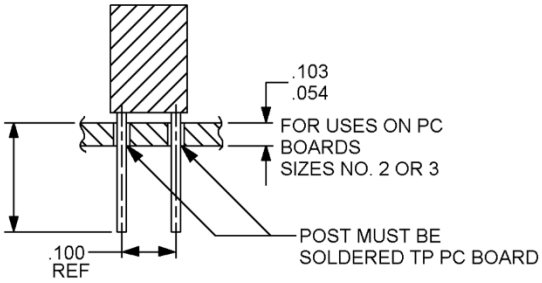


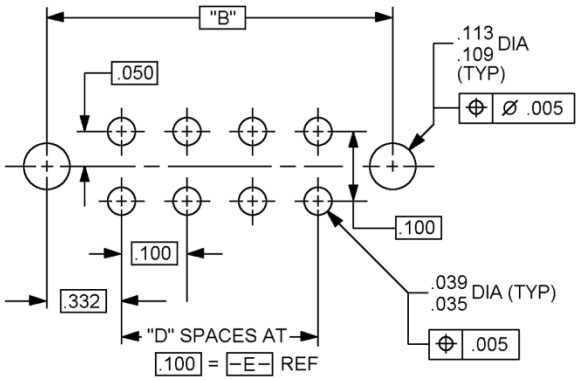

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



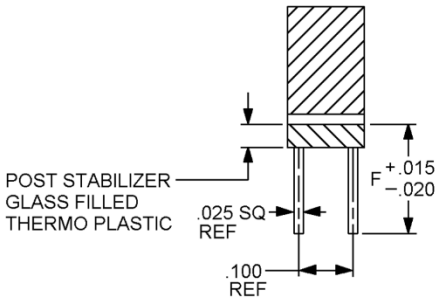
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.




MATERIAL: BERYLLIUM COPPER .022 X .027 POST REF
(.034 MAX DIAGONAL) 8 TURNS NO. 30 WIRE PER WRAP




RECOMMENDED PC BOARD LAYOUT
(CONNECTOR SIDE)
BOARD MOUNT TYPE V




RACK MOUNT TYPE VI
WIRE WRAPPED TYPE CONTACT

SECTION A - A

| Post length type | F |
|---|---|
| 1 | .405 (10.29 mm) |
| 2 | .565 (14.35 mm) |
| 3 | .725 (18.42 mm) |

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

| Dash 1/ numbers | Number of contacts | Dimensions | | | | | Contact identification numbers |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| 181 | 30 | 2.355 (59.82) | 2.065 (52.45) | 1.665 (42.29) | 14 | 1.400 (35.56) | 1 - 15<br>16 - 30 |
| 182 | 40 | 2.855 (72.52) | 2.656 (67.46) | 2.165 (54.99) | 19 | 1.900 (48.26) | 1 - 20<br>21 - 40 |
| 183 | 50 | 3.355 (85.22) | 3.065 (77.85) | 2.665 (67.69) | 24 | 2.400 (60.96) | 1 - 25<br>26 - 50 |
| 184 | 60 | 3.855 (97.92) | 3.565 (90.55) | 3.165 (80.39) | 29 | 2.900 (73.66) | 1 - 30<br>31 - 60 |
| 185 | 70 | 4.355 (110.62) | 4.065 (103.25) | 3.665 (93.09) | 34 | 3.400 (86.36) | 1 - 35<br>36 - 70 |
| 186 | 80 | 4.855 (123.32) | 4.656 (118.26) | 4.165 (105.79) | 39 | 3.900 (99.06) | 1 - 40<br>41 - 80 |
| 187 | 90 | 5.355 (136.02) | 5.065 (128.65) | 4.665 (118.49) | 44 | 4.400 (111.76) | 1 - 45<br>46 - 90 |
| 188 | 100 | 5.855 (148.72) | 5.565 (141.35) | 5.165 (131.19) | 49 | 4.900 (124.46) | 1 - 50<br>51 - 100 |
| 189 | 110 | 6.355 (161.42) | 6.065 (154.05) | 5.665 (143.89) | 54 | 5.400 (137.16) | 1 - 55<br>56 - 110 |

1/ Dash numbers 181 through 189 are for styles 03 (silicon rubber gasket) connectors.

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .003 | 0.08 | .045 | 1.14 | .130 | 3.30 |
| .004 | 0.10 | .050 | 1.27 | .135 | 3.43 |
| .005 | 0.13 | .054 | 1.37 | .136 | 3.45 |
| .006 | 0.15 | .055 | 1.40 | .140 | 3.56 |
| .010 | 0.25 | .063 | 1.60 | .150 | 3.81 |
| .012 | 0.30 | .065 | 1.65 | .171 | 4.34 |
| .014 | 0.36 | .073 | 1.85 | .180 | 4.57 |
| .015 | 0.38 | .075 | 1.91 | .200 | 5.08 |
| .018 | 0.46 | .080 | 2.03 | .235 | 5.97 |
| .019 | 0.48 | .081 | 2.06 | .242 | 6.15 |
| .020 | 0.51 | .083 | 2.11 | .248 | 6.30 |
| .022 | 0.56 | .085 | 2.16 | .250 | 6.35 |
| .025 | 0.64 | .096 | 2.44 | .255 | 6.48 |
| .027 | 0.69 | .100 | 2.54 | .260 | 6.60 |
| .028 | 0.71 | .101 | 2.57 | .300 | 7.62 |
| .030 | 0.76 | .103 | 2.62 | .305 | 7.75 |
| .032 | 0.81 | .109 | 2.77 | .315 | 8.00 |
| .034 | 0.86 | .110 | 2.79 | .330 | 8.38 |
| .035 | 0.89 | .113 | 2.87 | .332 | 8.43 |
| .039 | 0.99 | .125 | 3.18 | .340 | 8.64 |
| .040 | 1.02 | .126 | 3.20 | .400 | 10.16 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) on three place decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-DTL-55302/26 and MIL-DTL-55302/110.
5. Use printed circuit boards with the type III receptacle and type V receptacle.
6. Minimum pad length on printed circuit board.
7. Numbers indication, every 5 cavities marked or molded on side. Numbers indicating end cavities and lines indicating every 5 cavities molded or marked on mating face.
8. Location indicators embossed on surface.

FIGURE 1. Connectors, receptacle, .100 (2.54 mm) square grid - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Material:

Insulator body: Insulator material shall be in accordance with MIL-DTL-55302 or type GLCP-30F in accordance with ASTM D5138 or MIL-M-24519.

Contact material: Contact material in accordance with MIL-DTL-55302 or beryllium copper alloy C17400 in accordance with ASTM B768.

Gasket: Silicon rubber.

Plating:

Engagement area: Gold in accordance with MIL-DTL-55302 for .100 inch (2.54 mm) length, over nickel all over in accordance with MIL-DTL-55302.

Termination area: Tin lead over nickel in accordance with MIL-DTL-55302 for the lengths:

.165 inch (4.19 mm) minimum length for type I, .200 inch (5.08 mm) minimum length for type II.
.300 inch (7.62 mm) minimum length for type III, .140 inch (3.56 mm) minimum length for type IV.

Termination for type V and VI contacts:

Gold over nickel in accordance with MIL-DTL-55302 for the entire termination length.

Contact identification: See figure 1.

Contact rating: 3.0 amperes maximum per contact, 2.25 amperes continuous per contact at 75°F.

Keying: See MIL-DTL-55302/31.

Oversized pin exclusions (sockets only): .0465 diameter pin.
Contact separation force: The connector shall meet the requirements as specified in MIL-DTL-55302/29.

Wire size: Number 26 AWG maximum with type II, solder eyelet contact for wire termination. Number 30 AWG may be used with type V and VI wrappost contacts.

Resistance to test probe damage: The connector shall meet the requirements as specified in MIL-DTL-55302/30.

Mating and unmating: The maximum mating force in pounds shall be the number of contacts multiplied by .25 and the withdrawal force in pounds shall be a minimum of .025 times the number of contacts and shall not exceed the measured insertion force.

Contact resistance: No individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: Not applicable.

Dielectric withstanding voltage:

Sea level: 900 volts rms.
High altitude: 200 volts rms.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

Replacement contacts: See MIL-DTL-55302/32.

Contact removal tool: See SAE-AS81969/9-01 for type I through type V. Use Tyco Electronics tool 1-265871-7 for type V and VI.

Part or Identifying Number (PIN): M55302/27-(dash number from figure 1).

Patent number 3,404,367. The Government has a royalty free license under this patent for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government.

Supersession data: See table I.

TABLE I. Style 1 (Internal keying) supersession data.

| Style 1 (internal keying) PIN | Superseding style 2 (external keying) PIN 1/ |
|---|---|
| M55302/27-25 | M55302/27-91 |
| M55302/27-26 | M55302/27-100 |
| M55302/27-27 | M55302/27-109 |
| M55302/27-28 | M55302/27-172 |
| M55302/27-37 | M55302/27-163 |
| M55302/27-38 | M55302/27-136 |
| M55302/27-39 | M55302/27-154 |
| M55302/27-40 | M55302/27-127 |
| M55302/27-41 | M55302/27-145 |
| M55302/27-42 | M55302/27-118 |
| M55302/27-29 | M55302/27-92 |
| M55302/27-30 | M55302/27-101 |
| M55302/27-31 | M55302/27-110 |
| M55302/27-32 | M55302/27-173 |
| M55302/27-43 | M55302/27-164 |
| M55302/27-44 | M55302/27-137 |
| M55302/27-45 | M55302/27-155 |
| M55302/27-46 | M55302/27-128 |
| M55302/27-47 | M55302/27-146 |
| M55302/27-48 | M55302/27-119 |
| M55302/27-01 | M55302/27-93 |
| M55302/27-02 | M55302/27-102 |
| M55302/27-03 | M55302/27-111 |
| M55302/27-04 | M55302/27-174 |
| M55302/27-49 | M55302/27-165 |
| M55302/27-50 | M55302/27-138 |
| M55302/27-51 | M55302/27-156 |
| M55302/27-52 | M55302/27-129 |
| M55302/27-53 | M55302/27-147 |
| M55302/27-54 | M55302/27-120 |
| M55302/27-05 | M55302/27-94 |
| M55302/27-06 | M55302/27-103 |
| M55302/27-07 | M55302/27-112 |
| M55302/27-08 | M55302/27-175 |
| M55302/27-55 | M55302/27-166 |
| M55302/27-56 | M55302/27-139 |
| M55302/27-57 | M55302/27-157 |
| M55302/27-58 | M55302/27-130 |
| M55302/27-59 | M55302/27-148 |
| M55302/27-60 | M55302/27-121 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

TABLE I. Style 1 (Internal keying) supersession data - Continued.

| Style 1 (internal keying) PIN | Superseding style 2 (external keying) PIN 1/ |
|---|---|
| M55302/27-33 | M55302/27-95 |
| M55302/27-34 | M55302/27-104 |
| M55302/27-35 | M55302/27-113 |
| M55302/27-36 | M55302/27-176 |
| M55302/27-61 | M55302/27-167 |
| M55302/27-62 | M55302/27-140 |
| M55302/27-63 | M55302/27-158 |
| M55302/27-64 | M55302/27-131 |
| M55302/27-65 | M55302/27-149 |
| M55302/27-66 | M55302/27-122 |
| M55302/27-09 | M55302/27-96 |
| M55302/27-10 | M55302/27-105 |
| M55302/27-11 | M55302/27-114 |
| M55302/27-12 | M55302/27-177 |
| M55302/27-67 | M55302/27-168 |
| M55302/27-68 | M55302/27-141 |
| M55302/27-69 | M55302/27-159 |
| M55302/27-70 | M55302/27-132 |
| M55302/27-71 | M55302/27-150 |
| M55302/27-72 | M55302/27-123 |
| M55302/27-13 | M55302/27-97 |
| M55302/27-14 | M55302/27-106 |
| M55302/27-15 | M55302/27-115 |
| M55302/27-16 | M55302/27-178 |
| M55302/27-73 | M55302/27-169 |
| M55302/27-74 | M55302/27-142 |
| M55302/27-75 | M55302/27-160 |
| M55302/27-76 | M55302/27-133 |
| M55302/27-77 | M55302/27-151 |
| M55302/27-78 | M55302/27-124 |
| M55302/27-17 | M55302/27-98 |
| M55302/27-18 | M55302/27-107 |
| M55302/27-19 | M55302/27-116 |
| M55302/27-20 | M55302/27-179 |
| M55302/27-79 | M55302/27-170 |
| M55302/27-80 | M55302/27-143 |
| M55302/27-81 | M55302/27-161 |
| M55302/27-82 | M55302/27-134 |
| M55302/27-83 | M55302/27-152 |
| M55302/27-84 | M55302/27-125 |
| M55302/27-21 | M55302/27-99 |
| M55302/27-22 | M55302/27-108 |
| M55302/27-23 | M55302/27-117 |
| M55302/27-24 | M55302/27-180 |
| M55302/27-85 | M55302/27-171 |
| M55302/27-86 | M55302/27-144 |
| M55302/27-87 | M55302/27-162 |
| M55302/27-88 | M55302/27-135 |
| M55302/27-89 | M55302/27-153 |
| M55302/27-90 | M55302/27-126 |

1/ Style 2 (external keying) receptacles can be mated to existing style 1(internal keying) plugs.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

Group qualification: See table II.

TABLE II. Group qualification.

| Qualification of any of the following connectors 1/, 2/ | Qualifies the following connectors | Retains qualification on the following |
|---|---|---|
| M55302/24-** | M55302/24-** | M55302/24-**<br>M55302/25-**<br>M55302/27-** |
| M55302/25-** | M55302/24-**<br>M55302/25-**<br>M55302/27-** | |
| M55302/27-** | M55302/24-**<br>M55302/27-** | |

1/ For initial qualification, connectors with the largest number of contact positions from the left-hand column shall be used to obtain qualification for parts in corresponding center column.
2/ For qualification retention, data may be supplied on any two parts from the left-hand column in order to retain qualification for the parts listed in the right-hand column.

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/26
MIL-DTL-55302/29
MIL-DTL-55302/30
MIL-DTL-55302/31
MIL-DTL-55302/32
MIL-DTL-55302/110
MIL-M-24519
ASTM B768
ASTM D5138
SAE-AS81969/9

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-106)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.