
FED. SUP CLASS
5940

REVIEWERS: ARMY–EL; NAVY–DOCKS; AF–ROAMA
USERS: ARMY–GL, NAVY–MC, SHIPS, WEPS

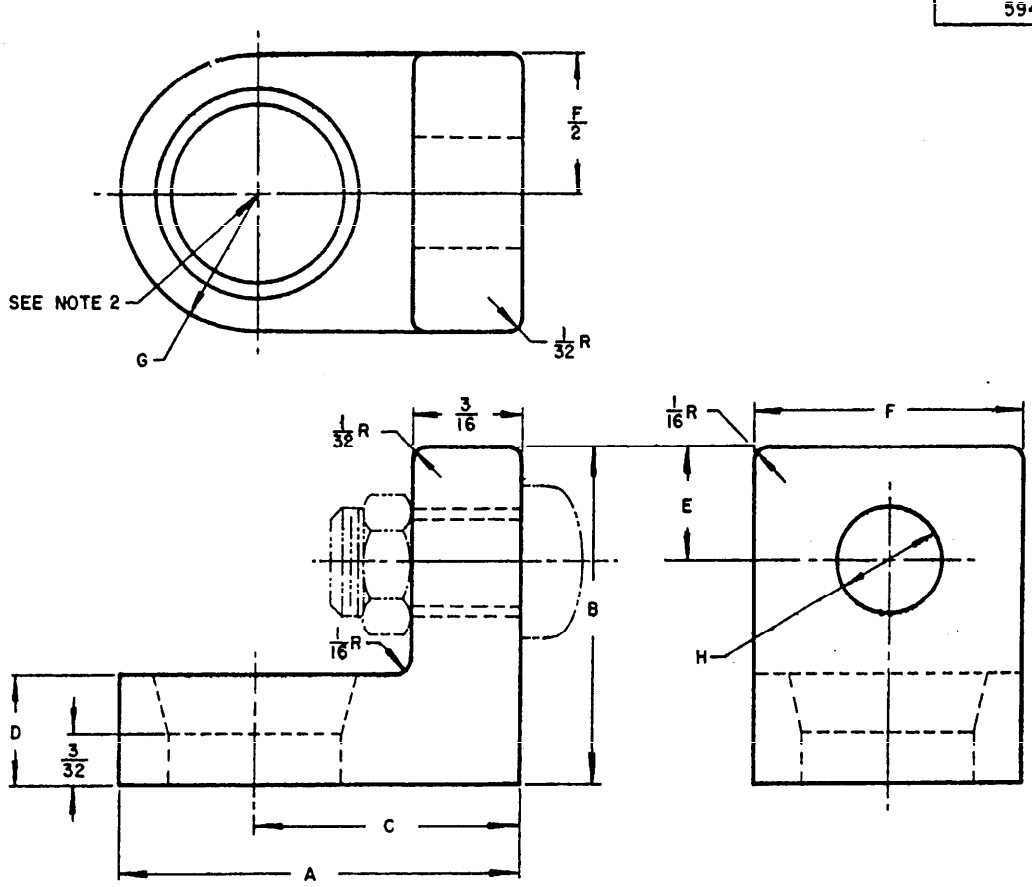

MS PART NO.	A	B	C	D	E	F	G RAD.	H DIA.	MACHINE SCREW REQUIRED (SEE NOTE 4)
MS 17330–1	5/8	9/16	13/32	3/16	11/64	7/16	7/32	5/32	6–32 UNC–2A
MS 17330–2	3/4	11/16	15/32	7/32	1/4	9/16	9/32	3/16	8–32 UNC–2A

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE ± 1/64 ON FRACTIONS.
2. SIZE OF HOLE OPTIONAL.
3. MATERIAL FOR THE CONNECTOR IS LEAD-ALLOY (4 PERCENT ANTIMONY, 96 PERCENT LEAD).
4. ROUND HEAD MACHINE SCREW (LEAD COATED) 1/2 INCH LONG WITH HEXAGON NUT (LEAD COATED) IS REQUIRED.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(A) ENTIRE STANDARD REVISED

APPROVED 3 AUGUST 1961 REVISED (A) 11 JUNE 1964

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A MO (ATAC) Other Cust NAVY – Docks AF – ROAMA	TITLE ADAPTER, BATTERY TERMINAL	MILITARY STANDARD MS 17330
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.