
FED. SUP CLASS 5305

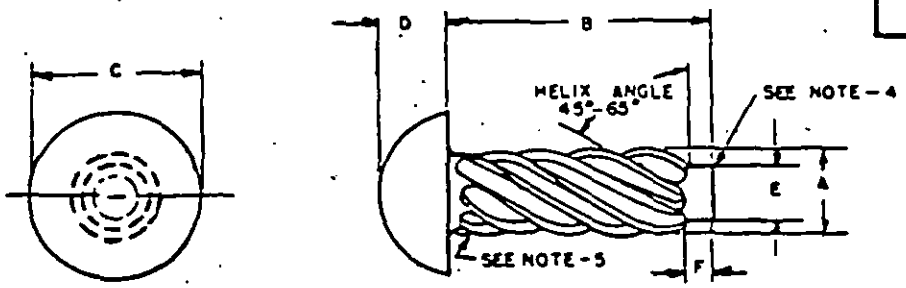

NOMINAL SIZE			#00(.058)	#0(.073)	#2(.098)	#4(.114)	#6(.138)
THREADS IN CIRCUMFERENCE			6	6	8	7	7
*A BODY DIAMETER		Max	.060	.075	.100	.116	.140
		Min	.057	.072	.097	.112	.136
*C HEAD DIAMETER		Max	.099	.127	.162	.211	.260
		Min	.090	.118	.146	.193	.240
*D HEAD HEIGHT		Max	.034	.049	.069	.096	.103
		Min	.026	.041	.059	.075	.091
*E PILOT DIAMETER		Max	.049	.063	.083	.096	.116
		Min	.046	.060	.080	.092	.112
RECOMMENDED HOLE SIZE			.052	.067	.086	.104	.120
DRILL SIZE			55	51	44	37	31
*B LENGTH	LENGTH TOLERANCE	*F Pilot Reference	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
1/8	±1/64	3/64	1	7	13	19	
3/16		3/64	2	8	14	20	
1/4		3/64	3	9	15	21	27
5/16		3/64				22	28
3/8		1/16				23	29
1/2	±1/32	1/16					30

NOMINAL SIZE			#7(.152)	#8(.164)	#10(.179)	#12(.209)	#14(.239)
THREADS IN CIRCUMFERENCE			8	8	8	7	7
*A BODY DIAMETER		Max	.154	.167	.182	.212	.240
		Min	.150	.162	.177	.206	.236
*C HEAD DIAMETER		Max	.285	.309	.359	.408	.457
		Min	.264	.297	.334	.382	.429
*D HEAD HEIGHT		Max	.111	.120	.137	.153	.170
		Min	.099	.107	.123	.139	.155
*E PILOT DIAMETER		Max	.126	.136	.150	.177	.202
		Min	.122	.132	.146	.173	.198
RECOMMENDED HOLE SIZE			.136	.144	.161	.191	.221
DRILL SIZE			29	27	20	11	2
*B LENGTH	LENGTH TOLERANCE	*F Pilot Reference	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
5/16	±1/64	3/64	35				
3/8		1/16	36	41	46		
1/2	±1/32	1/16	37	42	47	52	57
5/8		5/64		43	48	53	58
3/4		5/64				54	59

Ⓐ For changes see sheets 1 and 2.

REVIEWER: MI, MO, IS, WC, 69
USER: EL, MU, CL, WP, SH, YD, MC

APPROVED 12 AUG 59 REVISED Ⓐ 13 OCT 1965

This standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	*C
Other Cust	SH 69

TITLE: SCREW, DRIVE, ROUND HEAD, TYPE U, STEEL, CARBON, CADMIUM PLATED

MILITARY STANDARD

MS21318

PROCUREMENT SPECIFICATION: FF-S-107

SUPERSEDING Ⓐ AN535, BQXX1, and BQXX1.1

SHEET Ⓐ 1 OF 2

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:32Z
Check the source to verify that this is the current version before use.

MATERIAL: Steel shall be in accordance with procurement specification.
PROTECTIVE COATING: Cadmium plated in accordance with procurements specification.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS21318-1.
RECOMMENDED USE: These drive screws are not recommended for use in material the thickness of which is less than one diameter of the screw.
NOTES: (1) For design feature purposes, this standard, takes precedence over procurement documents referenced herein.
(2) Reference documents shall be of the issue in effect on date of invitations for bid.
(A) *(3) Symbols changed to agree with ASA B18.6.4.
(4) The blunt end of the pilot, as illustrated above, may have a slight angle, due to the natural flow of material in the cut-off process.
(A) (5) Metallic drive screws shall have fully formed threads extending from base of pilot to the head except that threads at the starting end and under the head may be incomplete for a length equal to one-half of the maximum screw diameter, due to the natural flow of material in the thread forming operation.

(A)

INTERCHANGEABILITY TABLE

The screws covered by dash numbers given in AN535 are cancelled after dates indicated on the documents. Use the numbers given in the preceding sheet. Use only new screws for design and replacement. Replacement shall be in accordance with this table. Cancelled screws may be used until existing stock is depleted.

TABLE II

CANCELLED AN535	SUPERSEDED BY MS21318	CANCELLED AN535	SUPERSEDED BY MS21318	CANCELLED AN535	SUPERSEDED BY MS21318	CANCELLED AN535	SUPERSEDED BY MS21318
00-2	-1	3-4	-15	6-6	-29	12-8	-52
00-3	-2	4-2	-19	6-8	-30	12-10	-53
00-4	-3	4-3	-20	8-6	-41	12-12	-54
0-2	-7	4-4	-21	8-8	-42	14-8	-57
0-3	-8	4-5	-22	8-10	-43	14-10	-58
0-4	-9	4-6	-23	10-6	-46	14-12	-59
2-2	-13	6-4	-27	10-8	-47		
2-3	-14	6-5	-28	10-10	-48		

(A) APPROVED 12 AUG 1959 REVISED (A) FOR CHANGES SEE SHEET 1 AND 2

P.A. VC Other Coast SH 69	TITLE SCREW, DRIVE, ROUND HEAD, TYPE U, STEEL, CARBON, CADMIUM PLATED	MILITARY STANDARD MS 21318
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES (A) AN535, BQMX1, and BQMX1.1	SHEET 2 OF (A)

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:32Z
Check the source to verify that this is the current version before use.