FED SUP CLASS
5315

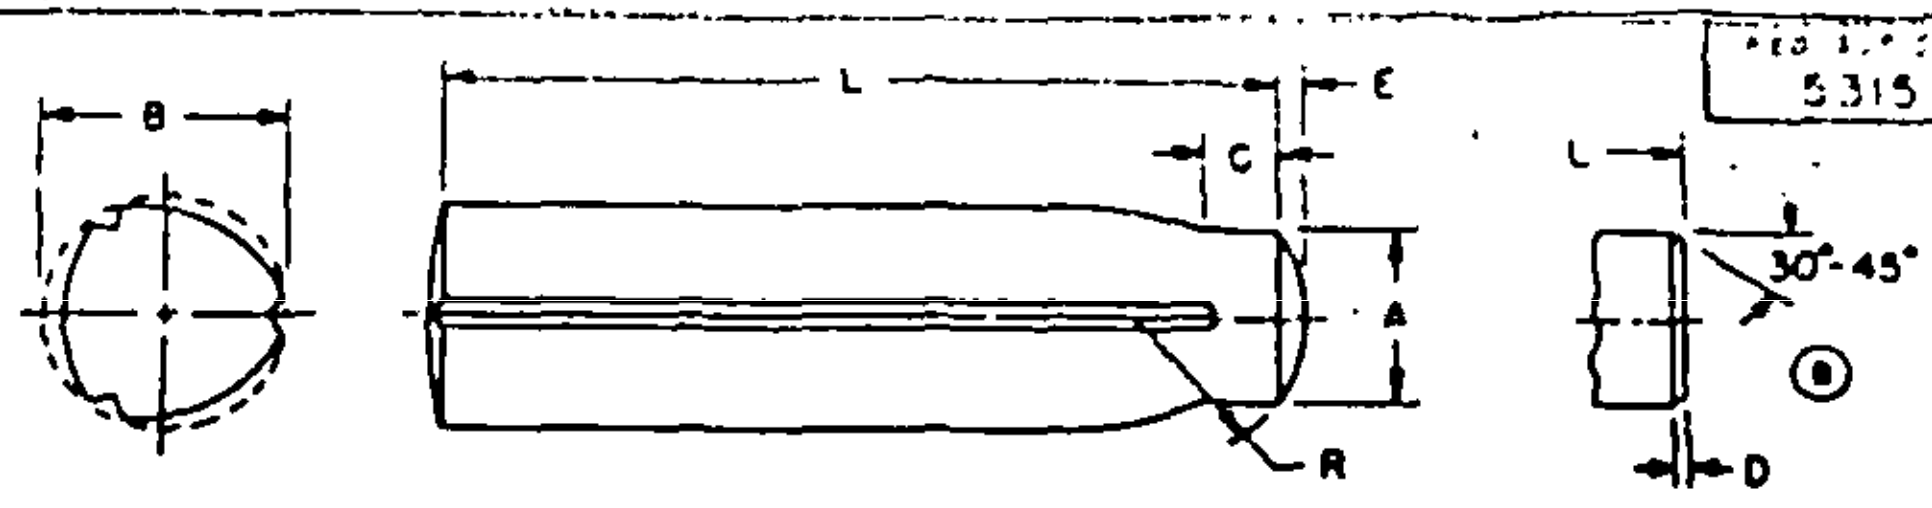

REVIEWER: AV, EA, 13, MI, MS
USER: AT, GL, MC, ME, MU, VT

| NOMINAL SIZE | | .0625 | .0781 | .0938 | .125 | .1562 | .1875 |
|---|---|---|---|---|---|---|---|
| A DIAMETER | MAX<br>MIN | .0625<br>.0615 | .0791<br>.0771 | .0938<br>.0928 | .1250<br>.1230 | .1562<br>.1542 | .1875<br>.1833 |
| C PILOT LENGTH | REF | .031 | .031 | .031 | .031 | .062 | .062 |
| D CHAMFER LENGTH* | MIN | Ⓑ .016 | .016 | .016 | .016 | .031 | .031 |
| E CROWN HEIGHT* | REF | .006 | .009 | .009 | .013 | .017 | .018 |
| R RADIUS | ±.010 | .078 | .094 | .125 | .156 | .188 | .250 |
| RECOMMENDED HOLE SIZE | MAX<br>MIN | .0640<br>.0625 | .0798<br>.0781 | .0956<br>.0938 | .1271<br>.1250 | .1587<br>.1562 | .1903<br>.1875 |
| SINGLE SHEAR STRENGTH-LBS | MIN | 270 | 430 | 620 | 1100 | 1720 | 2400 |

| L LENGTH ±.010 | DASH NO. | B DIA ±.001 | DASH NO. | B DIA ±.001 | DASH NO. | B DIA ±.001 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| .250 | 1 | .066 | 5 | .082 | | | | | | | | |
| .375 | 2 | .066 | 6 | .082 | 10 | .099 | 14 | .132 | | | | |
| .500 Ⓑ | 3 | .066 | 7 | .082 | 11 | .099 | 15 | .132 | 20 | .164 | 25 | .195 |
| .625 | 4 | .066 | 8 | .082 | 12 | .099 | 16 | .132 | 21 | .164 | 26 | .195 |
| .750 | | | 9 | .082 | 13 | .099 | 17 | .132 | 22 | .164 | 27 | .195 |
| 1.000 | | | | | | | 18 | .131 | 23 | .163 | 28 | .195 |
| 1.250 | | | | | | | 19 | .130 | 24 | .162 | 29 | .194 |
| 1.500 | | | | | | | | | | | 30 | .194 |
| 1.750 | | | | | | | | | | | 31 | .194 |

NOTES:

Ⓑ 1. MATERIAL: Corrosion-resisting steel, 300 series, in accordance with Fed. Std. No. 66. The minimum ultimate shear strength shall be 90,000 PSI.

2. PROTECTIVE COATING: Passivated in accordance with QQ-P-35.

3. DIMENSIONS: All dimensions are in inches, unless otherwise specified.

4. APPLICATION: Grooved pins are locked securely in place by elastic deformation, eliminating the need for tapping or reaming of tapered or sized holes.

5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS35675-1.

6. Diameter "B" is the expanded diameter as measured with a ring gage.

*7. Ends on all sizes may be crowned or chamfered.
Ends on sizes thru .250 may be square with .01 to .02 radius on the edges.

8. Referenced documents shall be of the issue in effect on date of invitations for bid.

9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 11 JAN 1956 REVISED Ⓐ 17 MAR 1965 Ⓑ 22 AUG 1975

Ⓑ For changes see sheets 1 and 2.

| | | |
|---|---|---|
| P A VC<br>Other Cust AS<br>82 | TITLE<br>PIN, GROOVED, HEADLESS-LONGITUDINAL<br>STRAIGHT GROOVE, CORROSION-RESISTING STEEL | MILITARY STANDARD<br>MS35675 |
| PROCUREMENT SPECIFICATION<br>MIL-P-20700 | SUPERSEDES AN382 in part | SHEET 1 OF 2 |

DD FORM 1 MAY 61 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5315

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| NOMINAL SIZE | | .2188 | | .250 | | .3125 | | .375 | | .4375 | | .500 | |
| A DIAMETER | MAX<br>MIN | .2188<br>.2168 | | .2500<br>.2480 | | .3125<br>.3105 | | .3750<br>.3730 | | .4375<br>.4355 | | .5000<br>.4980 | |
| C PILOT LENGTH | REF | .062 | | .062 | | .094 | | .094 | | .094 | | .094 | |
| D CHAMFER LENGTH* Ⓑ | MIN | .031 | | .031 | | .047 | | .047 | | .047 | | .047 | |
| E CROWN HEIGHT* | REF | .022 | | .026 | | .034 | | .039 | | .047 | | .052 | |
| R RADIUS | ±.010 | .281 | | .312 | | .375 | | .469 | | .531 | | .625 | |
| RECOMMENDED HOLE SIZE | MAX<br>MIN | .2219<br>.2188 | | .2534<br>.2500 | | .3166<br>.3125 | | .3797<br>.3750 | | .4428<br>.4375 | | .5060<br>.5000 | |
| SINGLE SHEAR STRENGTH-LBS | MIN | 3380 | | 4420 | | 6900 | | 9900 | | 13500 | | 17600 | |
| L LENGTH | ±.010 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 | DASH NO. | B DIA ±.002 |
| .625 | | 32 | .227 | 38 | .260 | 45 | .325 | | | | | | |
| .750 | | 33 | .227 | 39 | .260 | 46 | .325 | 57 | .389 | | | | |
| 1.000 | | 34 | .227 | 40 | .260 | 47 | .325 | 58 | .389 | 69 | .453 | 81 | .519 |
| 1.250 | | 35 | .227 | 41 | .260 | 48 | .325 | 59 | .389 | 70 | .453 | 82 | .519 |
| 1.500 | Ⓑ | 36 | .226 | 42 | .259 | 49 | .325 | 60 | .389 | 71 | .453 | 83 | .519 |
| 1.750 | | 37 | .226 | 43 | .259 | 50 | .324 | 61 | .388 | 72 | .453 | 84 | .519 |
| 2.000 | | | | 44 | .259 | 51 | .324 | 62 | .388 | 73 | .452 | 85 | .519 |
| 2.250 | | | | | | 52 | .324 | 63 | .388 | 74 | .452 | 86 | .518 |
| 2.500 | | | | | | 53 | .323 | 64 | .388 | 75 | .452 | 87 | .518 |
| 2.750 | | | | | | 54 | .323 | 65 | .388 | 76 | .452 | 88 | .518 |
| 3.000 | | | | | | 55 | .323 | 66 | .387 | 77 | .451 | 89 | .517 |
| 3.250 | | | | | | | | | | | | 90 | .517 |
| 3.500 | | | | | | 56 | .322 | 67 | .387 | 78 | .450 | 91 | .516 |
| 3.750 | | | | | | | | | | | | 92 | .516 |
| 4.000 | | | | | | | | 68 | .386 | 79 | .449 | 93 | .515 |
| 4.250 | | | | | | | | | | | | 94 | .515 |
| 4.500 | | | | | | | | | | 80 | .448 | 95 | .514 |

REVIEWERS: AV, EA, IS, MI, NS
USER: AT, GL, MC, MR, MU

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 11 JAN 1954 REVISED Ⓐ 17 MAR 1965 Ⓑ FOR CHANGES SEE SHEETS 1 AND 2.

| | | |
|---|---|---|
| P.A. MC<br>Other Cust AS<br>82 | TITLE<br>PIN, GROOVED, HEADLESS-LONGITUDINAL STRAIGHT GROOVE, CORROSION-RESISTING STEEL | MILITARY STANDARD<br>MS35675 |
| PROCUREMENT SPECIFICATION<br>MIL-P-20700 | SUPERSEDES AECI2 in part | SHEET 2 OF 2 |

DD FORM 672-1 (COORDINATED).

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE