
FED SUP CLASS 5306

MS9301

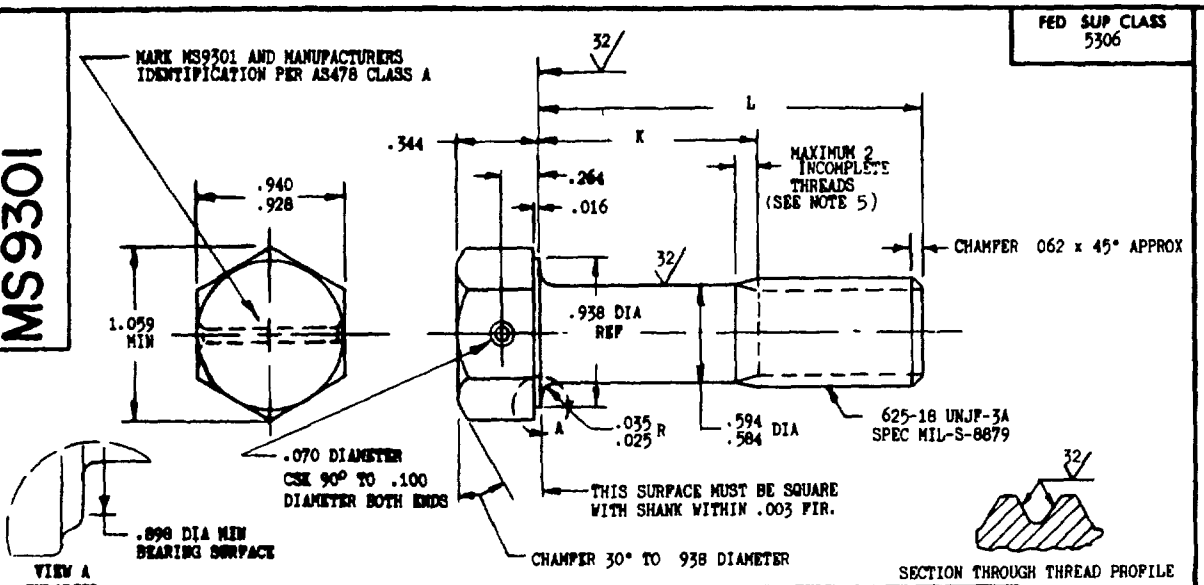

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9301-03	.938	.118-.138	14.43
MS9301-04	1.000	.118-.138	14.91
MS9301-05	1.062	.118-.138	15.39
MS9301-06	1.125	.118-.138	15.87
MS9301-07	1 188	.118-.138	16.35
MS9301-08	1.250	.118-.138	16.83
MS9301-09	1 312	.118-.138	17.31
MS9301-10	1 375	.118-.138	17.79
MS9301-11	1 438	.118-.138	18.26
MS9301-12	1 500	.118-.138	18.74
MS9301-13	1.562	.118-.138	19.22
MS9301-14	1.625	.118-.138	19.70
MS9301-15	1.688	.128-.188	20.18
MS9301-16	1.750	.190-.250	20.66
MS9301-17	1.812	.252-.312	21.14
MS9301-18	1.875	315-.375	21.61
MS9301-19	2.000	440- 500	22.57
MS9301-20	2.125	.565- 625	23.53
MS9301-21	2.250	.690-.750	24.49
MS9301-22	2.375	.815-.875	25.44
MS9301-23	2.500	.940-1.000	26.40
MS9301-24	2 625	1.065-1.125	27.36
MS9301-25	2.750	1.190-1.250	28.31
MS9301-26	2.875	1.315-1.375	29.27
MS9301-27	3.000	1.440-1.500	30.23
MS9301-28	3.125	1.565-1.625	31.18
MS9301-29	3.250	1.690-1.750	32.14
MS9301-30	3.375	1.815-1.875	33.10
MS9301-31	3.500	1 940-2 000	34.06
MS9301-32	3.625	2.065-2 125	35.01
MS9301-33	3.750	2.190-2 250	35.97
MS9301-34	3 875	2.315-2 375	36.93
MS9301-35	4 000	2.440-2 500	37.88
MS9301-36	4 125	2 565-2 625	38.84
MS9301-37	4 250	2 690-2.750	39.80
MS9301-38	4.375	2.815-2.875	40.76
MS9301-39	4 500	2 940-3 000	41.71
MS9301-40	4 625	3.065-3 125	42.67
MS9301-41	4 750	3 190-3 250	43.63
MS9301-42	4 875	3 315-3 375	44.58
MS9301-43	5 000	3.440-3 500	45.54
MS9301-44	5.125	3.565-3.625	46.50
MS9301-45	5.250	3.690-3 750	47.45
MS9301-46	5.375	3.815-3.875	48.41
MS9301-47	5.500	3 940-4 000	49.37
MS9301-48	5.625	4.065-4 125	50.33
MS9301-49	5.750	4.190-4.250	51.28
MS9301-50	5.875	4.315-4.375	52.24
MS9301-51	6.000	4.440-4 500	53.20

1. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
2. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH
3. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
4. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR
5. INCOMPLETE THREADS NOT TO ENTER FILLET.
6. MATERIAL: STEEL AMS 6322.
7. HARDNESS: ROCKWELL C26-32.
8. FINISH: BLACK OXIDE TREATMENT AMS 2485.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON
12. BREAK SHARP EDGES .003- 015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

(A) **INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.**

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 24 Sept 65 REVISED (A) 26 Oct 72

Review activities: USAF - 11 Navy - AS

This military standard is approved by the Department of the Air Force (11) and the Department of the Navy and is mandatory for use by the activity. All other military activities are required to comply with this standard when suitable

P.A. USAF - 11 Other Cust Navy - AS	TITLE BOLT, MACHINE-STEEL AMS 6322, BLACK OXIDE, DRILLED, 1 HOLE, HEXAGON HEAD, .625-18 UNJF-3A	MILITARY STANDARD MS9301
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

E-25-144

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:14Z
Check the source to verify that this is the current version before use.