
MS9579

FED. SUP CLASS
5306

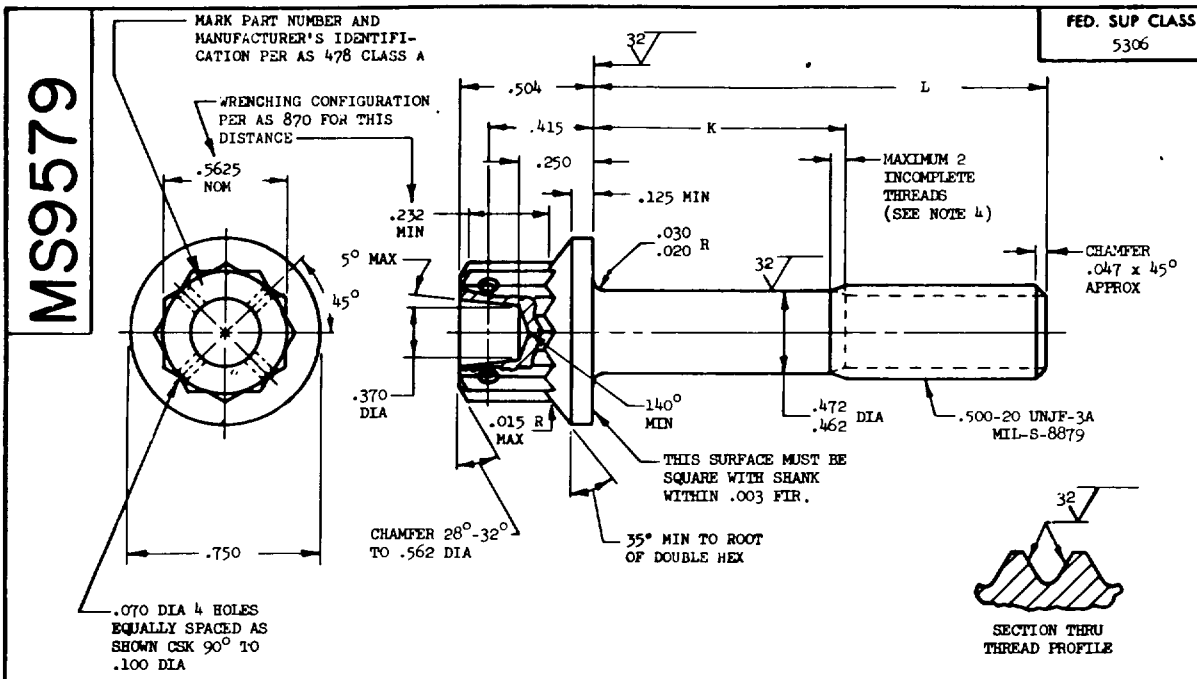

PART NO.	L	K	APPROX WEIGHT LB/100
MS9579-03	.750	.105- .125	7.54
MS9579-04	.812	.105- .125	7.83
MS9579-05	.875	.105- .125	8.12
MS9579-06	.938	.105- .125	8.41
MS9579-07	1.000	.105- .125	8.70
MS9579-08	1.062	.105- .125	8.99
MS9579-09	1.125	.105- .125	9.28
MS9579-10	1.188	.105- .125	9.57
MS9579-11	1.250	.105- .125	9.86
MS9579-12	1.312	.105- .125	10.15
MS9579-13	1.375	.105- .125	10.45
MS9579-14	1.438	.128- .188	10.74
MS9579-15	1.500	.190- .250	11.04
MS9579-16	1.562	.252- .312	11.33
MS9579-17	1.625	.315- .375	11.63
MS9579-18	1.688	.378- .438	11.92
MS9579-19	1.750	.440- .500	12.22
MS9579-20	1.875	.565- .625	12.81
MS9579-21	2.000	.690- .750	13.41
MS9579-22	2.125	.815- .875	14.00
MS9579-23	2.250	.940-1.000	14.61

PART NO.	L	K	APPROX WEIGHT LB/100
MS9579-24	2.375	1.065-1.125	15.21
MS9579-25	2.500	1.190-1.250	15.82
MS9579-26	2.625	1.315-1.375	16.42
MS9579-27	2.750	1.440-1.500	17.01
MS9579-28	2.875	1.565-1.625	17.61
MS9579-29	3.000	1.690-1.750	18.22
MS9579-30	3.125	1.815-1.875	18.83
MS9579-31	3.250	1.940-2.000	19.43
MS9579-32	3.375	2.065-2.125	20.04
MS9579-33	3.500	2.190-2.250	20.65
MS9579-34	3.625	2.315-2.375	21.26
MS9579-35	3.750	2.440-2.500	21.86
MS9579-36	3.875	2.565-2.625	22.47
MS9579-37	4.000	2.690-2.750	23.07
MS9579-38	4.125	2.815-2.875	23.68
MS9579-39	4.250	2.940-3.000	24.29
MS9579-40	4.375	3.065-3.125	24.89
MS9579-41	4.500	3.190-3.250	25.50
MS9579-42	4.625	3.315-3.375	26.11
MS9579-43	4.750	3.440-3.500	26.71

PART NO.	L	K	APPROX WEIGHT LB/100
MS9579-44	4.875	3.565-3.625	27.32
MS9579-45	5.000	3.690-3.750	27.92
MS9579-46	5.125	3.815-3.875	28.53
MS9579-47	5.250	3.940-4.000	29.13
MS9579-48	5.375	4.065-4.125	29.74
MS9579-49	5.500	4.190-4.250	30.35
MS9579-50	5.625	4.315-4.375	30.95
MS9579-51	5.750	4.440-4.500	31.56
MS9579-52	5.875	4.565-4.625	32.16
MS9579-53	6.000	4.690-4.750	32.77
MS9579-54	1.812	.502- .562	12.52
MS9579-55	1.938	.628- .688	13.12

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .012 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. FINISH: SILVER PLATE AMS 2411 .0002-.0006 THICK AT THREAD PD. DIMENSIONS SPECIFIED ARE AFTER PLATING. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
7. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
8. MANUFACTURING SPECIFICATION: AMS 7477.
9. FLUORESCENT PENETRANT INSPECTION PER AMS 2645 BEFORE PLATING.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

© REINSTATED AFTER 27 JUN 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 16 Dec 65 — REVISED (A) 17 Nov 69 — (B) 21 DEC 83 (C) 27 JUN 84

User activities:

Review activities:
© AIR FORCE—82
DLA—IS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AS ©	TITLE	MILITARY STANDARD
Other Cust AV 99	BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, AMS 5731, SILVER PLATED, .500-20 UNJF-3A	MS9579
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	PAGE 1 OF 1

DD FORM SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306 — 0843

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.