
MS9756 (ASG)

FED SUP CLASS 5306

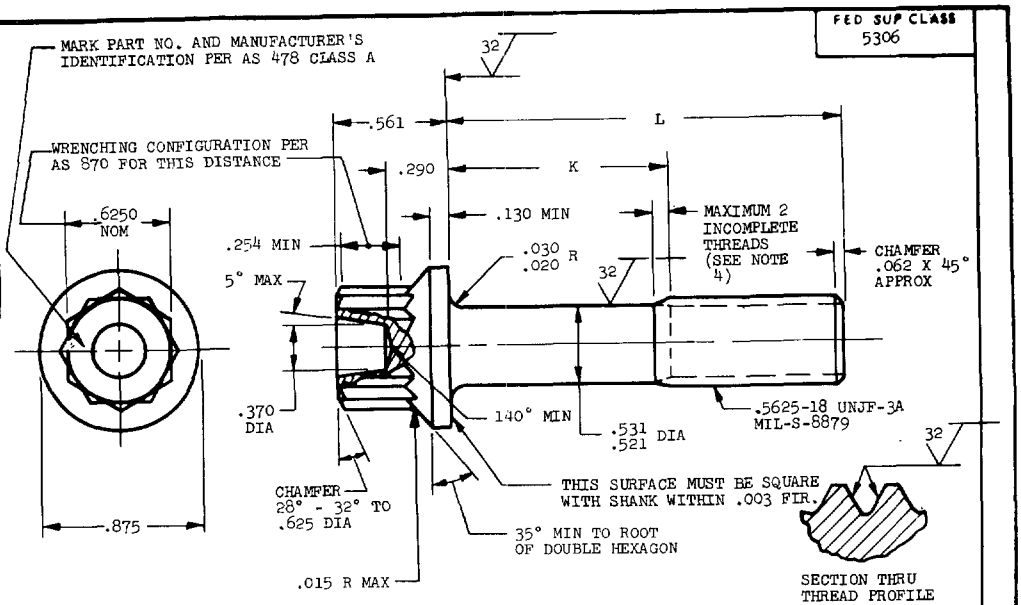

PART NO.	L	K	APPROX WEIGHT LB/100
MS9756-04	.875	.113-.133	6.54
MS9756-05	.938	.113-.133	6.76
MS9756-06	1.000	.113-.133	6.97
MS9756-07	1.062	.113-.133	7.19
MS9756-08	1.125	.113-.133	7.40
MS9756-09	1.188	.113-.133	7.62
MS9756-10	1.250	.113-.133	7.84
MS9756-11	1.312	.113-.133	8.05
MS9756-12	1.375	.113-.133	8.27
MS9756-13	1.438	.113-.133	8.48
MS9756-14	1.500	.113-.133	8.70
MS9756-15	1.562	.128-.188	8.92
MS9756-16	1.625	.190-.250	9.13
MS9756-17	1.688	.252-.312	9.35
MS9756-18	1.750	.315-.375	9.56
MS9756-19	1.812	.378-.438	9.78
MS9756-20	1.875	.440-.500	10.00
MS9756-21	2.000	.565-.625	10.43

PART NO.	L	K	APPROX WEIGHT LB/100
MS9756-22	2.125	.690- .750	10.86
MS9756-23	2.250	.815- .875	11.29
MS9756-24	2.375	.940-1.000	11.72
MS9756-25	2.500	1.065-1.125	12.16
MS9756-26	2.625	1.190-1.250	12.59
MS9756-27	2.750	1.315-1.375	13.02
MS9756-28	2.875	1.440-1.500	13.45
MS9756-29	3.000	1.565-1.625	13.88
MS9756-30	3.125	1.690-1.750	14.32
MS9756-31	3.250	1.815-1.875	14.75
MS9756-32	3.375	1.940-2.000	15.18
MS9756-33	3.500	2.065-2.125	15.61
MS9756-34	3.625	2.190-2.250	16.04
MS9756-35	3.750	2.315-2.375	16.48
MS9756-36	3.875	2.440-2.500	16.91
MS9756-37	4.000	2.565-2.625	17.34
MS9756-38	4.125	2.690-2.750	17.77
MS9756-39	4.250	2.815-2.875	18.20

PART NO.	L	K	APPROX WEIGHT LB/100
MS9756-40	4.375	2.940-3.000	18.64
MS9756-41	4.500	3.065-3.125	19.07
MS9756-42	4.625	3.190-3.250	19.50
MS9756-43	4.750	3.315-3.375	19.93
MS9756-44	4.875	3.440-3.500	20.36
MS9756-45	5.000	3.565-3.625	20.80
MS9756-46	5.125	3.690-3.750	21.23
MS9756-47	5.250	3.815-3.875	21.66
MS9756-48	5.375	3.940-4.000	22.09
MS9756-49	5.500	4.065-4.125	22.52
MS9756-50	5.625	4.190-4.250	22.96
MS9756-51	5.750	4.315-4.375	23.39
MS9756-52	5.875	4.440-4.500	23.82
MS9756-53	6.000	4.565-4.625	24.25

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .013 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: TITANIUM AMS 4967.
6. HARDNESS: ROCKWELL C36-42.
7. MANUFACTURING SPECIFICATION: AMS 7461, EXCEPT MATERIAL AS NOTED.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED May 67 REVISED

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF-82, 85

P.A. USAF - 11
Other Cust Navy - AS

TITLE: BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, TITANIUM AMS 4967, .5625-18 UNJF-3A

MILITARY STANDARD
MS9756 (ASG)
SHEET 1 OF 1

PROCUREMENT SPECIFICATION

SUPERSEDES:

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project No. 5306-F063

☆ U.S. GOVERNMENT PRINTING OFFICE: 1969-341-518/A-5339

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.