


FED. SUP CLASS
5935

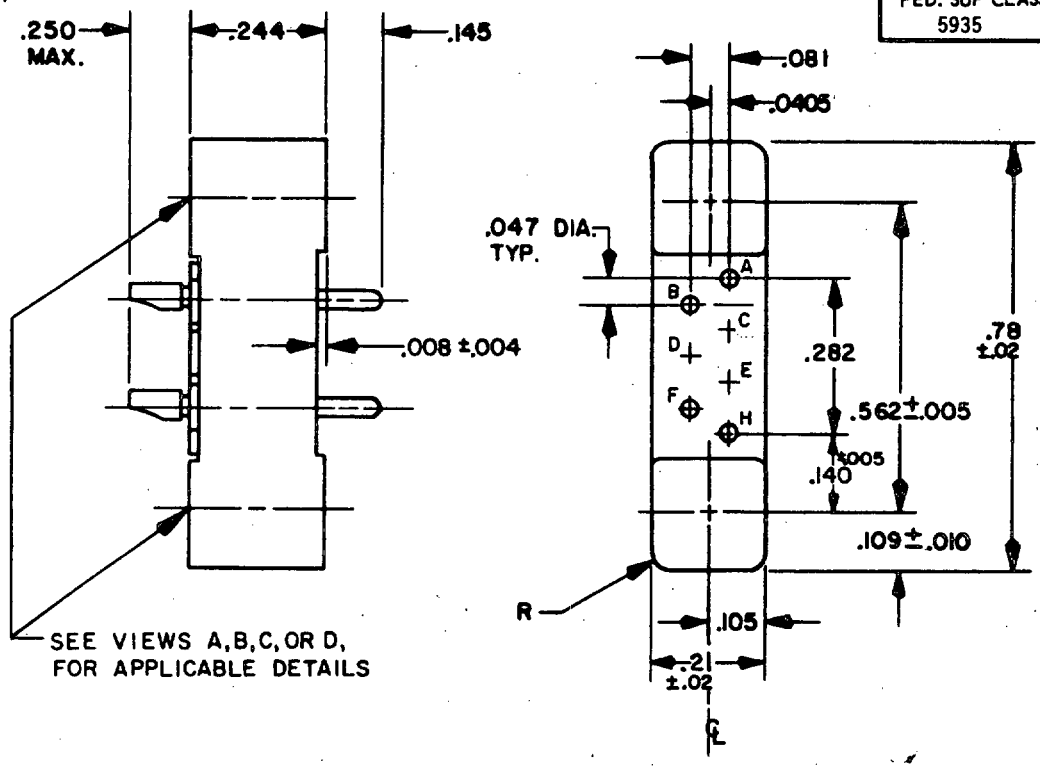

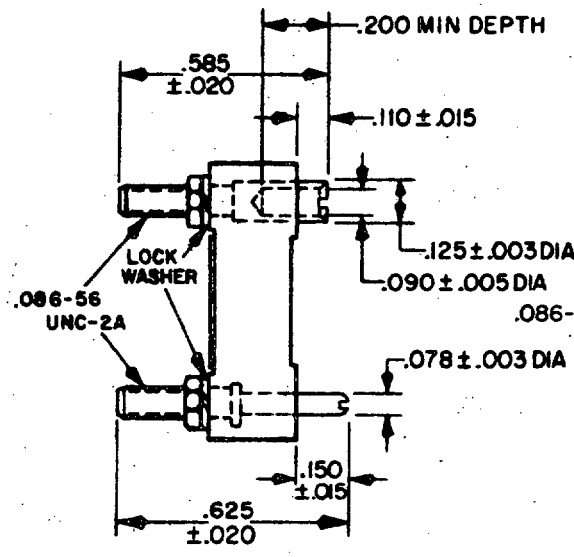

VIEW A: WITH GUIDEPINS

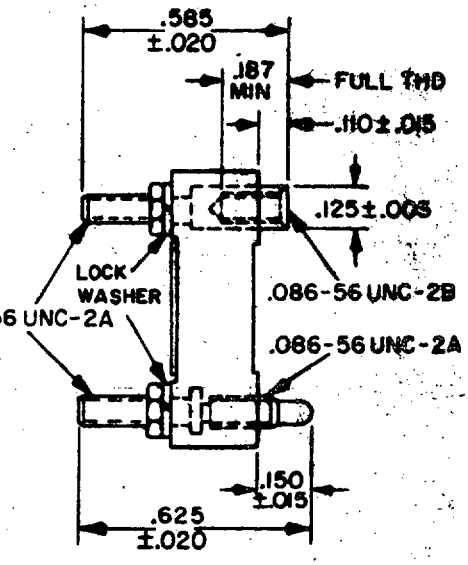

VIEW B: WITH FIXED JACKSCREWS

Ⓒ DENOTES CHANGE

P.A. Navy - EC Other Cust AF - 85 Army - CR	International Interest	TITLE CONNECTOR, RECTANGULAR, ELECTRICAL RACK AND PANEL 7 SIZE 22 SOLDER PIN CONTACTS	MILITARY STANDARD MS14014
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 1 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-3135-3

User activities: Army - ME, AM, AR
Navy - MC, OS
Air Force - OS

Review activities: Army - MI, AT
Navy - AS, SH
Air Force - 11, 99
DLA - ES

APPROVED 20 May 1970 REVISED Ⓒ 3 APR 78 Ⓒ 28 JAN 80

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - ME, AM, AR
Navy - MC; OS
Air Force -


Review activities: Army - MI, AT
Navy - AS; SH
Air Force -
DLA - ES

11, 99


FED. SUP CLASS
5935

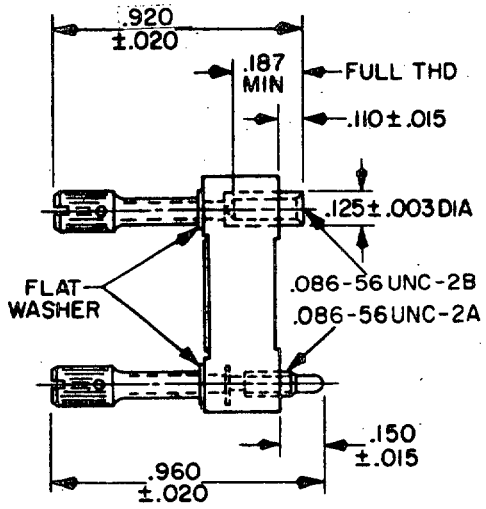


VIEW C: WITH SHORT TURNABLE JACKSCREWS



OPTIONAL CLAMP
CONFIGURATION



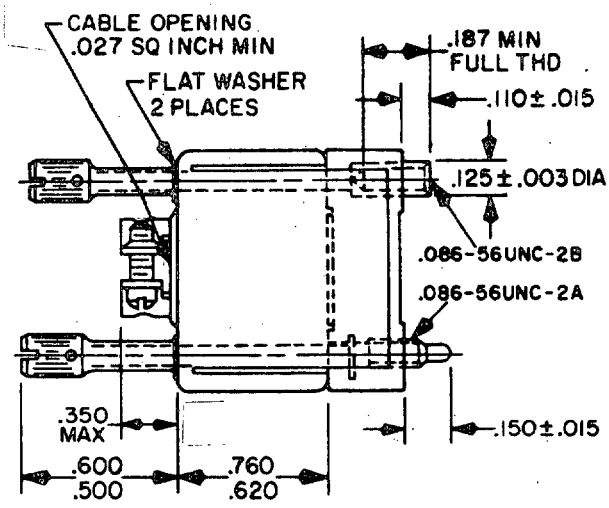

VIEW D: WITH LONG TURNABLE JACKSCREWS AND SHIELD

APPROVED 20 May 1970 REVISED (C) For changes see page 3

P.A. Navy - EC Other Cust AF - 85 Army - CR	International interest	TITLE CONNECTOR, RECTANGULAR, ELECTRICAL RACK AND PANEL 7 SIZE 22 SOLDER PIN CONTACTS	MILITARY STANDARD MS14014
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.090	2.29	.250	6.35
.004	.10	.105	2.67	.282	7.16
.005	.13	.109	2.77	.350	8.89
.008	.20	.110	2.79	.500	12.70
.010	.25	.125	3.18	.562	14.27
.015	.38	.140	3.56	.585	14.86
.02	.5	.145	3.68	.600	15.24
.020	.51	.150	3.81	.620	15.75
.027	.69	.187	4.75	.625	15.88
.0405	1.029	.200	5.08	.760	19.30
.047	1.19	.21	5.3	.78	19.8
.078	1.98	.210	5.33	.920	23.37
.081	2.06	.244	6.20	.960	24.38

DESIGN STANDARD FOR USE WITH MIL-C-28748/7.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions and configuration shall be in accordance with the above figure.
4. Unless otherwise specified, tolerances are ±.02 (.5 mm) for two place decimals and ±.015 (.38 mm) for three place decimals.
5. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
6. Contact letter identification may be located on either side of the contact hole. All letters shall appear on the front and rear face of each insert.
7. Inserts shall be used with guide pin assemblies or jackscrew assemblies.
8. Insert material: Shall be in accordance with MIL-C-28748.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Reference documents shall be of the issue in effect on date of invitation for bid.
11. Cable clamp configuration has optional mounting method.
12. (C) Material for jackscrews and guidepins: Corrosion resistance steel per specification QQ-S-763 or ASTM-A582, class 302, 303, 303SE, 304, or 316 except knobs, washers, and spacers shall be either aluminum alloy or corrosion resistance steel. Finish for jackscrews and guidepins: Passivated per QQ-P-35 except knobs, washers, and spacers shall be passivated or anodized.

APPROVED 20 May 1970 REVISED (C) For changes see page 3

User activities: Army - ME, AM, AR
Navy - WC, OS
Air Force -

Review activities: Army - MI, AT
Navy - AS, SH
Air Force - 11, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - EC Other Cust AF - 85 Army - CR	International Interest	TITLE CONNECTOR, RECTANGULAR, ELECTRICAL RACK AND PANEL 7 SIZE 22 SOLDER PIN CONTACTS	MILITARY STANDARD MS14014
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3136-3

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980 0 — 603-121/1133

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.