FED. SUP CLASS
5935

User activities: Army ME, AM, WC
Navy MC
Air Force

Reviewer activities: Army MI, Mu, AT
Navy AS, SH, OS
Air Force 11
DSA-ES

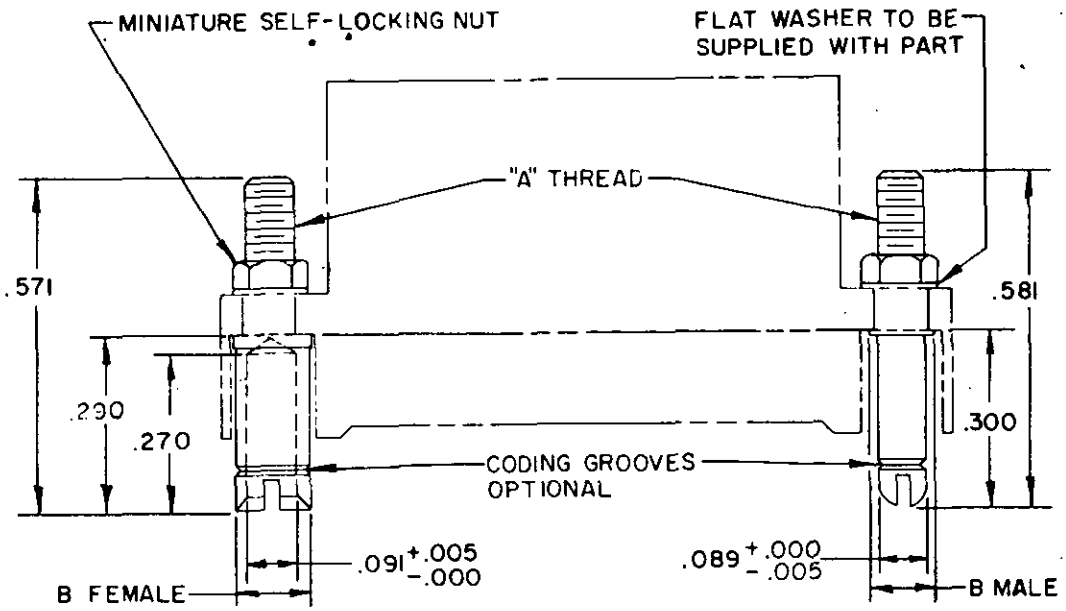

MS part no	Connector size (No of contacts)	Style	A thread	B dia max
-1	4 thru 50	Male	2-56UNC-2A	.140
-2	4 thru 50	Female	2-56UNC-2A	.140

CANCELED AFTER 4 AUGUST 1972

NO SUPERSEDING STANDARD

(A) 4 August 1972 REVISED

APPROVED 20 May 1970

INCHES	MM	INCHES	MM
.005	.13	.270	6.86
.016	.41	.290	7.37
.089	2.26	.300	7.62
.091	2.31	.571	14.50
.140	3.56	.581	14.76

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016.
4. Washer .031 thick, supplied with all sizes, not used with shields.
5. Lubricant: Solid film lubricant on 'A' thread.
6. Material: Corrosion resistant steel per specification QQ-S-763 or QQ-S-764, class 302, 303, 303Se, 304 or 316.
7. Finish: Passivated per QQ-P-35.
8. Packaging: Parts to be bagged disassembled.
9. Referenced documents shall be of the issue in effect on date of invitation for bid.
10. For design feature purposes, this standard takes precedence over procurement documents specified herein.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - EC Other Cust. AF - 11 Army - EL	International interest	TITLE GUIDE PIN, ELECTRICAL, CONNECTOR, MALE & FEMALE	MILITARY STANDARD MS14032
Procurement Specification MIL-C- 28748		SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1972-714-537/1141

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.