This military standard is approved for use by the Naval Elec. Systems Cmd. Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

DD FORM 1 MAY 73 672 (LIMITED COORDINATION)

P.A. Navy - EC
Other Cust

Procurement Specifications: NONE


INTERNATIONAL INTEREST

SUPERSEDES: Drawing 2826483, Code Ident 10001

TITLE: HOUSING, CONNECTOR, CASTING AND MACHINERY

MILITARY STANDARD MS14062(NAVY)

PAGE 1 OF 3

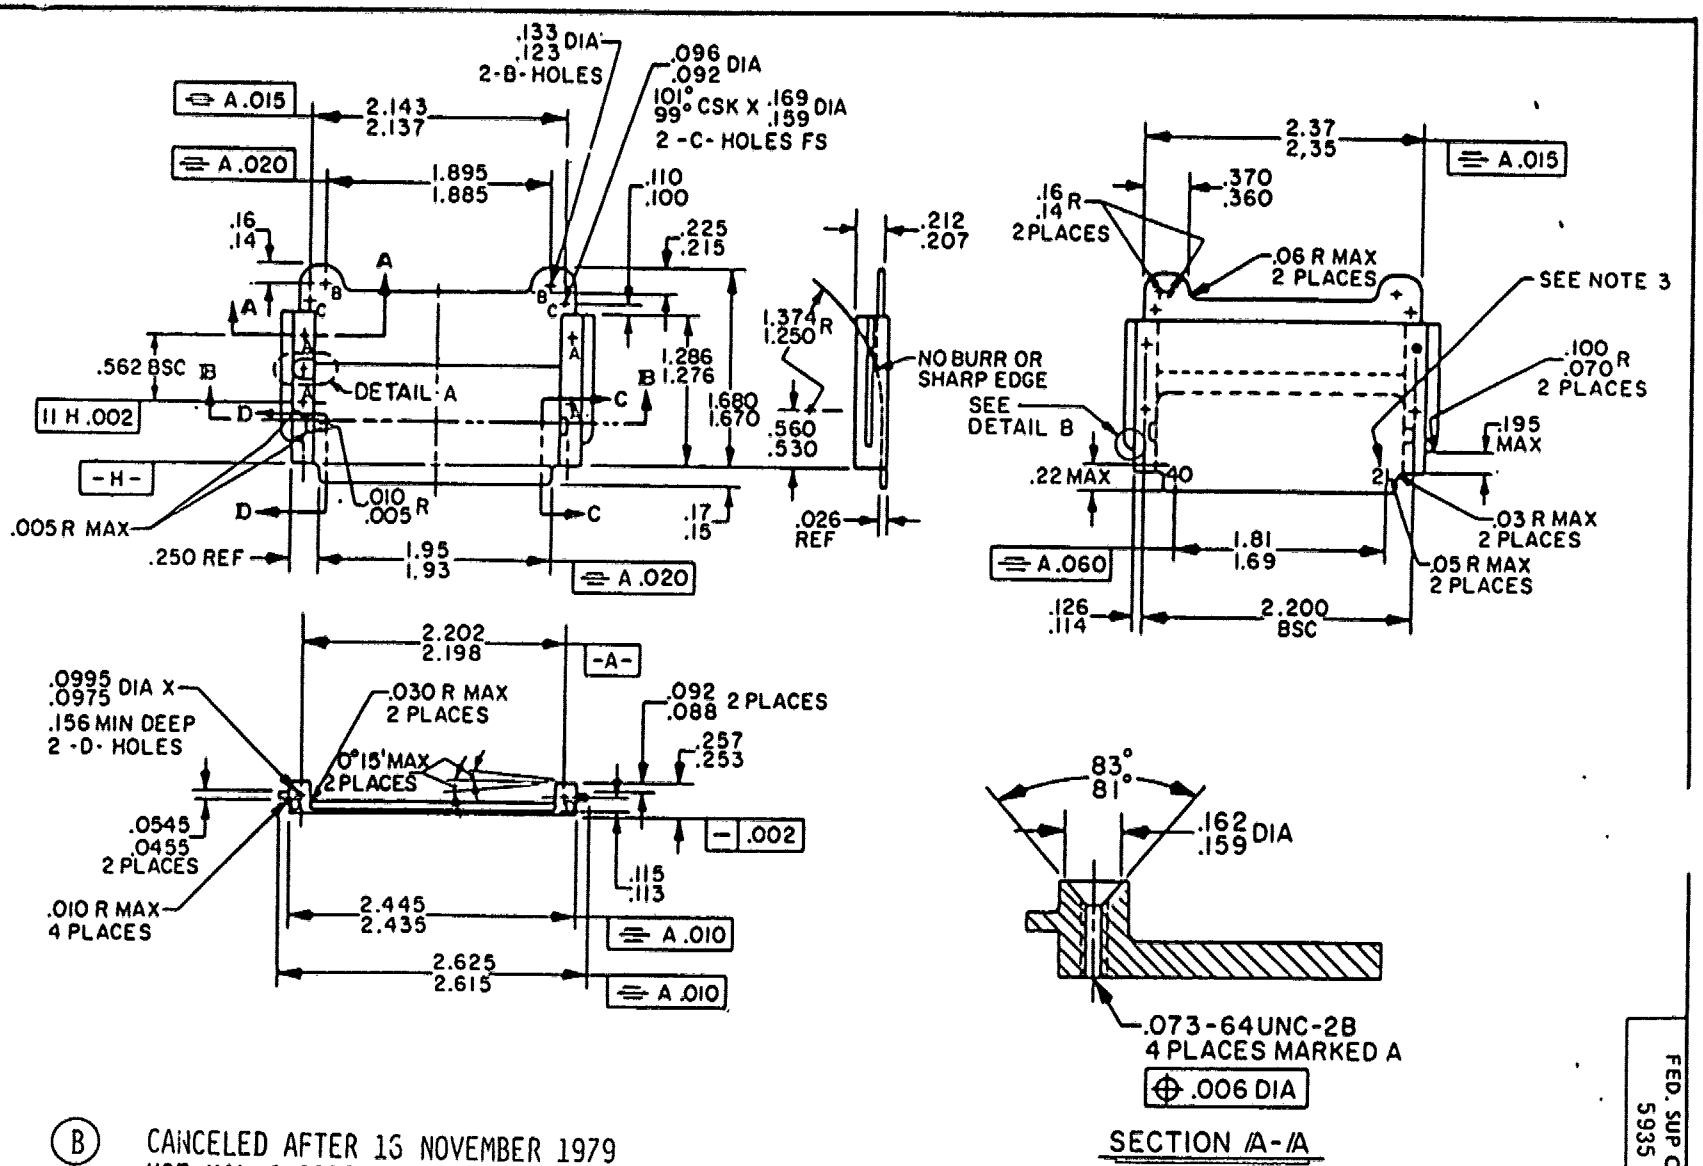


(B) CANCELED AFTER 16 NOVEMBER 1979
USE MIL-C-28754/49

FED. SUP CLASS 5935


APPROVED 4 Sep 1975 REVISED (A) 16 Apr 76 (B) 16 NOV 79

Source: public.cr.navy.mil, Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.


FED SUP CLASS
5935

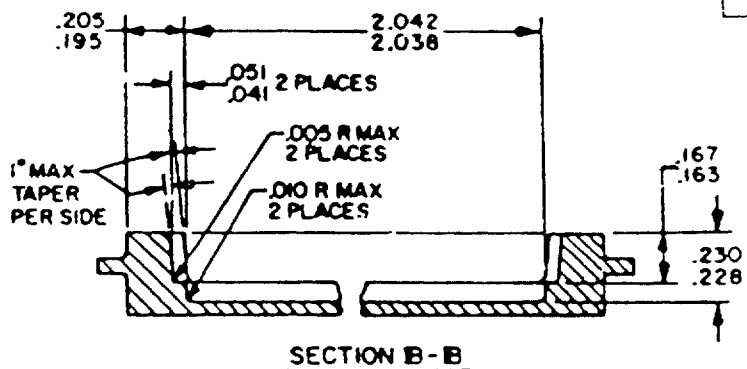


SECTION B-B

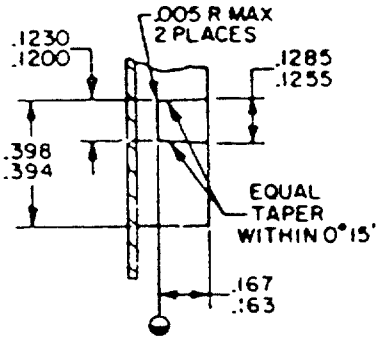


SECTION C-C

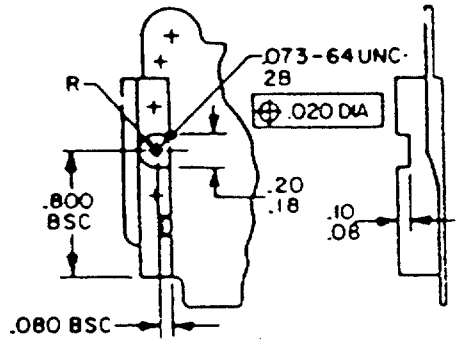

DETAIL A

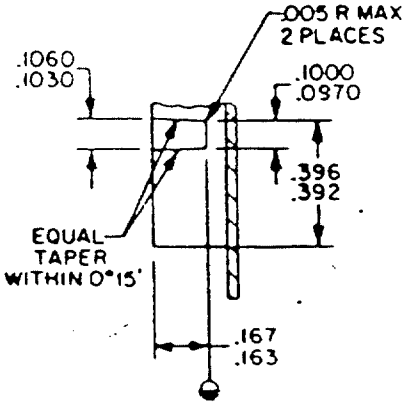

SECTION D-D

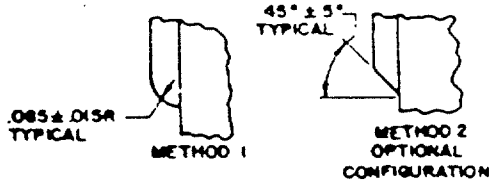

DETAIL B

APPROVED 4 Sep 1975 REVISED (A) FOR CHANGE SEE PAGE 3

This military standard is approved for use by the Naval Elec. Systems Cmd. Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Navy - EC		HOUSING, CONNECTOR, CASTING AND MACHINERY	MS14062(NAVY)
Procurement Specifications: NONE	SUPERSEDES: Drawing 2826483, Code Ident 10001		PAGE 2 OF 3

DD FORM 672 (LIMITED COORDINATION) PREVIOUS EDITIONS ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DESIGN STANDARD FOR USE WITH MIL-C-28754/17 (A)

NOTES:
1. Dimensions are in inches.
2. Material: ASTM B85 alloy SC 84A or QQ-A-591 alloy 360
3. Marking and finish: Per table I.
4. Cast finish 125.
5. Unless otherwise specified, corner radii .020 R maximum and corner fillets .020 R maximum.
6. ◒ Two surfaces to be in line within .002.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

TABLE I. Finish and marking.

Type	Finish	Marking	With detail A
A	Anodize per MIL-A-8625, type 2, dyed black.	Mark characters .06 inch high with white epoxy ink per MIL-C-28754	No
B	Anodize per MIL-A-8625, type 2, dyed red. Coat detail E per MIL-C-5541 class 3, type and grade optional.	Mark characters .06 inch high with black epoxy ink per MIL-C-28754	Yes
C	Anodize per MIL-A-8625, type 2, dyed black. Coat detail E per MIL-C-5541 class 3, type and grade optional.	Mark characters .06 inch high with white epoxy ink per MIL-C-28754	Yes

APPROVED 4 Sep 1975 REVISED (A) FOR CHANGE SEE PAGE 3

Navy - EC	INTERNATIONAL INTEREST	TITLE: HOUSING, CONNECTOR, CASTING AND MACHINERY	MILITARY STANDARD MS14062(NAVY)
NONE	SUPERSEDES: Drawing 2826483, Code Ident 10001		PAGE 3 OF 3

DD FORM 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

This military standard is approved for use by the Naval Elec. Systems Cmd. Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.