INCH-POUND

MS17344G
16 January 2013
SUPERSEDING
MS17344F
26 October 2005

# DETAIL SPECIFICATION SHEET

## CONNECTOR, PLUG, ELECTRICAL, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

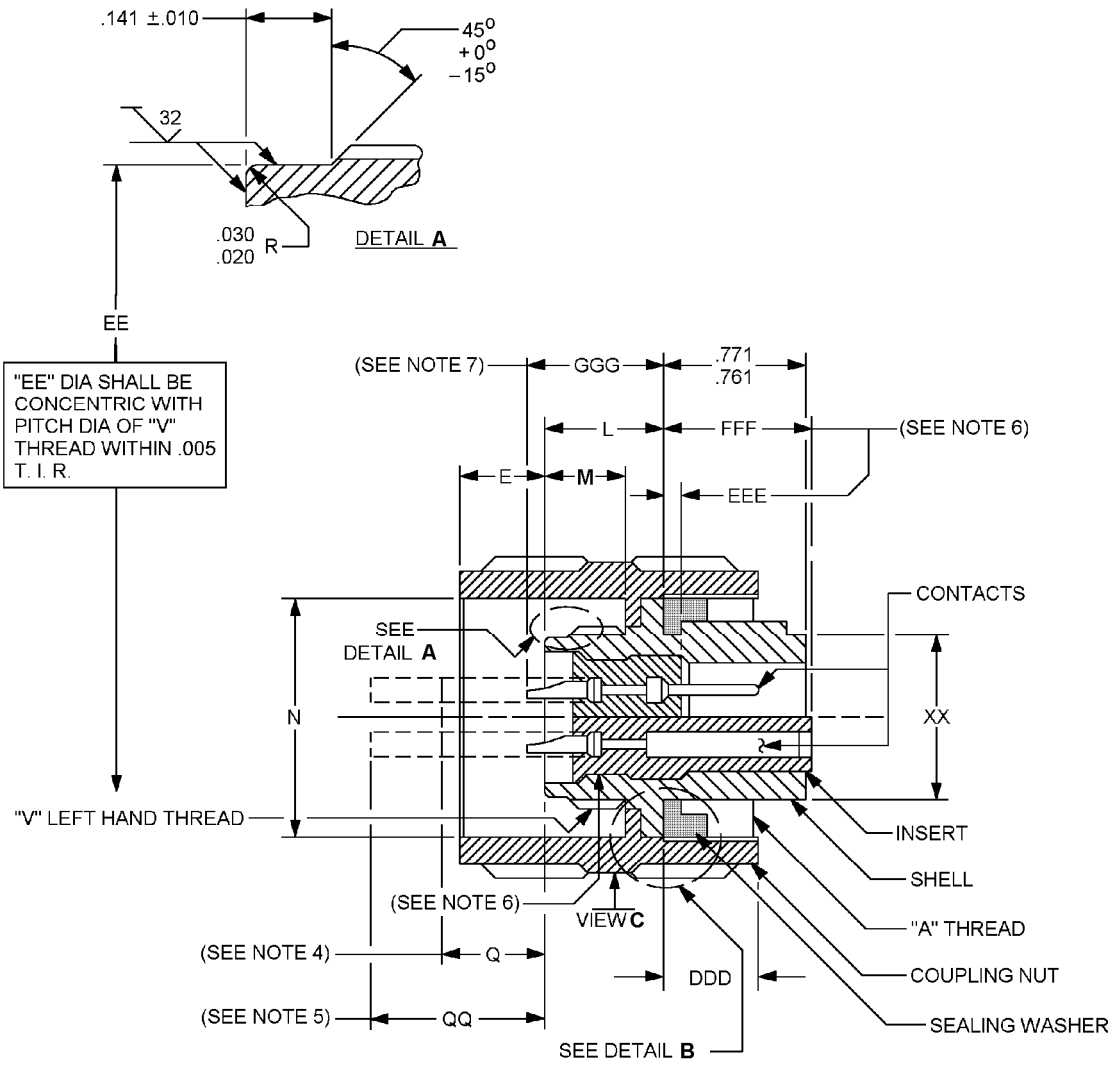



FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

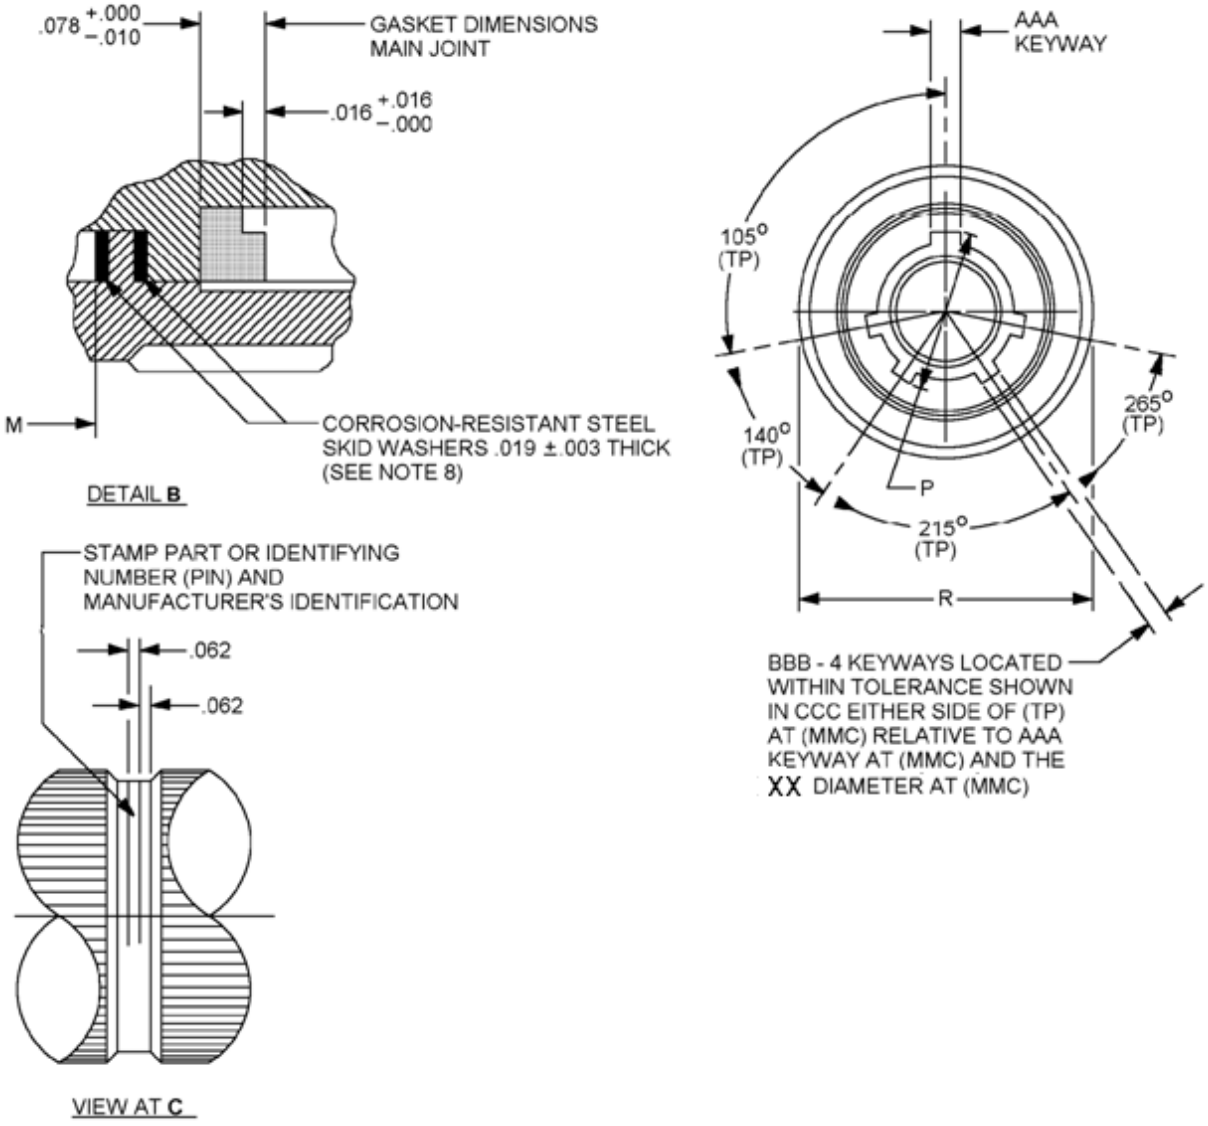



FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Shell size | A Thread (plated) class 2B | E max | L + .011 - .010 | M ± .031 |
|---|---|---|---|---|
| 12 | 0.8750-0.1P-0.2L-DS | .100 | .738 | .529 |
| 14 | 1.0000-0.1P-0.2L-DS | | | |
| 16 | 1.1250-0.1P-0.2L-DS | .150 | | |
| 18 | 1.2500-0.1P-0.2L-DS | .275 | | |
| 20 | 1.3750-0.1P-0.2L-DS | | | |
| 22 | 1.5000-0.1P-0.2L-DS | | | |
| 24 | 1.7500-0.1P-0.2L-DS | | .800 | |
| 28 | 2.0000-0.1P-0.2L-DS | | | |
| 32 | 2.2500-0.1P-0.2L-DS | | .875 | |
| 36 | 2.5000-0.1P-0.2L-DS | .300 | | |
| 40 | 2.7500-0.1P-0.2L-DS | .100 | 1.041 | .717 |
| 44 | 3.0000-0.1P-0.2L-DS | .109 | | |

| Shell size | N + .010 - .001 | P + .010 - .005 | Q max | QQ max | R dia max |
|---|---|---|---|---|---|
| 12 | .985 | .627 | .477 | --- | 1.156 |
| 14 | 1.109 | .752 | | 1.027 | 1.281 |
| 16 | 1.235 | .877 | | | 1.469 |
| 18 | 1.359 | 1.002 | | | 1.563 |
| 20 | 1.485 | 1.128 | | | 1.688 |
| 22 | 1.609 | 1.252 | | | 1.844 |
| 24 | 1.859 | 1.453 | | .967 | 2.094 |
| 28 | 2.109 | 1.672 | | | 2.344 |
| 32 | 2.359 | 1.922 | .342 | .892 | 2.594 |
| 36 | 2.609 | 2.141 | | | 2.844 |
| 40 | 2.922 | 2.391 | | | 3.156 |
| 44 | 3.172 | 2.672 | NA | NA | 3.406 |

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Shell size | V Thread (plated) class 2A LH | EE dia + .001 - .007 | XX dia + .010 - .006 | AAA | BBB |
|---|---|---|---|---|---|
| 12 | .7500-20 UNEF | .672 | .647 | .115 +.001, -.007 | .047 +.001, -.007 |
| 14 | .8750-20 UNEF | .797 | .674 | | |
| 16 | 1.0000-20 UNEF | .922 | .897 | .172 +.001, -.010 | .078 +.001, -.010 |
| 18 | 1.1250-18 UNEF | 1.040 | .929 | | |
| 20 | 1.2500-18 UNEF | 1.164 | 1.052 | | |
| 22 | 1.3750-18 UNEF | 1.289 | 1.177 | | |
| 24 | 1.6250-18 UNEF | 1.539 | 1.302 | .250 +.001, -.010 | .125 +.001, -.010 |
| 28 | 1.8750-16 UN | 1.780 | 1.522 | | |
| 32 | 2.0625-16 UN | 1.967 | 1.772 | | |
| 36 | 2.3125-16 UN | 2.217 | 1.982 | | |
| 40 | 2.6250-16 UN | 2.530 | 2.232 | | |
| 44 | 2.8750-16 UN | 2.780 | 2.522 | | |

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Shell size | CCC | DDD | EEE pin insert location ± .030 | FFF socket insert location ± .030 | GGG max |
|---|---|---|---|---|---|
| 12 | .0035 | .655 .593 | .084 | .793 | .898 |
| 14 | | | | | |
| 16 | .007 | | | | |
| 18 | | | | | |
| 20 | | | | | |
| 22 | | | | | |
| 24 | | | | | |
| 28 | | | | | |
| 32 | | .677 .610 | | | |
| 36 | | .701 .634 | | | |
| 40 | | .679 .618 | | | |
| 44 | | | .049 | .774 | 1.062 |

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .300 | 7.62 | .875 | 22.22 | 1.302 | 33.07 | 2.141 | 54.38 |
| .003 | 0.08 | .342 | 8.69 | .877 | 22.28 | 1.359 | 34.52 | 2.217 | 56.31 |
| .0035 | 0.09 | .417 | 10.59 | .892 | 22.66 | 1.375 | 34.93 | 2.232 | 56.70 |
| .005 | 0.13 | .477 | 12.12 | .898 | 22.81 | 1.453 | 33.91 | 2.250 | 57.15 |
| .006 | 0.15 | .529 | 13.44 | .922 | 23.42 | 1.469 | 37.31 | 2.3125 | 58.74 |
| .007 | 0.18 | .554 | 14.07 | .929 | 23.60 | 1.485 | 37.72 | 2.344 | 59.54 |
| .010 | 0.25 | .593 | 15.06 | .967 | 24.56 | 1.500 | 38.10 | 2.359 | 59.92 |
| .011 | 0.28 | .610 | 15.49 | .985 | 25.02 | 1.522 | 38.66 | 2.391 | 60.73 |
| .016 | 0.41 | .618 | 15.70 | 1.000 | 25.40 | 1.539 | 39.09 | 2.500 | 63.50 |
| .019 | 0.48 | .627 | 15.93 | 1.002 | 25.45 | 1.563 | 39.70 | 2.522 | 34.06 |
| .020 | 0.51 | .655 | 16.64 | 1.027 | 26.09 | 1.609 | 40.87 | 2.530 | 64.26 |
| .030 | 0.76 | .672 | 17.07 | 1.040 | 26.42 | 1.625 | 41.28 | 2.594 | 65.89 |
| .031 | 0.79 | .674 | 17.12 | 1.041 | 26.44 | 1.672 | 42.47 | 2.625 | 66.70 |
| .047 | 1.19 | .677 | 17.20 | 1.052 | 26.72 | 1.688 | 42.88 | 2.629 | 66.78 |
| .049 | 1.24 | .679 | 17.25 | 1.062 | 26.97 | 1.750 | 44.46 | 2.672 | 67.87 |
| .062 | 1.57 | .701 | 17.81 | 1.109 | 28.17 | 1.772 | 45.01 | 2.750 | 69.85 |
| .078 | 1.98 | .717 | 18.21 | 1.125 | 28.60 | 1.780 | 45.21 | 2.844 | 72.24 |
| .084 | 2.13 | .738 | 18.75 | 1.128 | 28.65 | 1.844 | 46.84 | 2.875 | 73.04 |
| .100 | 2.54 | .750 | 19.05 | 1.156 | 29.36 | 1.859 | 48.22 | 2.922 | 74.22 |
| .109 | 2.77 | .752 | 19.10 | 1.164 | 29.57 | 1.8750 | 47.625 | 3.000 | 76.20 |
| .115 | 2.92 | .761 | 19.33 | 1.177 | 29.90 | 1.9225 | 48.832 | 3.156 | 80.16 |
| .125 | 3.18 | .771 | 19.58 | 1.235 | 31.37 | 1.967 | 49.96 | 3.172 | 80.57 |
| .141 | 3.58 | .774 | 19.66 | 1.250 | 31.75 | 1.982 | 50.34 | 3.406 | 86.51 |
| .150 | 3.81 | .793 | 20.14 | 1.252 | 31.80 | 2.000 | 50.80 | | |
| .172 | 4.37 | .797 | 20.24 | 1.281 | 31.54 | 2.0625 | 52.40 | | |
| .250 | 6.35 | .800 | 20.32 | 1.289 | 32.74 | 2.096 | 53.24 | | |
| .275 | 6.99 | .804 | 20.42 | | | 2.109 | 53.57 | | |

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified tolerances are ± .016 inch (0.41 mm).
3. Metric equivalents are given for information only.
4. Maximum termination of grommet extension for sizes 12 and 16 contacts for class J.
5. Maximum termination of grommet extension for sizes 0, 4, and 8 contacts for class J.
6. Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.
7. Dimensions shall be 1.210 (30.73 mm) maximum to .920 (23.37 mm) minimum for size 0 contacts only.
8. Front and rear washers for sizes 32 and 36 only. Rear washers for sizes 40 and 44 only.

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.


Mates with receptacles shown on MS17343, MS17345 through MS17348, MS18062 and covers shown on MS17350.

Class shall be designated by the letter C (pressurized), J (pressurized with grommet) or R (environmental resisting).

For shell size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.

Shell finish: See MIL-DTL-22992.

Part or Identifying Number (PIN) example:

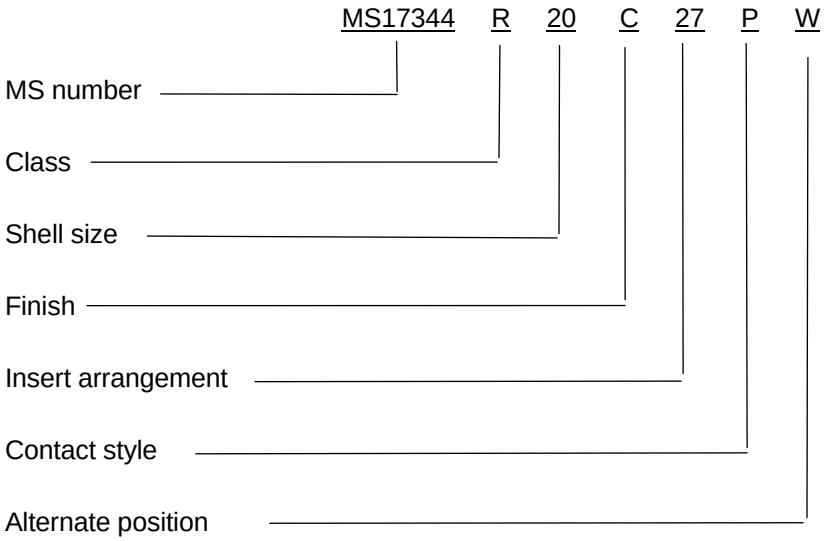


Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS17343
MS17345
MS17346
MS17347
MS17348
MS17350
MS18062
MIL-STD-1651



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS, SH, YD
Air Force – 19, 99
NASA – NA

(Project 5935–2012-180)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.