
FED SUP CLASS
5935

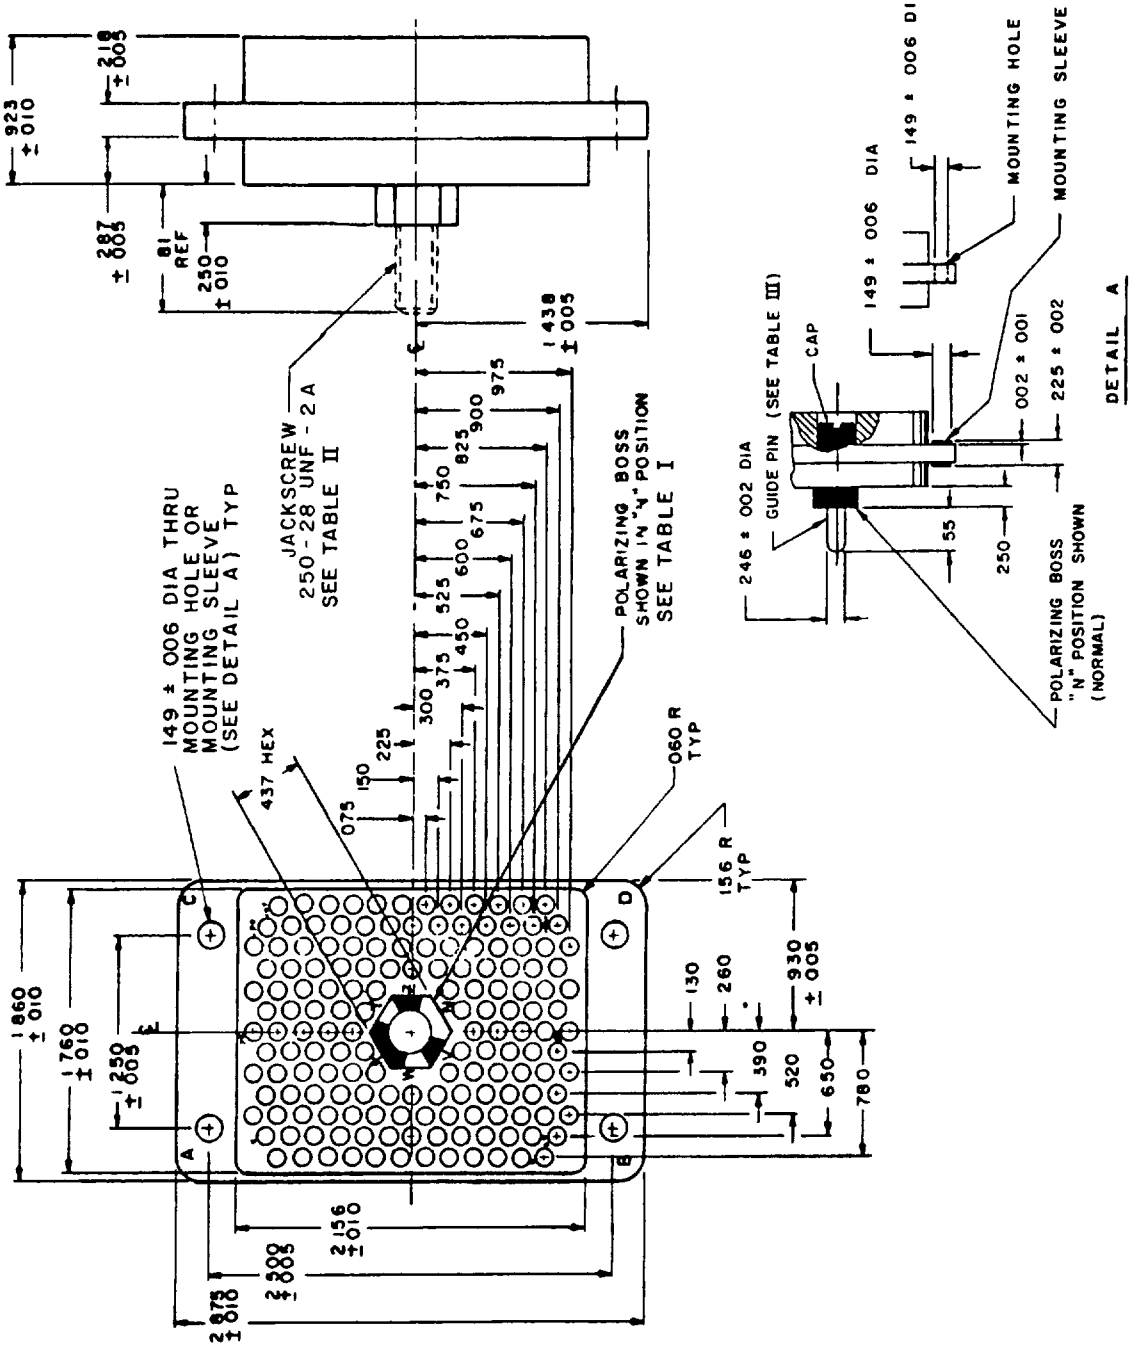

Design standard for use with MIL-C-28748/10

(B) Entire standard revised

P A Navy - EC Other Cus AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR) RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 158 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18166
Preferred Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-16

APPROVED 20 Dec 1965 REVISED (A) 20 May 1970 (B) 8 July 1976

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18166-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18166-1V	V (TYPE 1)	
MS 18166-1W	W (TYPE 1)	
MS 18166-1X	X (TYPE 2)	
MS 18166-1Y	Y (TYPE 2)	
MS 18166-1Z	Z (TYPE 2)	
MS 18166-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 250-28 UNF-2B
MS 18166-2V	V (TYPE 1)	
MS 18166-2W	W (TYPE 1)	
MS 18166-2X	X (TYPE 2)	
MS 18166-2Y	Y (TYPE 2)	
MS 18166-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18166-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18166-3V	V (TYPE 1)	
MS 18166-3W	W (TYPE 1)	
MS 18166-3X	X (TYPE 2)	
MS 18166-3Y	Y (TYPE 2)	
MS 18166-3Z	Z (TYPE 2)	
MS 18166-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ± .002 I D TO ACCEPT GUIDE PIN
MS 18166-4V	V (TYPE 1)	
MS 18166-4W	W (TYPE 1)	
MS 18166-4X	X (TYPE 2)	
MS 18166-4Y	Y (TYPE 2)	
MS 18166-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use still be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	525	13 34
002	05	550	13 97
005	13	600	15 24
006	15	650	16 51
.010	25	675	17 15
060	1 52	750	19 05
.075	1 91	780	19 81
130	3.30	810	20 57
149	3 78	825	20 96
150	3 81	900	22 86
156	3 96	923	23 44
218	5 54	930	23.62
.225	5 72	975	24 77
246	6 25	1 250	31 75
250	6 35	1 438	36 53
260	6 60	1 760	44 70
287	7 29	1 860	47 24
300	7 62	2 156	54 76
375	9 53	2 500	63 50
390	9 91	2 875	73 03
437	11 10		
450	11 43		
520	13 21		

NOTES

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 015 (.38 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18165 (pin body)
7. Dimensions symmetrical about centerlines.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Reference documents shall be of the issue in effect on date of invitation for bid.
10. Insert material shall be in accordance with MIL-C-28748
11. Flatness, squareness and parallelism shall be within dimensional tolerances.
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 148 pounds
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 10 inch pounds
15. Jackscrew wrench size 5/32 hex

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army MI, MU, AT
Navy AS, SH, OS
Air Force 11, 80
DSA - ES

Reviewer activities: Army, Navy MC, Air Force

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be from this document

P A Navy - EC Other Cus AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR) RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 158 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18166
Preferred Specification MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.