
FED SUP CLASS
5935

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

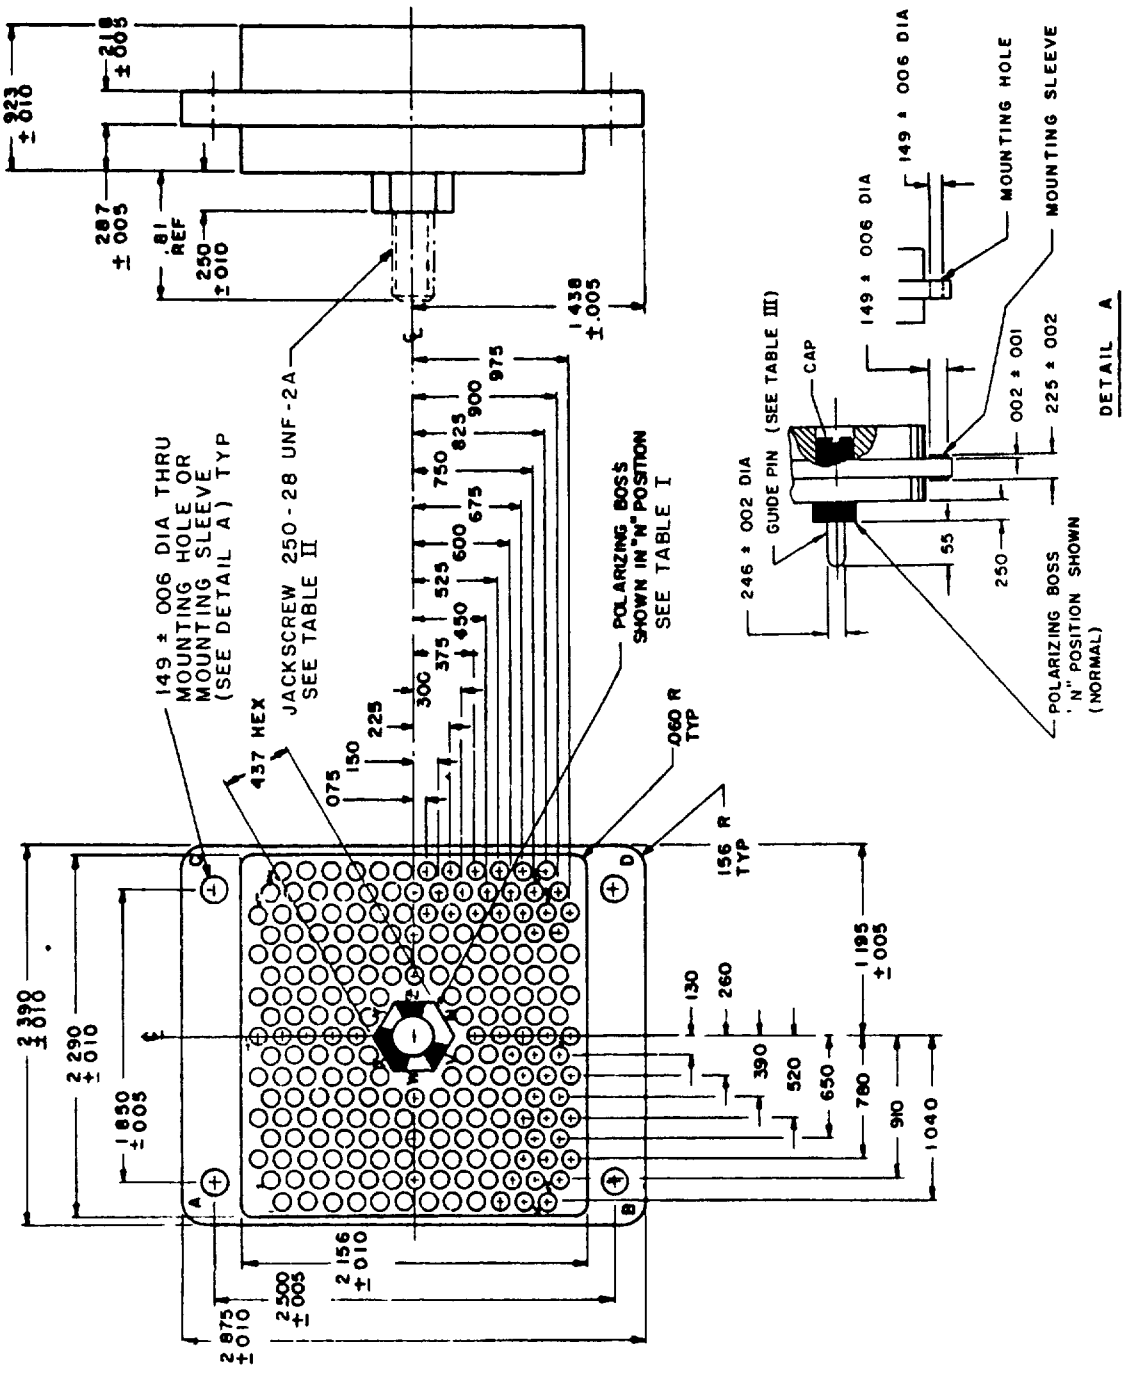

Design standard for use with MIL-C-28748/10

Ⓑ Entire standard revised

APPROVED 20 Dec 1965 REVISED Ⓐ 20 May 1970 Ⓑ 8 July 1976

P A Navy - EC Other Cus AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 212 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18168
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 3

DD FORM 672 (Cancels previous edition) 5935-2004-18

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] from [illegible] procurement

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

TYPE
SEE TABLE I




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18168-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18168-1V	V (TYPE 1)	
MS 18168-1W	W (TYPE 1)	
MS 18168-1X	X (TYPE 2)	
MS 18168-1Y	Y (TYPE 2)	
MS 18168-1Z	Z (TYPE 2)	
MS 18168-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 250-28 UNF-2B
MS 18168-2V	V (TYPE 1)	
MS 18168-2W	W (TYPE 1)	
MS 18168-2X	X (TYPE 2)	
MS 18168-2Y	Y (TYPE 2)	
MS 18168-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18168-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18168-3V	V (TYPE 1)	
MS 18168-3W	W (TYPE 1)	
MS 18168-3X	X (TYPE 2)	
MS 18168-3Y	Y (TYPE 2)	
MS 18168-3Z	Z (TYPE 2)	
MS 18168-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ± .002 I D TO ACCEPT GUIDE PIN
MS 18168-4V	V (TYPE 1)	
MS 18168-4W	W (TYPE 1)	
MS 18168-4X	X (TYPE 2)	
MS 18168-4Y	Y (TYPE 2)	
MS 18168-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

s military standard is approved for use by all Departments and Agencies of the Department
Defense. Selection for all new engineering and design applications and for repetitive use
ll be made from this document

P A Navy - EC Other Cust AF - 85 Army - EL	International Interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 212 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18168
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	525	13 34
002	05	550	13 97
005	13	600	15 24
006	15	650	16.51
.010	25	675	17 15
.060	1 52	750	19 05
.075	1 91	780	19 81
130	3 30	810	20 58
149	3 78	825	20 96
150	3 81	900	22 86
156	3 96	910	23 11
218	5 54	923	23 44
.225	5.72	975	24.77
.246	6 25	1 040	26 42
250	6.35	1 195	30 35
.260	6 60	1 438	36 53
287	7.29	1 850	46 99
300	7.62	2.156	54 76
375	9 53	2 290	58 17
390	9 91	2 390	60.71
437	11 10	2 500	63 50
450	11 43	2 875	73 03
520	13 21		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18167 (pin body).
7. Dimensions symmetrical about centerlines.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Reference documents shall be of the issue in effect on date of invitation for bid.
10. Insert material shall be in accordance with MIL-C-28748.
11. Flatness, squareness and parallelism shall be within dimensional tolerances
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 198 pounds.
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 13 inch pounds.
15. Jackscrew wrench size 5/32 hex.

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

Reviewer activities: Army MI, MU, AT
Navy AS, SH, OS
Air Force 11, 80
DSA - ES

Navy MC
Air Force

Defense Selection for all new engineering and design applications and for repetitive use
will be made from this document

P A Navy - EC Other Cust AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 212 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18168
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.