INCH-POUND
MS18192G
5 January 2011
SUPERSEDING
MS18192F
1 June 1983


DETAIL SPECIFICATION SHEET

SHIELD, ELECTRICAL CONNECTORS FOR 7, 9, 14, 20, 26, 34, 42, 50 AND 75 CONTACT CONNECTORS

Reinstated after 10 July 2009 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28748.

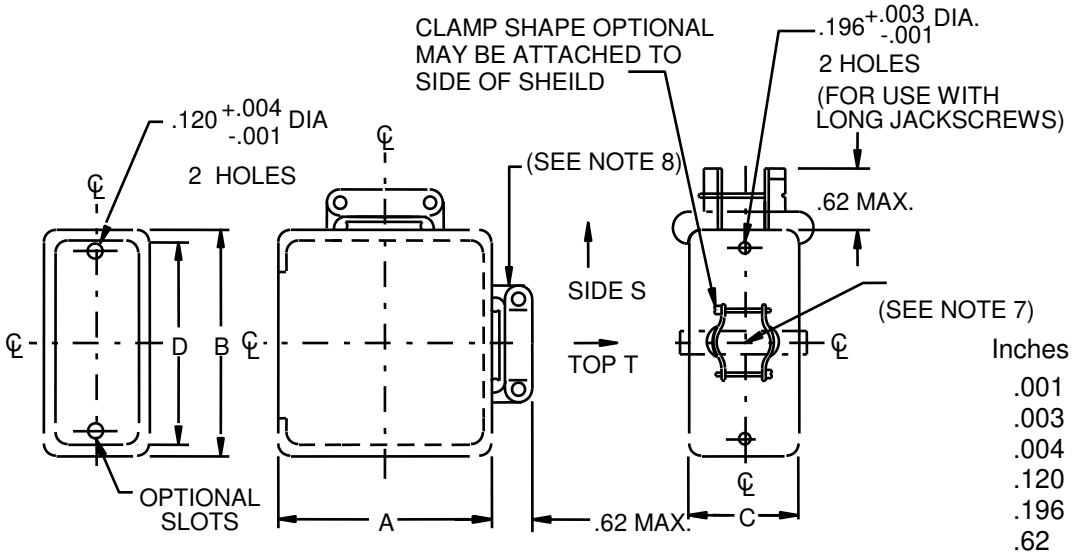


Inches	mm
.001	0.03
.003	0.08
.004	0.10
.120	3.05
.196	4.98
.62	15.75

Shield designator	Shield and shield clamp location	Connector size (number of contacts)	A min max	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	F Minimum cable opening square inch
MS18192-T7 MS18192-S7	top opening side opening	7	1.18 (29.97) 1.35 (34.29)	1.220 (30.99)	.437 (11.10)	.906 (23.01)	.18 (4.57)
MS18192-T8 MS18192-S8	top opening side opening	9	1.18 (29.97) 1.35 (34.29)	1.312 (33.32)	.437 (11.10)	1.000 (25.40)	.10 (2.54)
MS18192-T1 MS18192-S1	top opening side opening	14	1.18 (29.97) 1.35 (34.29)	1.250 (31.75)	.500 (12.70)	.938 (23.83)	.19 (4.83)
MS18192-T14 MS18192-S14	top opening side opening	18	1.18 (29.97) 1.35 (34.29)	1.190 (30.23)	.630 (16.00)	1.000 (25.40)	.22 (5.59)
MS18192-T2 MS18192-S2	top opening side opening	20	1.18 (29.97) 1.35 (34.29)	1.562 (39.67)	.500 (12.70)	1.250 (31.75)	.22 (5.59)
MS18192-T9 MS18192-S9	top opening side opening	26	1.18 (29.97) 1.35 (34.29)	1.625 (41.28)	.640 (16.26)	1.312 (33.32)	.22 (5.59)

FIGURE 1. Shields for 7, 9, 14, 18, 20, 26, 34, 42, 50, and 75 contact positions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

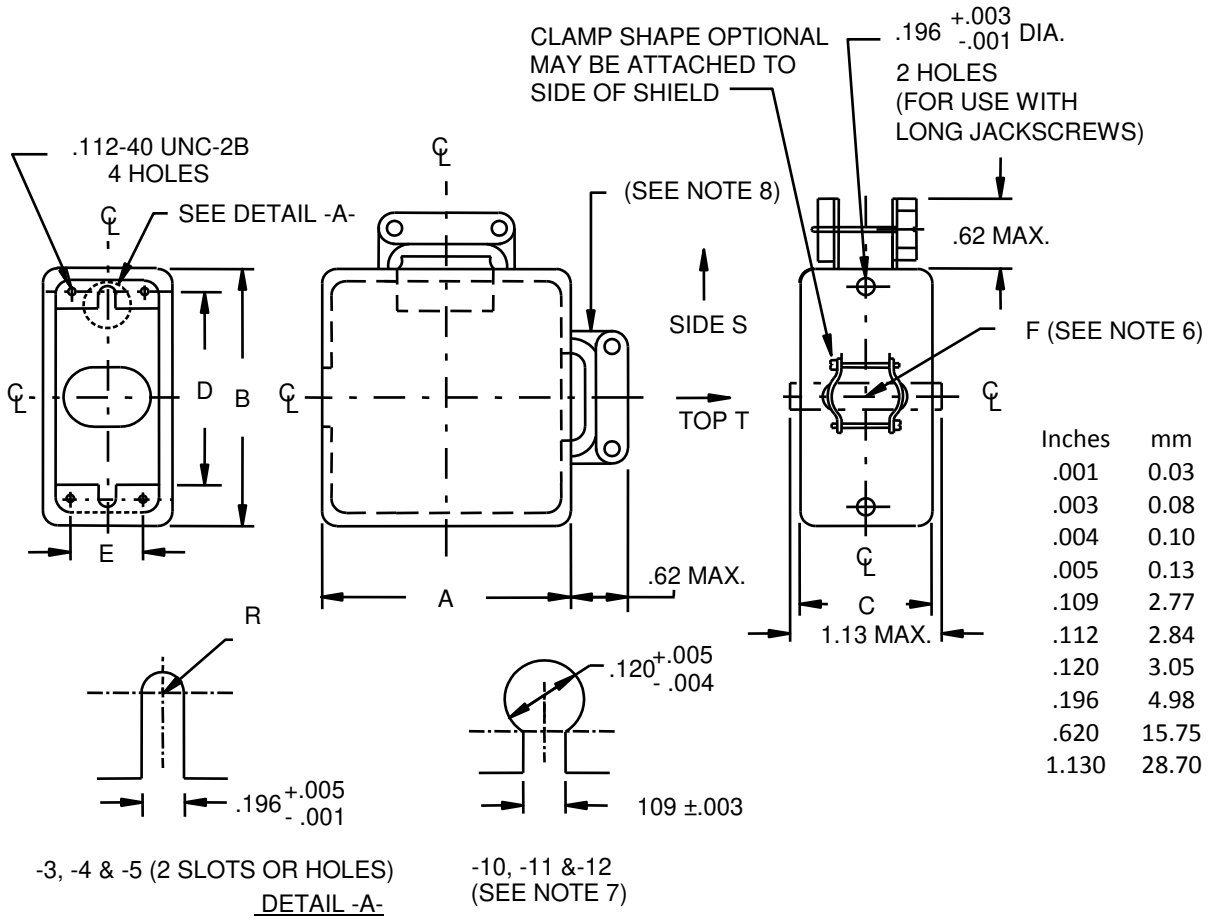

Shield designator	Shield and shield clamp location suffix designator	Connector size (number of contacts)	A min max	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	E ±.010 (0.25)	F Minimum cable opening square inch
MS18192-T3 MS18192-S3	top opening side opening	34	1.22 (30.99) 1.35 (34.29)	2.000 (50.80)	.828 (21.03)	1.688 (42.88)	.468 (11.89)	.34 (8.64)
MS18192-T4 MS18192-S4	top opening side opening	42	1.22 (30.99) 1.35 (34.29)	2.312 (58.72)	.828 (21.03)	2.000 (50.80)	.468 (11.89)	.34 (8.64)
MS18192-T5 MS18192-T5	top opening side opening	50	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	.828 (21.03)	2.282 (57.96)	.468 (11.89)	.34 (8.64)
MS18192-T10 MS18192-S10	top opening side opening	34	1.22 (30.99) 1.35 (34.29)	2.000 (50.80)	.828 (21.03)	1.688 (42.88)	.468 (11.89)	.34 (8.64)
MS18192-T11 MS18192-S11	top opening side opening	42	1.22 (30.99) 1.35 (34.29)	2.312 (58.72)	.828 (21.03)	2.000 (50.80)	.468 (11.89)	.34 (8.64)
MS18192-T12 MS18192-S12	top opening side opening	50	1.22 (30.99) 1.55 (39.37)	2.594 (65.89)	.828 (21.03)	2.282 (57.96)	.468 (11.89)	.34 (8.64)

FIGURE 1. Shields for 7, 9, 14, 18, 20, 26, 34, 42, 50, and 75 contact positions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

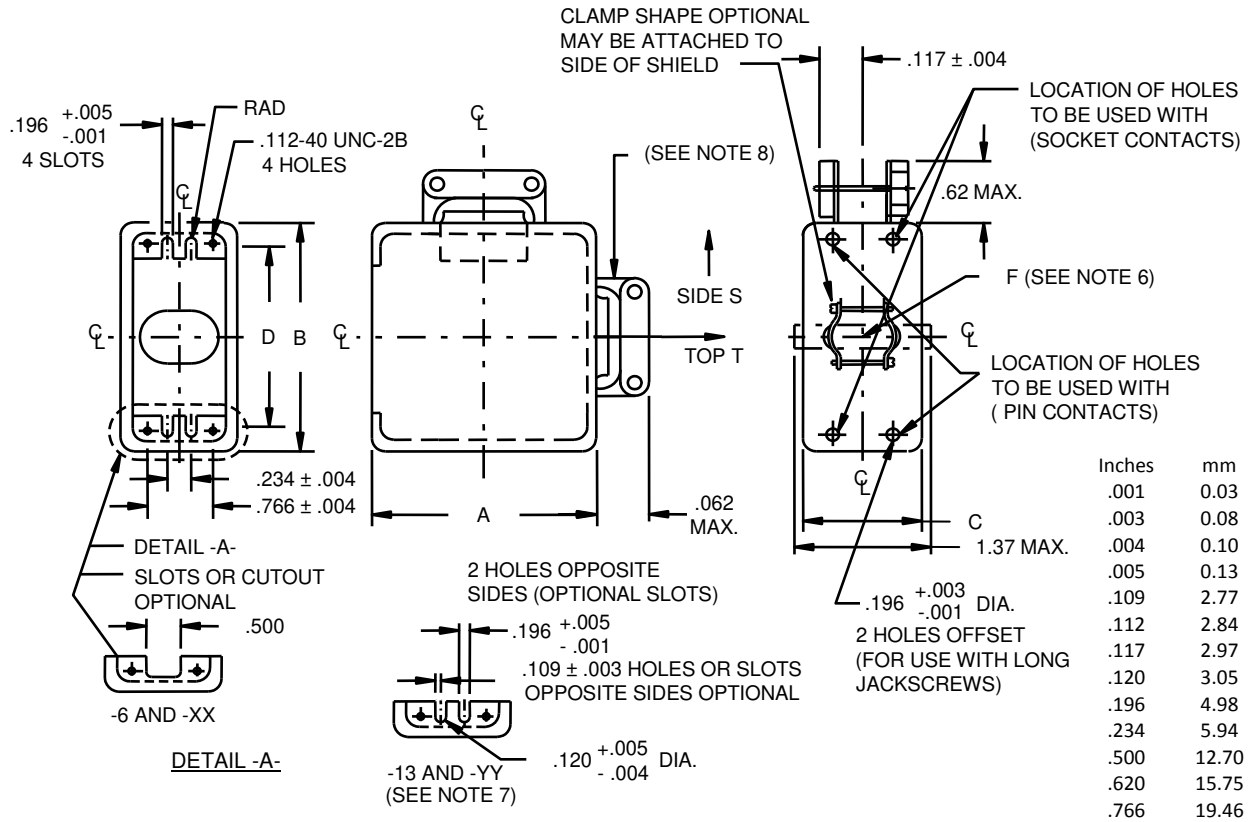

Inches	mm
.001	0.03
.003	0.08
.004	0.10
.005	0.13
.109	2.77
.112	2.84
.117	2.97
.120	3.05
.196	4.98
.234	5.94
.500	12.70
.620	15.75
.766	19.46
1.370	34.80

Designator	Shield and shield clamp location suffix designator	Connector size (number of contacts)	A min max	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	F Minimum cable opening square inch
MS18192-T6 MS18192-S6	top opening side opening	75 Pin only	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	1.188 (30.18)	2.282 (57.96)	.55 (13.97)
MS18192-T13 MS18192-S13	top opening side opening	75 Pin only	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	1.188 (30.18)	2.282 (57.96)	.55 (13.97)
MS18192-TXX MS18192-SXX	top opening side opening	75 Socket only	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	1.188 (30.18)	2.282 (57.96)	.55 (13.97)
MS18192-TYY MS18192-SYY	top opening side opening	75 Socket only	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	1.188 (30.18)	2.282 (57.96)	.55 (13.97)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Material aluminum alloy in accordance with SAE-AMS4016 temper H32 .040 inch (1.02 mm) thick.
5. Finish anodized in accordance with MIL-A-8625, type I or type II.
6. Edges of cable entry hole to be rounded to prevent insulation chafing.
7. MS18192-T10, S10, T11, S12, T13, S13, TYY, and SYY are for use with one-piece jackscrews.
8. Clamp hinge may attach to side of shield.

FIGURE 1. Shields for 7, 9, 14, 18, 20, 26, 34, 42, 50, and 75 contact positions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

Shields contact positions. See figure 1.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28748, this document references the following:

MIL-A-8625
SAE-AMS4016

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army – AM, AR, AT, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 99

(Project 5935-2009-159)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.