DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

USER ACTIVITIES
ARMY-CR,MI

DD FORM 1426 672-1 (REVISED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PA NAVY-AS	INTERNATIONAL INTEREST
Other Govt ARMY-AV AIR FORCE-11	
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 684, NAS 1027 IN PART
TITLE NUT, SELF-LOCKING, PLATE, CORNER, LOW HEIGHT, CRES, 125KSI Ftu, 450°& 800°F	
MILITARY STANDARD MS 21056	PAGE 1 OF 3

5310-1536

Ⓕ ENTIRE STANDARD REVISED

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS AS SPECIFIED HEREIN

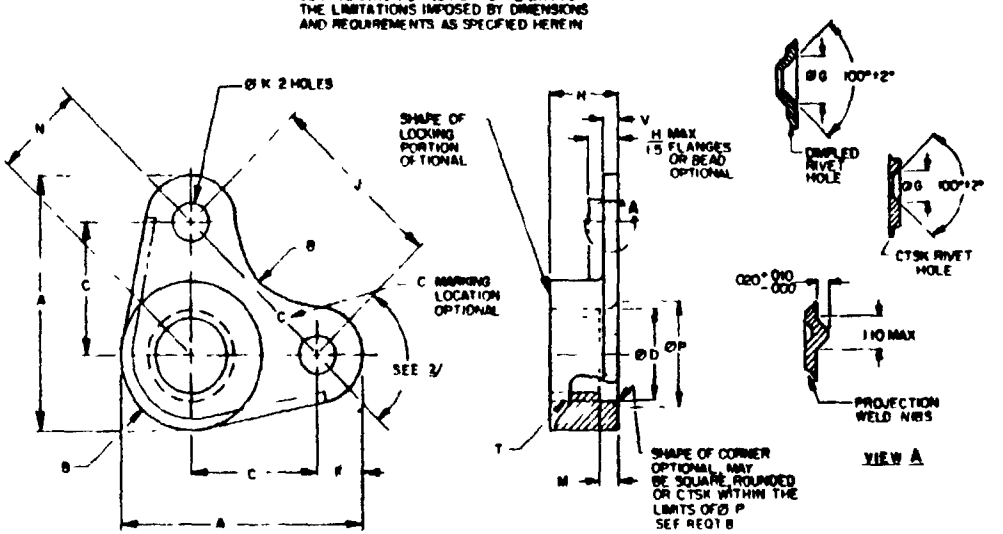


TABLE I. MAIN NUMBERS AND DIMENSIONS

MAIN NUMBER: PLAIN HOLES	MAIN NUMBER: CTSK OR DIMPLED HOLES	MAIN NUMBER: WELDING PROJECTION	DASH NUMBER: PLAIN HOLES	DASH NUMBER: CTSK OR DIMPLED HOLES	DASH NUMBER: WELDING PROJECTION	T THREAD SIZE	A MAX	B MAX	B MIN	C ± .005	Ø D MIN	F MIN	Ø G ± .010	H V MAX	J V ± .002	Ø H V +.005 -.000	N MIN	R MAX	Ø P MAX	V MAX	AXIAL STRENGTH LBS/NUT	WEIGHT LBS/100
L04	L04K	L04W	-04	-04K	-04W	1/2-40 UNJC-3B	.637	.138	.105	.304	—	.100	.200	.163	.088	.090	—	.270	.166	.047	750	20
L06	L06K	L06W	-06	-06K	-06W	9/16-32 UNJC-3B	.637	.133	.108	.304	—	.100	.200	.171	.088	.090	—	.270	.206	.047	1,130	25
L08	L08K	L08W	-08	-08K	-08W	5/8-32 UNJC-3B	.637	.140	.125	.344	.188	.100	.200	.210	.088	.090	—	.270	.240	.047	1,720	30
L1	L1K	L1W	-1	-1K	-1W	1/2-12 UNJF-3B	.653	.184	.145	.344	.194	.100	.200	.250	.088	.090	.063	.270	.274	.047	2 860	39
L4	L4K	L4W	-4	-4K	-4W	7/8-20 UNJF-3B	.847	.207	.185	.500	.256	.100	.200	.281	.107	.090	.062	.303	.344	.055	6,580	58
L5	L5K	L5W	-5	-5K	-5W	3125-24 UNJF-3B	.916	.208	.216	.500	.317	.125	.230	.328	.107	.090	.062	.303	.417	.065	7 990	85
L6	—	L6W	-6	—	-6W	375-24 UNJF-3B	.968	.187	.290	.500	.379	.125	.230	.344	.107	.090	.062	.303	.505	.075	11,050	1 31
L7	—	L7W	-7	—	-7W	4375-20 UNJF-3B	1 .101	.163	.340	.562	.442	.156	.230	.390	.795	.101	.062	.427	.602	.085	15,450	1 84
L8	—	L8W	-8	—	-8W	500-20 UNJF-3B	1 .234	.437	.988	.625	.521	.156	.230	.609	.884	.101	.062	.479	.648	.115	21,110	4 00
L10	—	L10W	-10	—	-10W	.625-18 UNJF-3B	1 .437	.505	.482	.750	.646	.156	.230	.765	1 .061	.101	.062	.574	.756	.115	30 130	8 60

1/ WHEREVER "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005
3/ DIMPLED RIVET HOLE TOLERANCE FOR Ø"H" IS + .015 - .000

APPROVED 21 JUL 64 REVISED Ⓕ 30 SEP 87

FSC CLASS 5310

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. MATERIAL: CORROSION RESISTANT STEEL, TYPE A286, (UNS S66286) IN ACCORDANCE WITH AMS5525, AMS5732 OR AMS5737

2. FINISH. ONLY 800°F NUTS. SILVER PLATE ALL THREADED SURFACES OF NUT ELEMENT IN ACCORDANCE WITH AMS 2410 THREADS SHALL SHOW COMPLETE COVERAGE SILVER PLATING ON ALL OTHER SURFACES OPTIONAL. TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION

3. LUBRICANT: ONLY 450°F NUTS. DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-M-25027

4. DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.

5. HARDNESS. 49HRC, MAX.

6. THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879.

7. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL NOT EXCEED 125 MICRODINCHES, IN ACCORDANCE WITH ANSI B46.1.

8. COUNTERBORE/COUNTERSINK ON SIZE .164 AND LARGER, COUNTERBORE THREAD "D" DIAMETER X .062 DEEP MINIMUM THREAD RELIEF; ON SIZE .138 AND SMALLER, COUNTERSINK TO "P" DIAMETER WITHIN THE LIMITS OF D, P AND M.

9. PERFORMANCE. SEE PROCUREMENT SPECIFICATION, EXCEPT 450°F DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES

10. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21056L4K

- L4K — DASH NUMBER
- MS21056 — BASIC MS NUMBER

MS21056L4K INDICATES: NUT, SELF-LOCKING, PLATE, CORNER, LOW HEIGHT, CRES, 125 KSI Ftu, 450°F DRY FILM LUBRICATION, .250-28 UNJF-3B; COUNTERSUNK OR DIMPLED HOLES.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4. DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

APPROVED 21 JUL 64 REVISED (F) FOR CHANGES SEE PAGES 1,2 AND 3

P.A. NAVY-AS Other Cogs ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, CORNER, LOW HEIGHT, CRES, 125KSI Ftu, 450° & 800°F	MILITARY STANDARD MS21056
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 684, NAS 1027 IN PART		PAGE 2 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1536

USER ACTIVITIES
ARMY-CR, MI

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Distribution for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

USER ACTIVITIES
ARMY - CR, MI

REVIEWER ACTIVITIES
AIR FORCE - 82
DLA - IS

The military standard is approved for use by all Departments and Agencies of the Department of Defense (see section for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 21 JUL 64 REVISED (F) FOR CHANGES SEE PAGES 1, 2 AND 3

INTERCHANGEABILITY RELATIONSHIP

MS21056 NUTS CAN UNIVERSALLY REPLACE NAS684 AND NAS1027 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED OR COUNTERSUNK RIVET HOLES), BUT THESE NAS684 AND NAS1027 NUTS CANNOT UNIVERSALLY REPLACE MS21056 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS684CD6	MS21056-06	NAS684C4A	MS21056-4K	NAS1027C04	MS21056-04	NAS1027C4A	MS21056-4W
NAS684CD6K	MS21056-06K	—	MS21056-4A	NAS1027C04K	MS21056-04K	NAS1027C5	MS21056-5
—	MS21056-06A	NAS684C4M	MS21056L4	NAS1027C04A	MS21056-04W	NAS1027C5K	MS21056-5K
NAS684CD6M	MS21056L06	NAS684C4MK	MS21056L4K	NAS1027C06	MS21056-06	NAS1027C5A	MS21056-5A
NAS684CD6MK	MS21056L06K	—	MS21056L4W	NAS1027C06K	MS21056-06K	NAS1027C6	MS21056-6
—	MS21056L06W	NAS684C5	MS21056-5	NAS1027C06W	MS21056-06W	NAS1027C6W	MS21056-6W
NAS684CD8	MS21056-08	NAS684C5K	MS21056-5K	NAS1027C08	MS21056-08	NAS1027C7	MS21056-7
NAS684CD8K	MS21056-08K	—	MS21056-5MK	NAS1027C08K	MS21056-08K	NAS1027C7W	MS21056-7A
—	MS21056-08A	NAS684C5M	MS21056L5	NAS1027C08W	MS21056-08W	NAS1027C8	MS21056-8
NAS684CD8M	MS21056L08	NAS684C5MK	MS21056L5K	NAS1027C3	MS21056-3	NAS1027C8W	MS21056-8W
NAS684CD8MK	MS21056L08K	—	MS21056L5W	NAS1027C3K	MS21056-3K	NAS1027C10	MS21056-10
—	MS21056L08W	NAS684-6	MS21056-6	NAS1027C3W	MS21056-3W	NAS1027C10W	MS21056-10W
NAS684C3	MS21056-3	—	MS21056-6W	NAS1027C4	MS21056-4		
NAS684C3K	MS21056-3A	NAS684C6M	MS21056L6	NAS1027C4K	MS21056-4K		
—	MS21056-3A	—	MS21056L6W				
NAS684C3M	MS21056L3	NAS684C7	MS21056-7				
NAS684C3MK	MS21056L3K	—	MS21056-7W				
—	MS21056L3W	NAS684C7M	MS21056L7				
NAS684C4	MS21056-4	—	MS21056L7W				

P A NAVY-AS Other Cust ARMY-AV AIR FORCE-II	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, CORNER, LOW HEIGHT, CRES, 125 KSI Ftu, 450° & 800° F	MILITARY STANDARD MS21056
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 684, 1027 IN PART		PAGE 3 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1536

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:25Z
Check the source to verify that this is the current version before use.