THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AV NAVY- AS
AIR FORCE- 11 DLA-
REVIEW
USER CR, MI
PROJECT NUMBER 5310-1950
DISTRIBUTION STATEMENT A. Approved for public release distribution is unlimited

MILITARY SPECIFICATION SHEET

TITLE NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, STEEL, 125 KSI Ftu 450° F

SPECIFICATION SHEET NUMBER MS21061 1 FEB 94 REV C


SUPERSEDING MS21061F 30 SEP 87 (SEE NOTE 5)

AMSC- N/A FSC 5310


Page 1 of 3

(G) DENOTES CHANGES

INCH-POUND

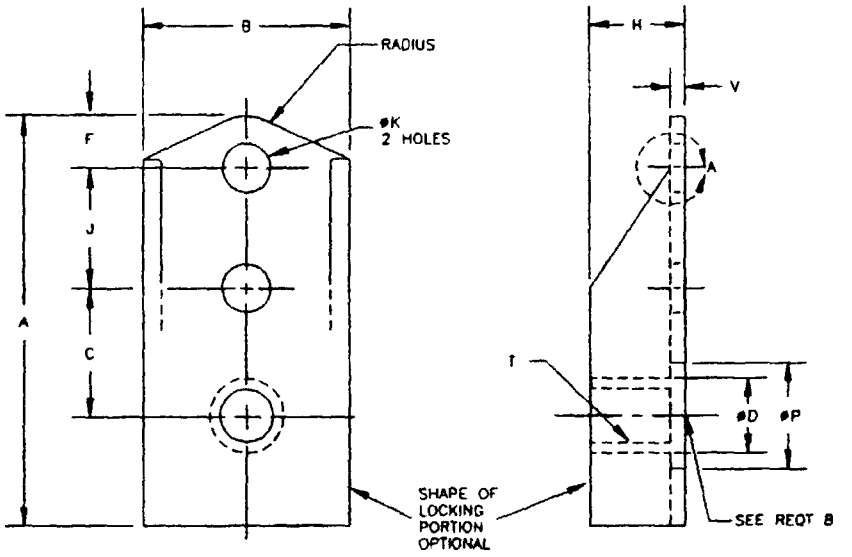

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIM'S, AND REQUIREMENTS AS SPECIFIED HEREIN

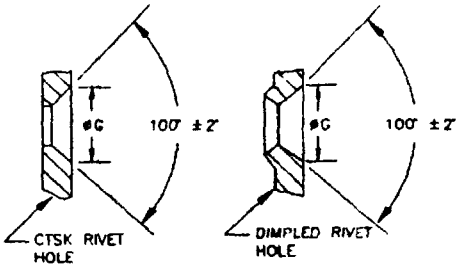

VIEW A

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS				T	A	B		C	ØD	F	ØG	H 1/	J	ØK 2/	ØP		V	AXIAL	WEIGHT
PLAIN RIVET HOLES		COUNTERSUNK OR DIMPLED RIVET HOLES																	
NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT	NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT	THREAD SIZES	MAX	MAX	MIN	± 005	MIN	MIN	± 010	MAX	± 002	+ 005 - 000	MAX	MIN	MAX	STRENGTH LBS/MIN	LBS/100
-04	L04	-04K	L04K	112-40UNJC-3B	1 051	422	290	344	-	100	200	175	312	098	270	172	032	750	52
-06	L06	-06K	L06K	138-32UNJC-3B	1 051	422	290	344	-	100	200	203	312	098	270	198	032	1,130	53
-08	L08	-08K	L08K	164-32UNJC-3B	1 051	422	290	344	168	100	200	250	312	098	270	224	032	1,720	54
-3	L3	-3K	L3K	190-32UNJF-3B	1 051	422	290	344	194	100	200	250	312	098	270	250	032	2,460	56
-4	L4	-4K	L4K	250-28UNJF-3B	1 306	531	350	500	254	100	.200	281	312	098	330	310	032	4,580	93
-5	L5	-5K	L5K	3125-24UNJF-3B	1 398	641	412	500	317	125	230	328	312	130	392	372	045	7,390	1 44
-6	L6	-	-	375-24UNJF-3B	1 422	703	656	500	380	125	230	479	312	130	487	438	075	11,450	2 00
-8	L8	-	-	500-20UNJF 3B	1 800	859	796	625	504	125	230	595	500	181	550	500	075	15,450	2 50

1/ MINIMUM "H" NOT SPECIFIED LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ DIMPLED RIVET HOLE TOLERANCE FOR "ØK" IS + 015 - 000

Form Approved OMB No 0704-0188

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:26Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

REQUIREMENTS

(G) 1 MATERIAL. CARBON STEEL COMPOSITIONS 1035 (UNS G10350) 1040 (UNS G10400) AND 1050 (UNS G10500) IN ACCORDANCE WITH ASTM A827 OR QQ-S-700 1042 (UNS G10420) IN ACCORDANCE WITH ASTM A29 ALLOY STEEL GRADES 4130 (UNS G41300) 4340 (UNS G43400) AND 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29

2 FINISH. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II CLASS 2 FOR DRY FILM LUBRICATED NUTS THE TYPE AND CLASS ARE OPTIONAL IF THE NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II

3 DIMENSIONING AND TOLERANCING. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

4 HARDNESS. 49HRC, MAX

5 THREADS. THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879

6 SURFACE TEXTURE. SURFACE TEXTURE UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES IN ACCORDANCE WITH ANSI/ASME B46 1


7 LUBRICANT. DRY FILM LUBRICANT APPROVED IN ACCORDANCE WITH MIL-N-25027 NON-DRY FILM LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN MIL-S-8802

8 COUNTERBORE/COUNTERSINK. ON SIZE 164 AND LARGER THREAD RELIEF SHALL BE 062 MINIMUM, ON SIZE 138 AND SMALLER, COUNTERSINK OR RADIUSED WITHIN "P" DIAMETER

9 FLOAT OF NUT PORTION. FLOAT OF NUT PORTION OF ASSEMBLY SHALL NOT BE LESS THAN 030 RADIALLY FROM CENTERED POSITION NUT ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH BOLT IN THE MAXIMUM MISALIGNED POSITION

10 PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE. MS21061L4K



MS21061L4K INDICATES NUT, SELF-LOCKING PLATE ONE LUG FLOATING LOW HEIGHT, STEEL, 125 KSI Ftu, 450° F, 250-28 UNJF-3B DRY FILM LUBRICANT, COUNTERSUNK OR DIMPLED HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON A 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

5 MS21061 SUPERSEDES NAS 687, NAS 1032 (IN PART)

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 11 DLA- REVIEW USER CR MI PROJECT NUMBER 5310-1950	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT STEEL, 125 KSI Ftu, 450° F	SPECIFICATION SHEET NUMBER MS21061 1 FEB 94 REV G SUPERSEDING MS21061F 30 SEP 87 (SEE NOTE 5) AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited		Page 2 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:26Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

Form Approved
OMB No 0704-0188

INTERCHANGEABILITY RELATIONSHIP

MS21061 NUTS CAN UNIVERSALLY REPLACE NAS687 AND NAS1032 NUTS OF ALL LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED OR COUNTERSUNK RIVET HOLES), BUT THESE NAS687 AND NAS1032 NUTS CAN NOT UNIVERSALLY REPLACE MS21061 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS		SUBSTITUTIVE PART NUMBERS
NAS687X04	---	MS21061-04
NAS687X04K	---	MS21061-04K
NAS687A04	NAS1032A04	MS21061L04
NAS687A04K	---	MS21061L04K
NAS687X06	---	MS21061-06
NAS687X06K	---	MS21061-06K
NAS687A06	NAS1032A06	MS21061L06
NAS687A06K	---	MS21061L06K
NAS687X08	---	MS21061-08
NAS687X08K	---	MS21061-08K
NAS687A08	NAS1032A08	MS21061L08
NAS687A08K	---	MS21061L08K
NAS687X3	---	MS21061-3
NAS687X3K	---	MS21061-3K
NAS687A3	NAS1032A3	MS21061L3
NAS687A3K	---	MS21061L3K
NAS687X4	---	MS21061-4
NAS687X4K	---	MS21061-4K
NAS687A4	NAS1032A4	MS21061L4
NAS687A4K	---	MS21061L4K
NAS687X5	---	MS21061-5
NAS687X5K	---	MS21061-5K
NAS687A5	NAS1032A5	MS21061L5
NAS687A5K	---	MS21061L5K
---	---	MS21061-6
---	NAS1032A6	MS21061L6
---	---	MS21061-8
---	NAS1032A8	MS21061L8

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AV NAVY- AS
AIR FORCE- 11 DLA-
REVIEW
USER CR, MI
PROJECT NUMBER 5310-1950

MILITARY SPECIFICATION SHEET

TITLE

NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, STEEL 125 KSI Flu 450° F

SPECIFICATION SHEET NUMBER
MS21061 1 FEB 94 REV C

SUPERSEDING
MS21061F 30 SEP 87 (SEE NOTE 5)

AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.