
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION
AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS
DESIGNATION MIL-S-8834

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies
of the Dep nt of Defense

Form Approved
OMB No 0704 0188

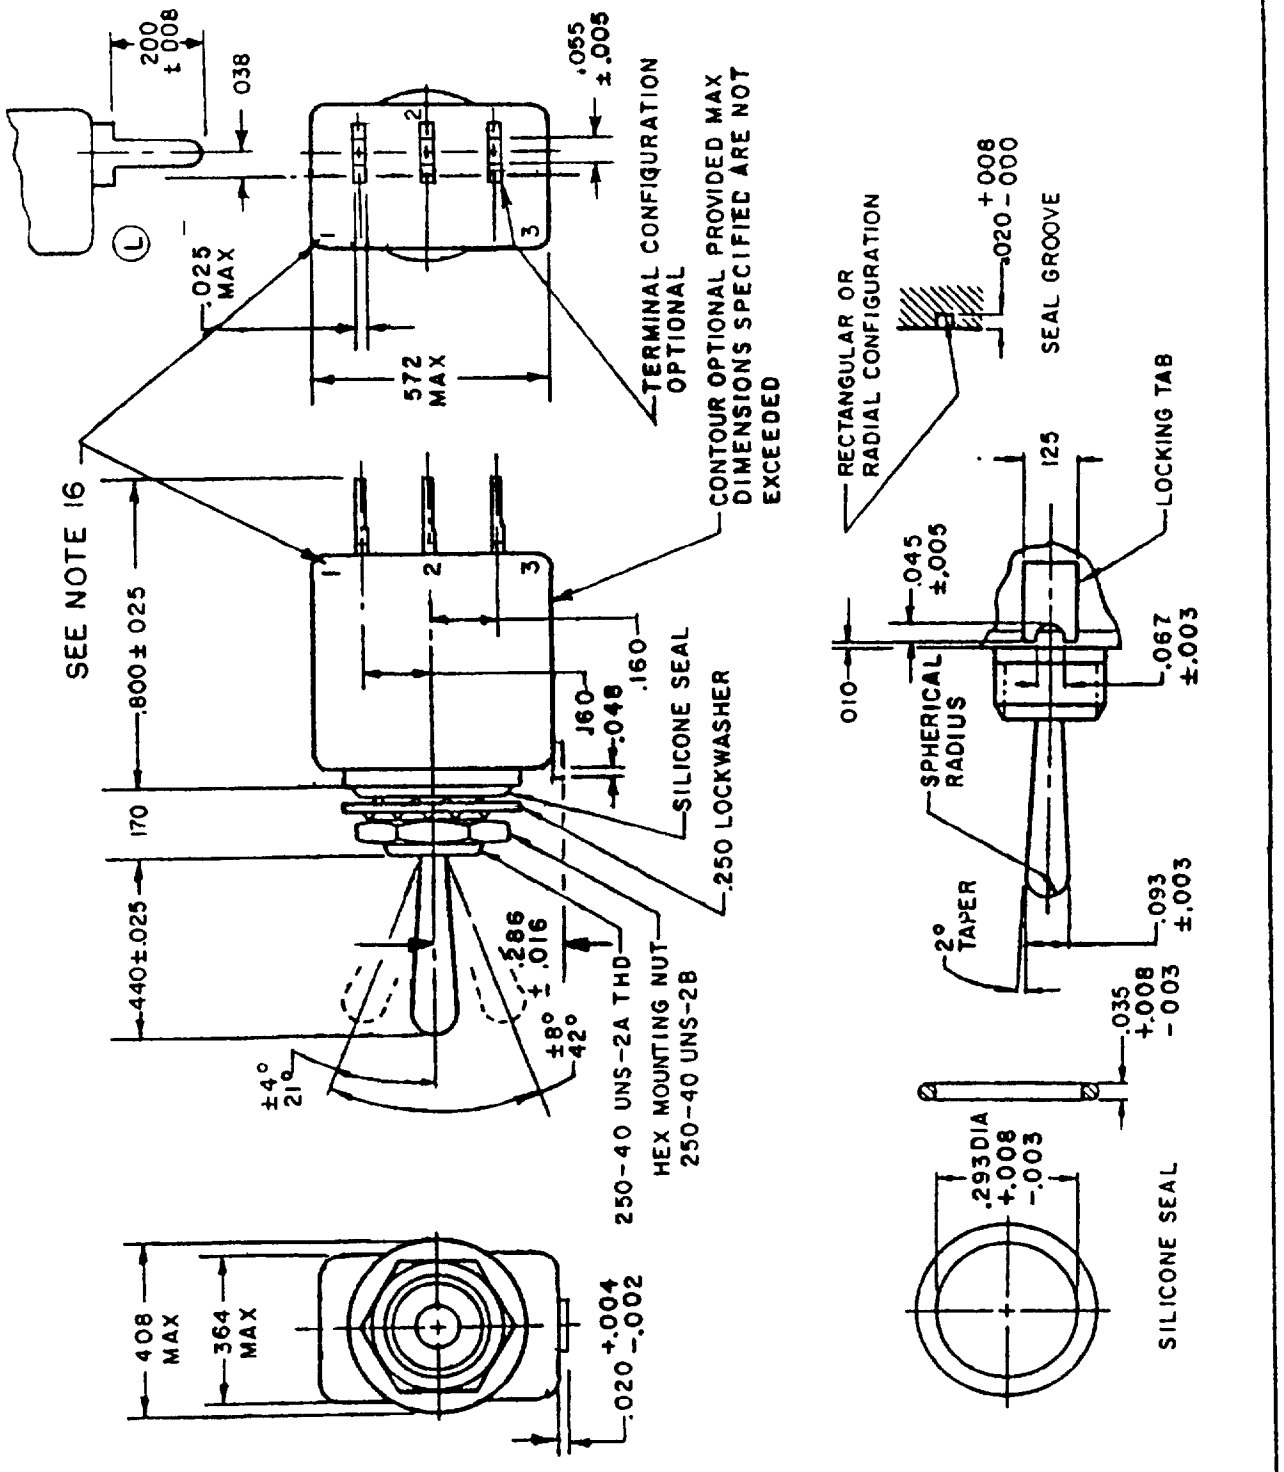

Ⓛ Denotes changes

PREPARING ACTIVITY: Air Force-85 CUSTODIANS: ARMY ER, NAVY AS, AIR FORCE, DLA REVIEW USER: Air Force-99 Navy-EC Army-AR PROJECT NUMBER: 5930-1454-01	**MILITARY SPECIFICATION SHEET** TITLE: SWITCH, TOGGLE, POSITIVE BREAK, MINIATURE, TOGGLE SEALED, PRINTED CIRCUIT BOARD TERMINALS, SINGLE POLE, 250 MOUNTING BUSHING	SPECIFICATION SHEET NUMBER: MS21354L, 4 Sep 1991 SUPERSEDING: MS21354K, 15 Dec 1989 AMSC N/A, FSC 5930
DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited		Page 1 of 3


DD Form 672, MAY 88 *Previous editions are obsolete*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704 0188

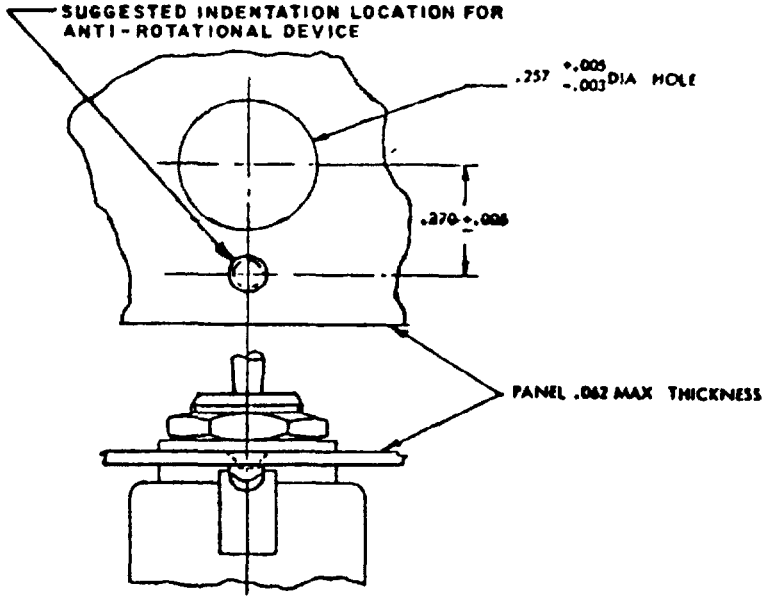

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0 05	.025	0 64	.093	2.36	.286	7.26
.003	0.08	.035	0.89	.125	3.18	.293	7 44
.004	0 10	038	0.97	.160	4.06	.364	9.25
.005	0.13	045	1.14	.170	4.32	.408	10 36
.008	0.20	.048	1.22	.200	5.08	.440	11.18
.010	0 25	055	1.40	.250	6.35	572	14 53
.016	0 41	.062	1.57	.257	6.53	.800	20.32
.020	0.51	.067	1.70	.270	6.86		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±5° on angles.
4. For hardware detail specification see appendix of MIL-S-8834.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation shall form a part of this standard to the extent specified herein.
7. Dielectric withstanding voltage. For center on circuit's, DWV shall be 1200 V rms at sea level.
8. 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.
9. Switches shall be rigidly mounted by their normal means on a rigid metal panel and subjected to shock test, method 207, of MIL-STD-202. The switch shall be electrically and mechanically operative at the conclusion of the test and there shall be no mechanical transfer during the text.
10. Terminals: Gold plated.
11. Suitable for mounting on panels 062 inches (1.57 mm) maximum thickness
12. Weight: .011 pound maximum (5 grams).
13. Strength of terminals. 5 pounds normal to the mounting plane and 1 pound in other planes.
14. Altitude: 50,000 feet.
15. Strength of actuator: Lever pivot and lever stop 6 pounds,
16. Terminals need not be marked. Terminal identification is shown for reference purposes only.

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY FR NAVY AS AIR FORCE DLA REVIEW Air Force-99 Navy-EC Army-AR USER PROJECT NUMBER 5930-1454-01	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, POSITIVE BREAK, MINIATURE, TOGGLE SEALED, PRINTED CIRCUIT BOARD TERMINALS, SINGLE POLE, 250 MOUNTING BUSHING	SPECIFICATION SHEET NUMBER MS21354L SUPERSEDING MS21354K 15 Dec 1980 AMSC N/A FSC 5930
DISTRIBUTION STATEMENT		Page 2 of 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION ET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS TIFIED IN SOLICITATION

Detail requirements

MS dash no.	Circuit made between terminals as indicated with the toggle lever in these positions: (a)			Current capacity in amperes						Low current level switching 5 mV
				Resistive load			Inductive load			
	Opposite locking tab side (d)	Center position	Locking tab side (d)	28 V dc	115 V 60 Hz ac	115 V 400 Hz ac	28 V dc	115 V 60 Hz ac	115 V 400 Hz ac	
-211	on 2-3	off	on 1-2	5	2	3	(b) 1	1	2	(c) 25 µA
-221		none	off							
-231			on 1-2							
-241		off	none							
-271	mom-on 2-3		mom-on 1-2							
-281	none									
-311	on 2-3									
-321 (e)	none	on 2-3								

SEE NOTE (e)

(L) (a) Direction of movement of internal mechanism is opposite to the direction of the toggle movement.
(b) With time constant of .020 ±.002 seconds.
(c) Contact resistance not to exceed 50Ω during life, low current level switching
(d) Non-functional terminals shall not be supplied.
(e) Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY ER; NAVY AS; AIR FORCE; DLA
REVIEW: Air Force-99 Navy-EC
USER: Army-AR
PROJECT NUMBER 5930-1454-01
DISTRIBUTION STATEMENT

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, POSITIVE BREAK, MINIATURE, TOGGLE SEALED, PRINTED CIRCUIT BOARD TERMINALS, SINGLE POLE, 250 MOUNTING BUSHING

SPECIFICATION SHEET NUMBER: MS21354L
SUPERSEDING: MS21354K
AMSC N/A
15 Dec 1989
FSC 5930

DD Form 672 MAY 88
Page 3 of 3

Form Approved OMB No 0704-0188

Source: https://assist.dla.mil downloaded: 2026-02-10-23T14:36Z
Check the source to verify that this is the current version before use.