FED SUP CLASS
5925

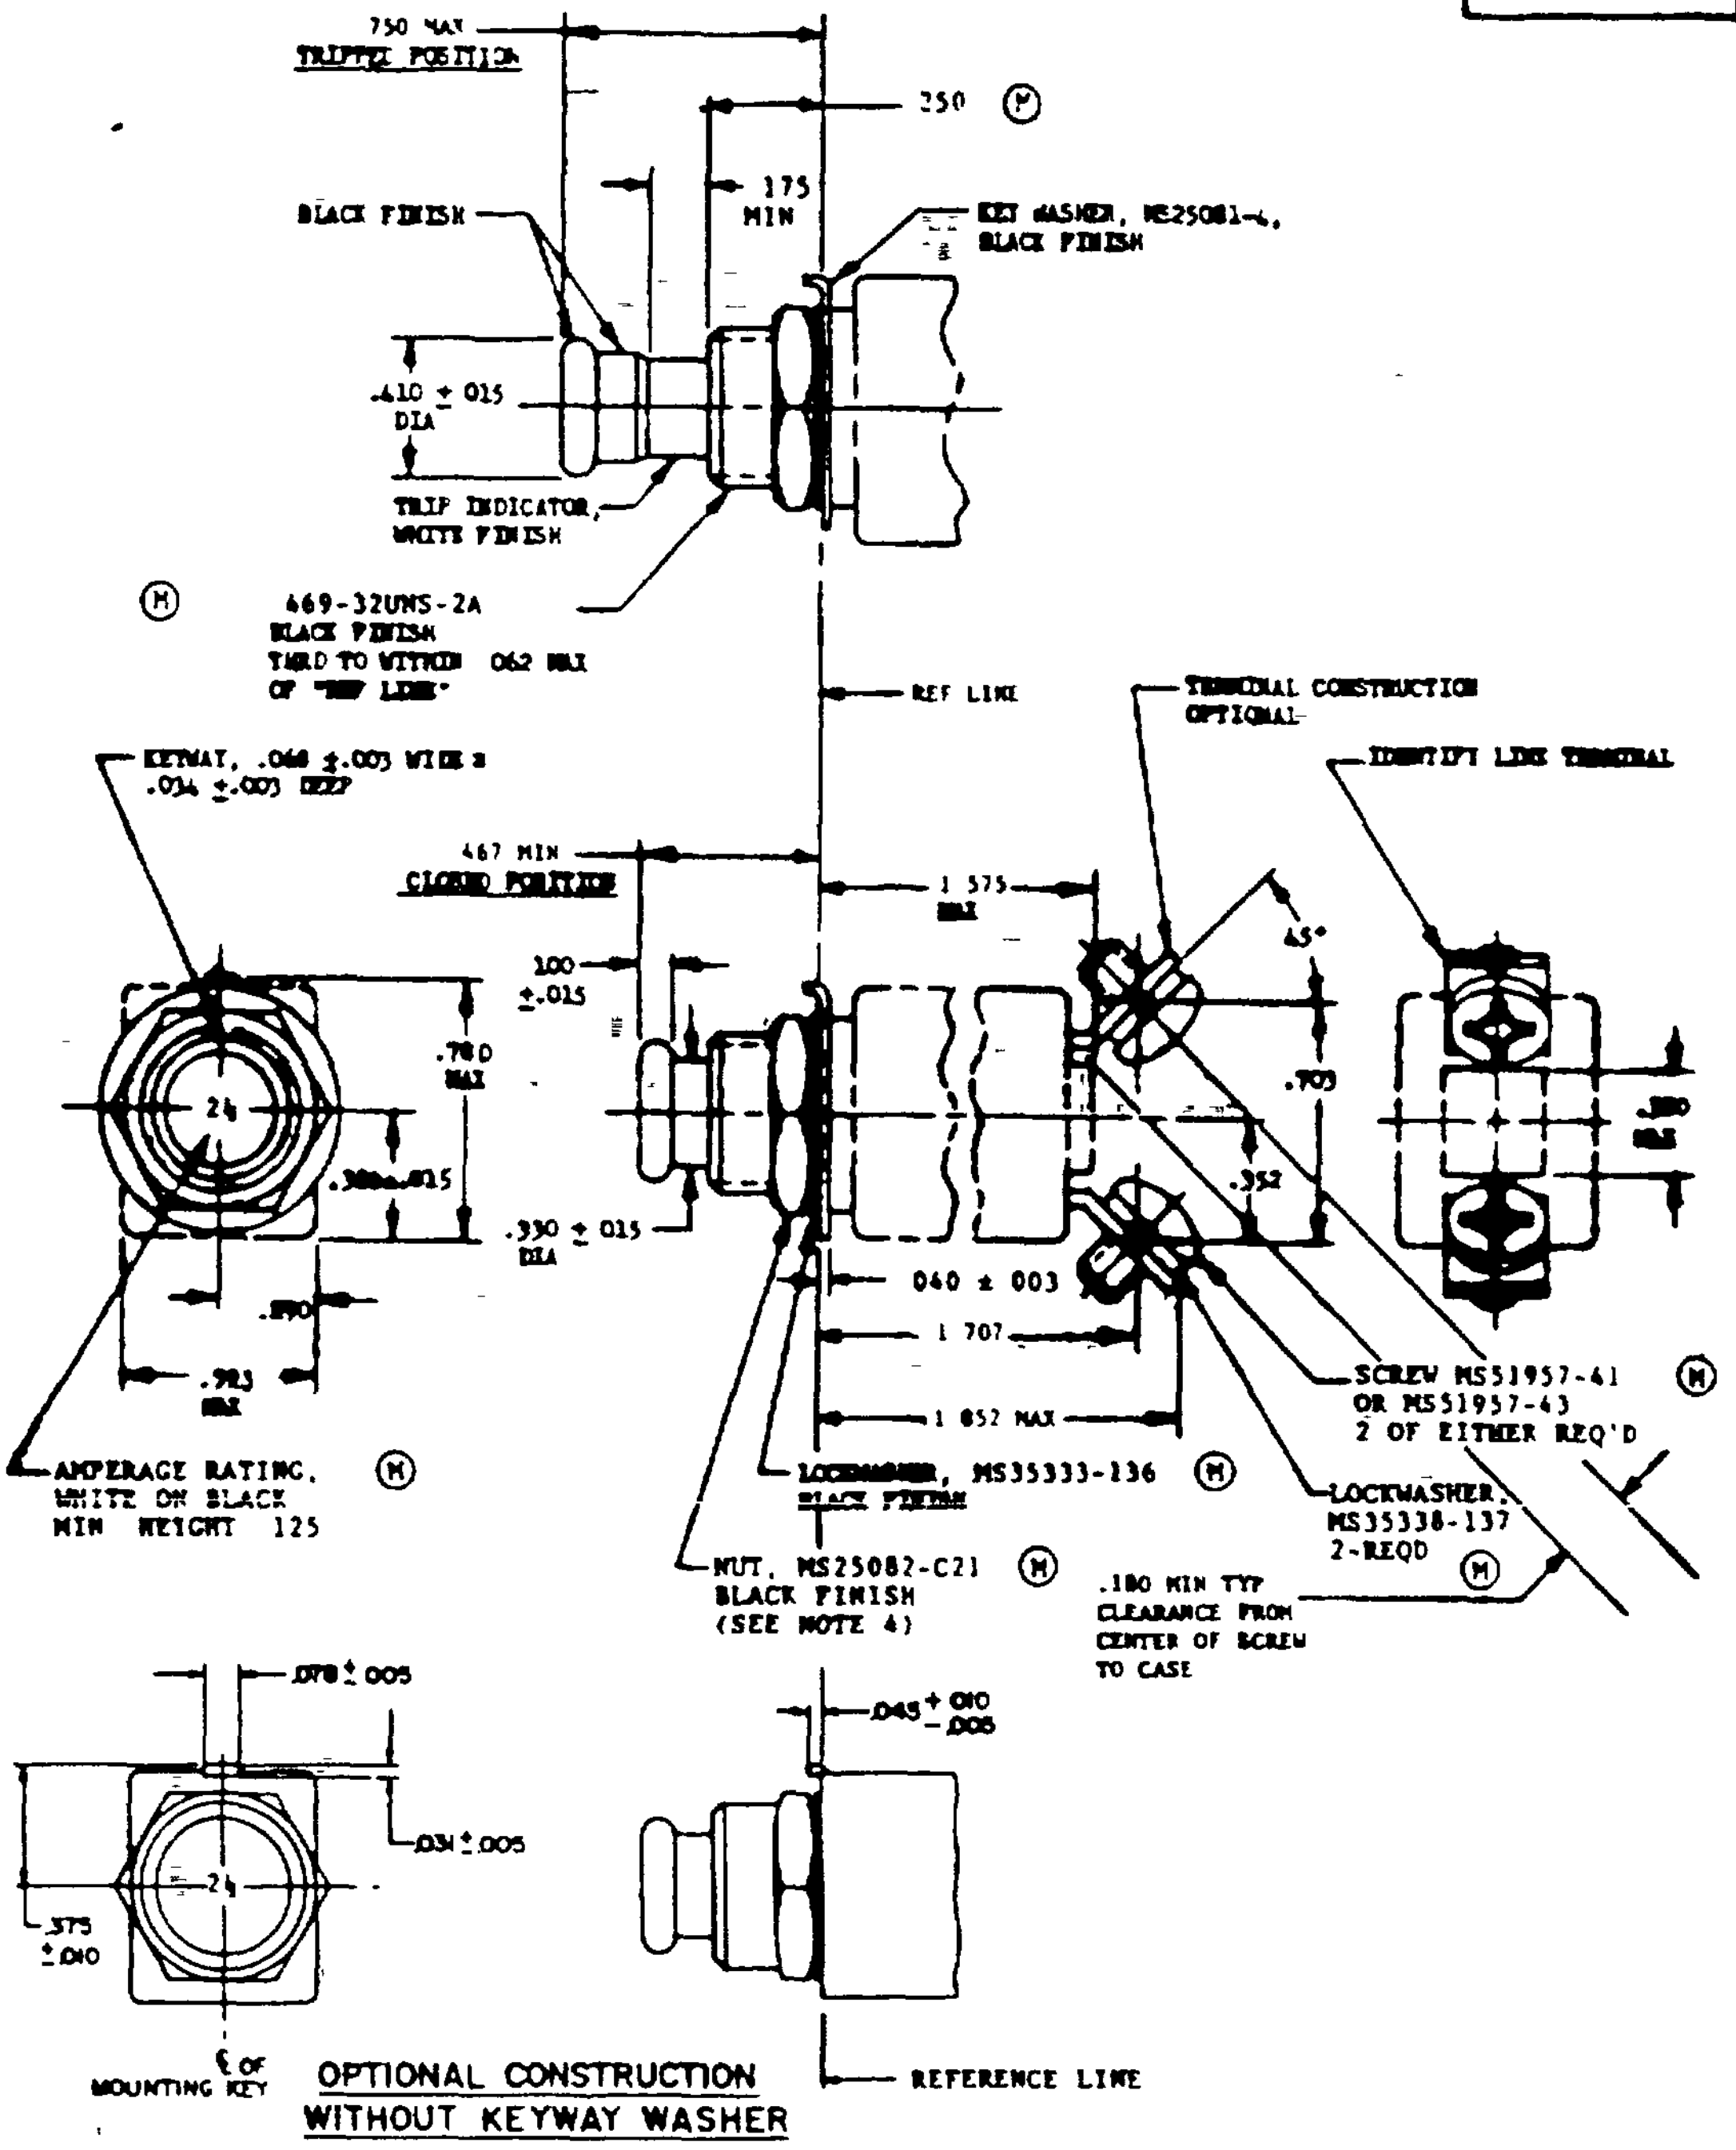

OPTIONAL CONSTRUCTION
WITHOUT KEYWAY WASHER

(✓) DENOTES CHANGES

APPROVED 13 JAN 64 REVISED (G) 31 MAY 66 (H) [illegible] 73 (J) 1 SEPT 77 (K) 1 SEPT 78 (L) 7 DEC 83 (M) 30 NOV 1987

P.A. NAVY-AS Other Cust USAF-85 ARMY-EF	INTERNATIONAL INTEREST **	TITLE CIRCUIT BREAKER, TRIP-FREE, PUSH-PULL 1/2 THRU 20 AMP, TYPE 1
PROCUREMENT SPECIFICATION MIL-C-5809	SUPERSEDES MS002073F(USAF) & MS22073E	

MILITARY STANDARD

MS22073

SHEET 1 OF 4

DD FORM 1 MAR 77 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE 4

PROJECT NO. 5925-0176

ENGINEERING SPECIFICATIONS

AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Custodian/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
USAF-[illegible]
DESC-[illegible]

USER SYMBOLS:

FED SUP CLASS
5925

TABLE I Ⓜ

ELECTRICAL AND MECHANICAL CHARACTERISTICS

DASH NUMBER	NOMINAL CAPACITY (AMPERES)	VOLTAGE DROP MAX	WEIGHT MAX (LBS)	OPERATING FORCE MAX (LBS)		ENDURANCE CYCLES				MECH NO LOAD
						RESISTIVE		INDUCTIVE		
				PULLOUT	RESET	AC	DC	AC	DC	
1/2	0 5 (1/2	2 00	084	5	5	1/ 5,000	2/ 5,000	1/ 2,500 0 6 to 0 7 LAGGING POWER FACTOR	2/ 2,500	5,500
3/4	0 75 (3/4)	1 45								
1	1	1 10								
1-1/2	1 5 (1-1/2)	0 75								
2	2	0 75								
2-1/2	2 5 (2-1/2)	0 70								
3	3	0 55								
4	4	0 45								
5	5	0 35								
7-1/2	7 5 (7-1/2)	0 30								
10	10	0 28								
15	15	0 25V								
20	20	0 25V								

1/ 400 HZ 115/210 VOLT SYSTEM, TESTED AT 120 ±5 VOLTS 380-420 HZ
2/ 28 VOLTS DC SYSTEM, TESTED AT 20 ±2 VOLTS

TABLE II Ⓜ

DETAIL CALIBRATION REQUIREMENTS - TRIP TIME IN SECONDS

NOMINAL CAPACITY (AMPERES)	+25°C					-55°C		+71°C	
	PERCENT RATED CURRENT					PERCENT RATED CURRENT		PERCENT RATED CURRENT	
	115	150	200	500	1000	135	180	90	130
0 5 (1/2)	MUST HOLD-1 HOUR MIN	MUST TRIP-1 HOUR MAX	2 TO 20	0 16 TO 2 0	046 TO 0 8	MUST HOLD-1 HOUR MIN	MUST TRIP-1 HOUR MAX	MUST HOLD-1 HOUR MIN	MUST TRIP-1 HOUR MAX
0 75 (3/4)									
1									
1 5 (1-1/2)									
2									
2 5 (2-1/2)									
3									
4									
5									
7 5 (7-1/2)									
10									
15									
20									

AMBIENT TEMPERATURE TOLERANCE ±2°C

APPROVED 13 JAN 64 REVISED Ⓜ FOR CHANGES SEE SHEET 1

P A NAVY - AS Other Cust USAF - 85 ARMY - EL	INTERNATIONAL INTEREST	TITLE CIRCUIT BREAKER TRIP-FREE PUSH-PULL 1 2 THRU 20 AMP TYPE I	MILITARY STANDARD MS22073
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES MS0022073F (USAF) & MS22073E	SHEET 2 OF 4

DD FORM 1 MAY 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. [illegible]

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

"Custodian/user information is current as of the date of this document. For future coordination of changes to this document, draft proposals should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
NAVY - [illegible]
DESC - [illegible]

USER SYMBOLS:

ENGINEERING SPECIFICATIONS
AND STANDARDS DEPARTMENT DATE ___

FED SUP CLASS
5925

TABLE III

INTERRUPTING CURRENT (AMPERES) REQUIREMENTS						
NOMINAL CAPACITY (AMPERES)	TEST DESIGNATION PER MIL-C-5809					
	A	B	C	D	E	F
0.5 (1/2)	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	(a) 2,000 (b) 1,000 (c) 750	(a) 3,000 (b) 1,500 (c) 1,000
0.75 (3/4)						
1						
1.5 (1-1/2)						
2	800	800			(a) 500 (b) 300 (c) 50	
2.5 (2-1/2)						
3						
4						
5						
7.5 (7-1/2)	500	500	2,000	2,000	(a) 300 (b) 50	(a) 1,500 (b) 1,000 (c) 500
10						
15						
20						

TABLE IV

ENVIRONMENTAL PERFORMANCE	
MAXIMUM OPERATING ALTITUDE - FT	80 000
OPERATING AMBIENT TEMPERATURE RANGE	-55°C TO +71°C
VIBRATION - IN ACCORDANCE WITH MIL-C-5809	SINE - REQUIRED HIGH LEVEL SINE - (OPTIONAL) RANDOM - (OPTIONAL)
SHOCK	30G MIL-STD-202, METHOD 213, TEST CONDITION J
ACCELERATION	10G

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF-11
DESC-ES

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new [illegible] and [illegible] applications and for [illegible] shall be made from this document.

APPROVED 13 JAN 63 REVISED (M) FOR CHANGES SEE SHEET 1

P A NAVY-AS Other Cust USAF-85 ARMY-ER	INTERNATIONAL INTEREST * *	TITLE CIRCUIT BREAKER, TRIP FREE, PUSH [illegible]	MILITARY STANDARD MS22073
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES MS0022073F(USAF) & MS22073E	SHEET 3 OF 4

DD FORM 1 MAR 77 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED SUP CLASS
5925

REQUIREMENTS

1 MOUNTING NUT TORQUE 40 IN LB MAX

2 THE PART NUMBERS FOR CIRCUIT BREAKERS IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW

MS22073 - D5V
HIGH VIBRATION CAPABILITY (OPTION)
AMPERAGE RATING
RANDOM VIBRATION LEVEL (OPTION)
BASIC PART NUMBER

Ⓜ

WHEN A DESIGNATOR IS NOT APPLICABLE IT SHALL BE OMITTED FROM THE PART NUMBER

3 CIRCUIT BREAKERS ARE DESIGNED TO BE TRIP FREE AS DEFINED IN MIL-C-5809

4 VOLTAGE RATING 28 VDC NOMINAL OR 115V 400 HZ NOMINAL

NOTES

1 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCE DECIMALS ± .031; ANGLES ± 2°

2 PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repair use shall be made from this document

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
USAF - 11
DESC - ES

USER SYMBOLS:

APPROVED 13 JAN 64 REVISED Ⓜ FOR CHANGES SEE SHEET 1

P.A. NAVY - AS Other Cust USAF - 85 ARMY - ER	INTERNATIONAL INTEREST * *	TITLE CIRCUIT BREAKER, TRIP-FREE, PUSH-PULL 1 THRU 20 AMP, TYPE I	MILITARY STANDARD MS22073
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES MS0022073F(USAF) & MS22073E	SHEET 4 OF 4

DD FORM 1 MAR 77 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE MODIFIED PLATE NO 23091

ENGINEERING SPECIFICATIONS AND STANDARDS DEPARTMENT DATE