

FED. SUP CLASS
5340

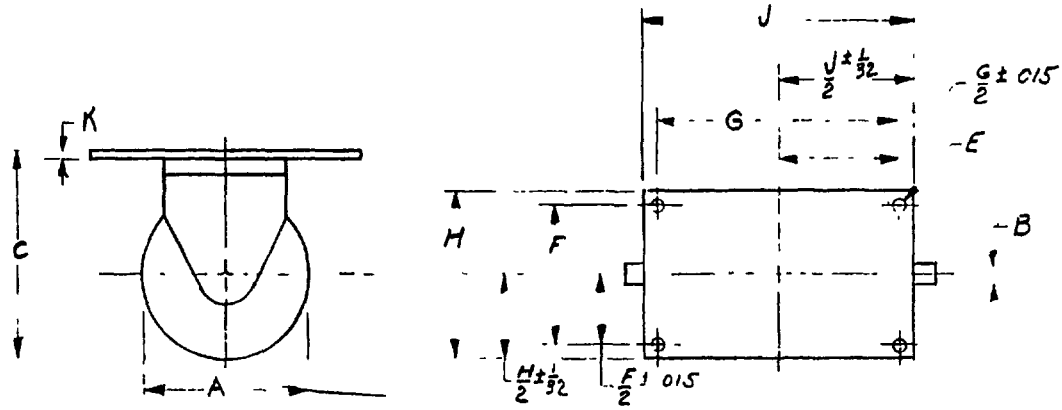

RIGID CASTER NONSWIVEL

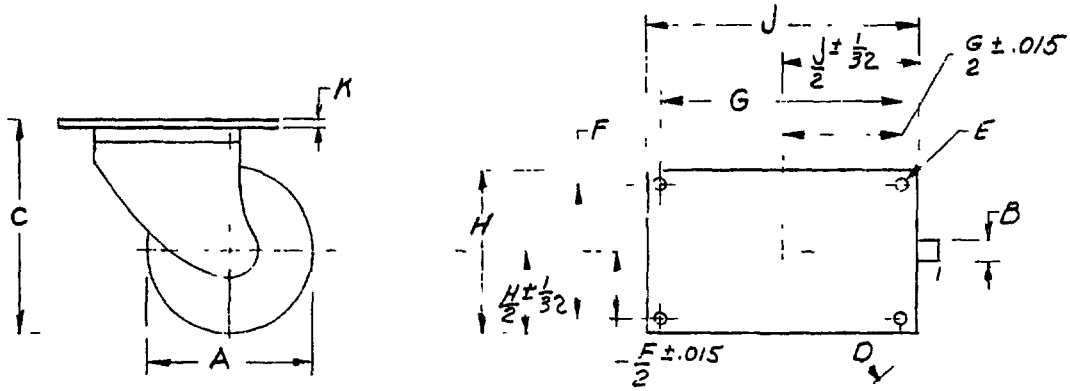

SWIVEL CASTER OFFSET

DIMENSIONS IN INCHES

FOLLOWING NOTES APPLY TO MS PART NO. TABLE (SEE SHEET 2)

(a) DASH NUMBERS -8, -10, -12, & -16 DESIGNATE THE WHEEL SIZE AS DESIGNATED BY COLUMN "A".
THE FIRST DASH LETTERS DESIGNATE THE TYPE OF WHEEL AS FOLLOWS:
S - SINGLE
D - DUAL
THE SECOND DASH LETTERS DESIGNATE THE STYLE OF CASTER AS FOLLOWS:
R - RIGID
W - SWIVEL
THE THIRD DASH LETTERS DESIGNATE THE TYPE TIRE AS FOLLOWS:
C - CURED OR VULCANIZED ON TIRE
V - VULCANIZED DEMOUNTABLE TIRE
THE FOURTH DASH LETTERS DESIGNATE THE DEFLECTION AS FOLLOWS:
L - LOW TOTAL DEFLECTION (1/2 TO 1 INCH MAX.)
H - HIGH TOTAL DEFLECTION (1 TO 2 INCHES MAX.)

(B) ADDITIONAL DASH LETTERS SHALL BE ADDED TO CASTERS, WHEN REQUIRED, TO DESIGNATE THE FOLLOWING:
(B) P - STEERING PROVISIONS
B - BRAKES INSTALLED

(b) THE "B" TREAD WIDTH IS THE WIDTH OF EACH WHEEL ON THE CASTER, WHETHER THE CASTER IS OF SINGLE OR DUAL WHEEL CONSTRUCTION

(c) APPLIES TO SWIVEL CASTER ONLY

EXAMPLE OF PART NO: MS24374-8SRVL: SIZE 8, SINGLE WHEEL, DEMOUNTABLE TIRE, LOW TOTAL DEFLECTION.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(S) FOR CHANGES SEE SHEETS 1, 2, AND 3 SHEET 4 DELETED.

APPROVED 30 JUN 58 REVISED (A) 3 MAY 1963 (B) 3 SEP 65

Users
WC MO, CE

Reviewers:
Army - GL
Navy - YD
Air Force - 11, 69
DSA-IS

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering design applications and for repetitive use shall be made from this document

P A Air Force - 11 Other Cust Air Force-11 Army - GL Navy - YD	TITLE CASTERS, RIGID AND SWIVEL - PRECISION SPRING MOUNTED	MILITARY STANDARD MS 24374
PROCUREMENT SPECIFICATION MIL-C-4751	SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:53Z
Check the source to verify that this is the current version before use.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering design applications and for repetitive use shall be made from this document

Reviewers.
Army - GL
Navy - YD
Air Force - 11, 69
DSA-ES

Users'
WC, MO, CE

FED SUP CLASS
5340

(a) MS PART NO.	A WHEEL DIA. NOM	(B) STYLE	(B) TYPE WHEEL	TYPE TIRE	TOTAL DEFLECTION	(B) RATED LOAD LB (MIN)	CASTER WEIGHT MAX. LB.	B (b) THREAD WIDTH AT BASE OF TIRE ±1/16	C OVERALL HEIGHT AT RATED LOAD ±1/4	D (c) SWIVEL CLEARANCE MAX.	D (c) SWIVEL CLEARANCE MIN.	E DIA. OF BOLT HOLES ±.004	F BOLT HOLE SPACING ±.010	G BOLT HOLE SPACING ±.010	H MAX. TOP PLATE WIDTH	J MAX. TOP PLATE LENGTH	K MAX. PLATE THICKNESS AT BOLT HOLES
MS24374-5SRCL	5	RIGID	SINGLE	CURED ON	LOW	560	35	2-1/2	11-1/4	9-1/2	6-1/2	.656	4.875	6.750	7	8-1/2	3/4
MS24374-5SRCH					HIGH												
MS24374-5SRVL				DEMOUNTABLE	LOW												
MS24374-5SRVH					HIGH												
MS24374-5SWCL			SWIVEL	CURED ON	LOW												
MS24374-5SWCH					HIGH												
MS24374-5SWVL				DEMOUNTABLE	LOW												
MS24374-5SWVH					HIGH												
MS24374-5DRCL		RIGID	DUAL	CURED ON	LOW	755	50										
MS24374-5DRCH					HIGH												
MS24374-5DRVL				DEMOUNTABLE	LOW												
MS24374-5DRVH					HIGH												
MS24374-5DWCL			SWIVEL	CURED ON	LOW												
MS24374-5DWCH					HIGH												
MS24374-5DWVL				DEMOUNTABLE	LOW												
MS24374-5DWVH					HIGH												
MS24374-10SRCL	10	RIGID	SINGLE	CURED ON	LOW	850	40	3	13-1/4	10	8	.656	4.875	6.750	7	8-1/2	3/4
MS24374-10SRCH					HIGH												
MS24374-10SRVL				DEMOUNTABLE	LOW												
MS24374-10SRVH					HIGH												
MS24374-10SWCL			SWIVEL	CURED	LOW												
MS24374-10SWCH					HIGH												
MS24374-10SWVL				DEMOUNTABLE	LOW												
MS24374-10SWVH					HIGH												
MS24374-10DRCL		RIGID	DUAL	CURED ON	LOW	1120	60										
MS24374-10DRCH					HIGH												
MS24374-10DRVL				DEMOUNTABLE	LOW												
MS24374-10DRVH					HIGH												
MS24374-10DWCL			SWIVEL	CURED ON	LOW												
MS24374-10DWCH					HIGH												
MS24374-10DWVL				DEMOUNTABLE	LOW												
MS24374-10DWVH					HIGH												

APPROVED 30 JAN 58 REVISED (B) For changes see sheets 1, 2, AND 3

PA Air Force - 11 Other Cust Air Force - 11 Army - GL Navy - YD	TITLE CASTERS, RIGID AND SWIVEL - PRECISION, SPRING MOUNTED	MILITARY STANDARD MS 24374
PROCUREMENT SPECIFICATION MIL-C-4751	SUPERSEDES	SHEET 2

DD FORM SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:53Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering design applications and for repetitive use shall be made from this document

Reviewers
Army - GL
Navy - YD
Air Force - 11, 69
DLA-IS

Users
WC, MO, CE

MS PART NO. (a)	A WHEEL DIA. NOM	(B) STYLE	(B) TYPE WHEEL	TYPE TIRE	TOTAL DEFLECTION	(B) RATED LOAD LB (MIN)	CASTER WEIGHT MAX. LB.	B (b) TREAD WIDTH AT BASE OF TIRE ±1/16	C OVERALL HEIGHT AT RATED LOAD ±1/4	D (c) SWIVEL CLEARANCE MAX.	D (c) SWIVEL CLEARANCE MIN.	E DIA. OF BOLT HOLES ±.004	F BOLT HOLE SPACING ±.010	G BOLT HOLE SPACING ±.010	H MAX. TOP PLATE WIDTH	J MAX. TOP PLATE LENGTH	K MAX. PLATE THICKNESS AT BOLT HOLES
MS24374-12SRCL	12	RIGID	SINGLE	CURED ON	LOW	950	50	3	15-1/2	11-4/2	9-3/4	656	4.875	6 750	7	8-1/2	3/4
MS24374-12SRCH					HIGH												
MS24374-12SRVL				DEMOUNTABLE	LOW												
MS24374-12SRVH					HIGH												
MS24374-12SWCL		SWIVEL		CURED ON	LOW												
MS24374-12SWCH					HIGH												
MS24374-12SWVL				DEMOUNTABLE	LOW												
MS24374-12SWVH					HIGH												
MS24374-12DRCL		RIGID	DUAL	CURED ON	LOW	1250	70										
MS24374-12DRCH					HIGH												
MS24374-12DRVL				DEMOUNTABLE	LOW												
MS24374-12DRVH					HIGH												
MS24374-12DWCL		SWIVEL		CURED ON	LOW												
MS24374-12DWCH					HIGH												
MS24374-12DWVL				DEMOUNTABLE	LOW												
MS24374-12DWVH					HIGH												
MS24374-16SRCL	16	RIGID	SINGLE	CURED ON	LOW	1660	70	4	19-1/2	15	12	.656	7.000	9.750	9	11	3/4
MS24374-16SRCH					HIGH												
MS24374-16SRVL				DEMOUNTABLE	LOW												
MS24374-16SRVH					HIGH												
MS24374-16SWCL		SWIVEL		CURED ON	LOW												
MS24374-16SWCH					HIGH												
MS24374-16SWVL				DEMOUNTABLE	LOW												
MS24374-16SWVH					HIGH												
MS24374-16DRCL		RIGID	DUAL	CURED ON	LOW	2440	120										
MS24374-16DRCH					HIGH												
MS24374-16DRVL				DEMOUNTABLE	LOW												
MS24374-16DRVH					HIGH												
MS24374-16DWCL		SWIVEL		CURED ON	LOW												
MS24374-16DWCH					HIGH												
MS24374-16DWVL				DEMOUNTABLE	LOW												
MS24374-16DWVH					HIGH												

(B) NOTE DELETED

APPROVED 30 JAN 58 REVISED (B) For changes see sheets 1, 2, AND 3

P A Air Force - 11

Other Cust
Air Force - 11
Army - GL
Navy - YD

TITLE
CASTERS RIGID AND SWIVEL - PRECISION, SPRING MOUNTED

MILITARY STANDARD
MS24374

PROCUREMENT SPECIFICATION
MIL-C-4751

SUPERSEDES

SHEET 3

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.