INCH-POUND

MS24378G
10 July 2015
SUPERSEDING
MS24378F
30 November 1966

DETAIL SPECIFICATION SHEET

TRANSMITTER, SYNCHRO, ANGLE OF ATTACK OR SIDESLIP

Inactive for new design after 30 November 1966.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-T-25627.

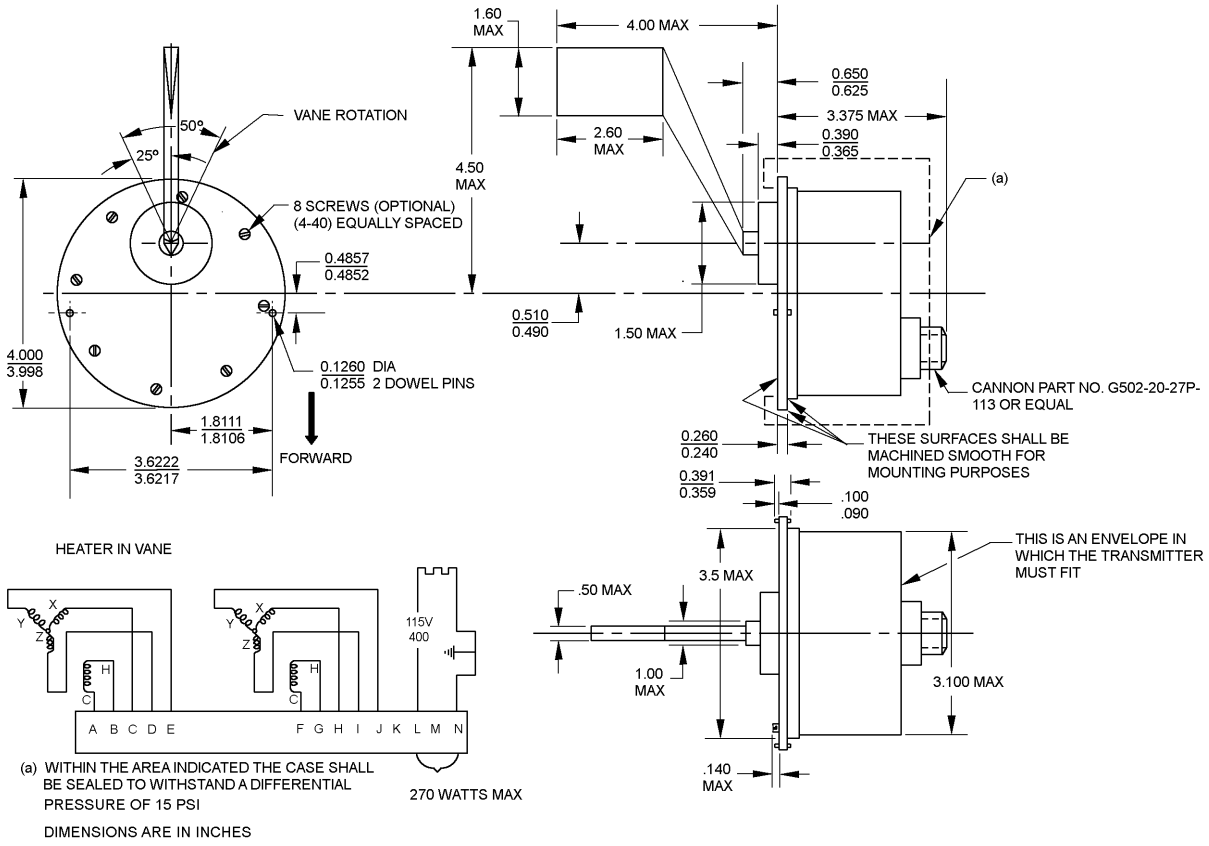


FIGURE 1. Type 1 angle of attack sensor.

AMSC N/A

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

FIGURE 1. Type 1 angle of attack sensor. – Continued.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.090	2.29	.365	9.27	.650	16.51	3.5	89
.100	2.54	.390	9.91	1.00	25.4	3.6217	91.991
.1255	3.188	.391	9.93	1.50	38.1	3.6222	92.004
.1260	3.200	.4852	12.324	1.60	40.6	3.998	101.55
.140	3.56	.490	12.45	1.8106	45.989	4.000	101.60
.240	6.10	.50	12.7	1.8111	46.002	4.00	101.6
.260	6.60	.510	12.95	2.60	66.0	4.50	114.3
.359	9.12	.625	15.88	3.100	78.74		

Notes:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

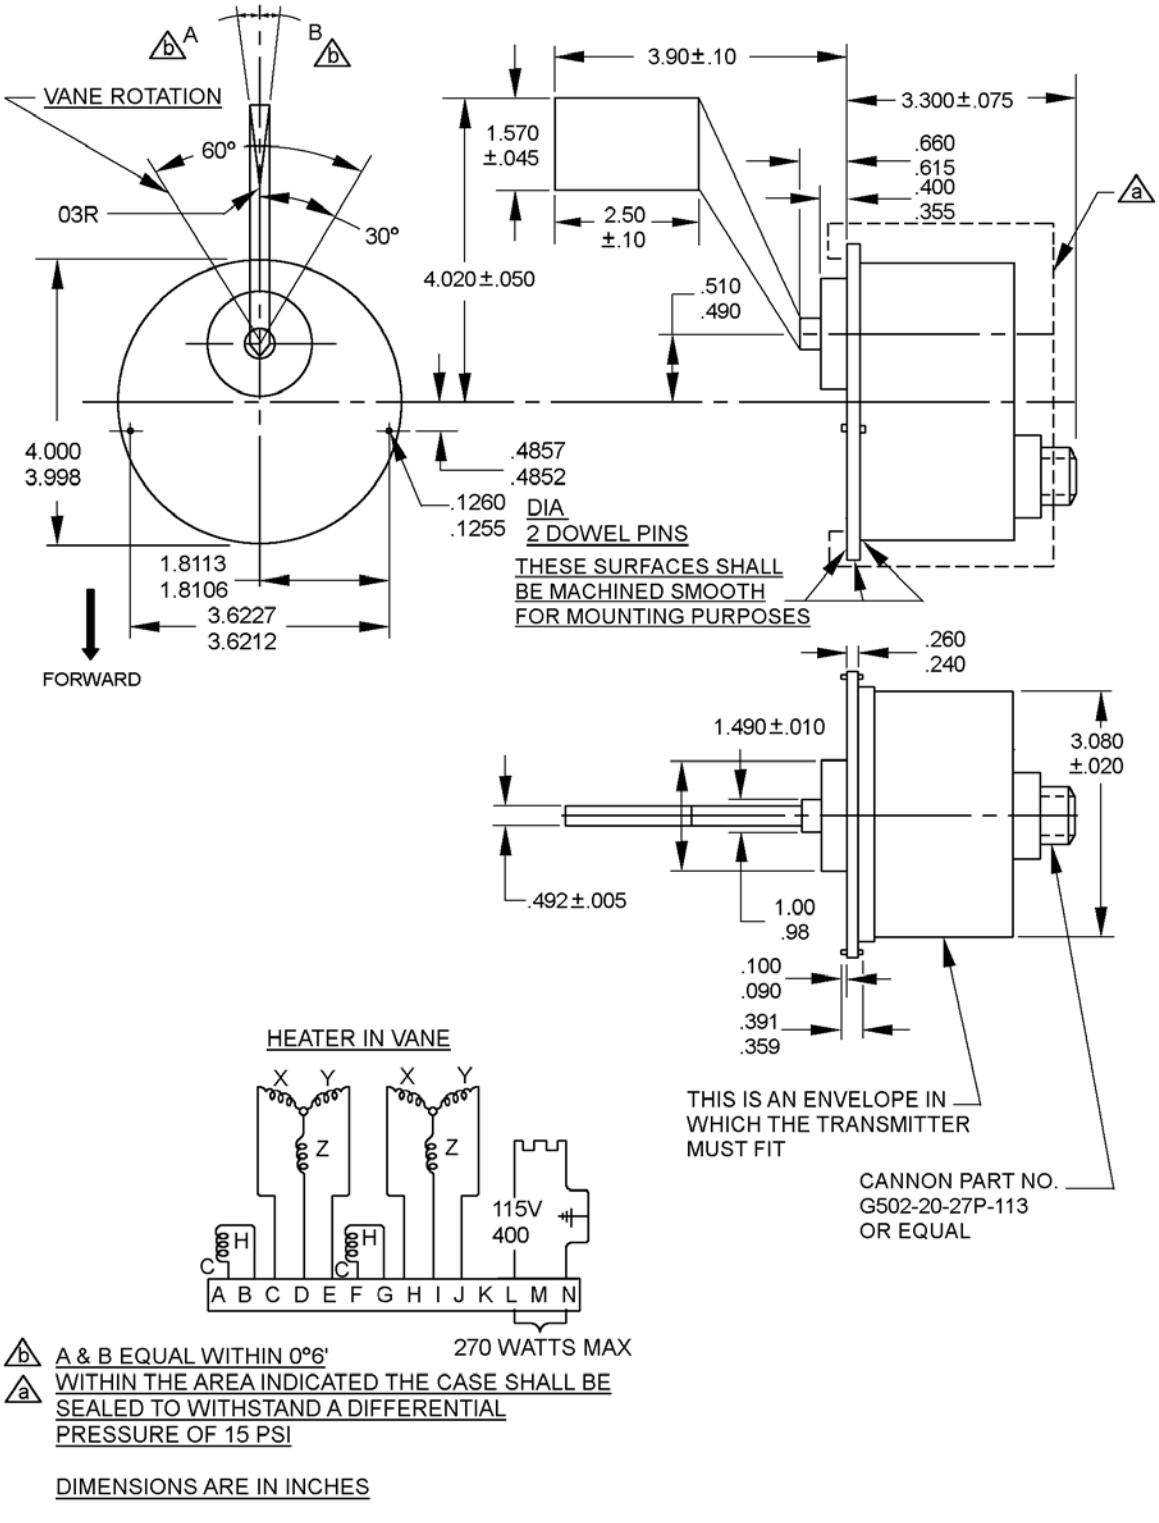


FIGURE 2. Type 2 angle of attack sensor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

FIGURE 1. Type 2 angle of attack sensor. – Continued.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.1255	3.188	.490	12.45	1.8113	46.007
.010	0.25	.1260	3.200	.492	12.50	2.50	63.5
.020	0.51	.240	6.10	.510	12.95	3.080	78.23
.045	1.14	.260	6.60	.615	15.62	3.300	83.82
.050	1.27	.355	9.02	.660	16.76	3.6212	91.978
.075	1.91	.359	9.12	.98	24.9	3.6227	92.017
.090	2.29	.391	9.93	1.00	25.4	3.90	99.1
.10	2.5	.400	10.16	1.490	37.85	3.998	101.55
.10	2.5	.4852	12.324	1.570	39.88	4.000	101.60
.100	2.54	.4857	12.337	1.8106	45.989	4.020	102.11

Notes:
1. Metric equivalents are given for information only.

REQUIREMENTS:

Design and dimensions are given on figure 1 and 2.

Angle of Attack Sensor Type: The angle of attack sensor type is given in table I.

TABLE I. Angle of attack sensor type.

Type	Description
1	± 25º vane rotation sensor
2	± 30º vane rotation sensor

Part or Identifying Number (PIN): The MS part number consists of the MS number with a dash after it and the angle of attack sensor type letter as follows:

MS24378 - X
- X: Angle of attack sensor type letter (see table I)
- MS24378: Military standard number

Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. This document references MIL-T-25627.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
DLA - CC

Review activities:
Air Force – 71, 99
DLA - GS

Preparing activity:
DLA - CC

(Project 5990-2015-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.