
FED. SUP CLASS
6685

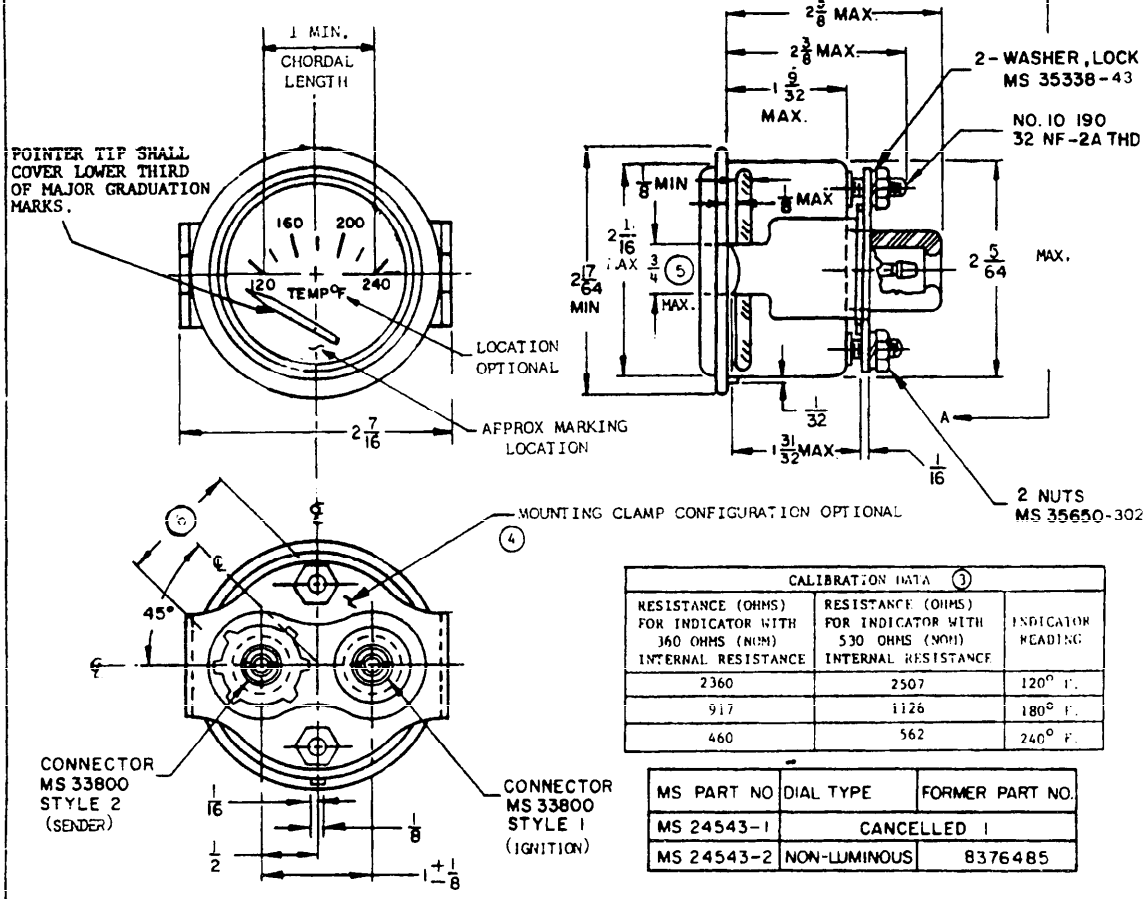

VIEW A-A

CALIBRATION DATA (3)		
RESISTANCE (OHMS) FOR INDICATOR WITH 360 OHMS (NOM) INTERNAL RESISTANCE	RESISTANCE (OHMS) FOR INDICATOR WITH 530 OHMS (NOM) INTERNAL RESISTANCE	INDICATOR READING
2360	2507	120° F.
917	1126	180° F.
460	562	240° F.

MS PART NO	DIAL TYPE	FORMER PART NO.
MS 24543-1	CANCELLED 1	
MS 24543-2	NON-LUMINOUS	8376485

(H) DENOTES CHANGE

USER ACTIVITIES: ARMY-ME; NAVY-YD, MC

REVIEWER ACTIVITIES: ARMY-ER, DLA-GS

APPROVED 27 OCTOBER 1958 REVISED (E) 11 SEPTEMBER 1978 (G) 25 SEP 1980 (H) 18 DEC 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

F.A. ARMY-AT Other Cust AF-99	Title INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE: 24 VOLT DC, RANGE 120°-240°F	MILITARY STANDARD MS24543
PROCUREMENT SPECIFICATION MIL-I-10986	SUPERSEDES.	SHEET 1 OF 2

DD FORM SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6685-0773

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6685

REVIEWER ACTIVITIES:
ARMY-ER, DLA-GS

USER ACTIVITIES:
ARMY-ME; NAVY-YD, MC

REQUIREMENTS:

1. REPLACEMENT DATA: MS24543-2 IS THE REPLACEMENT FOR MS24543-1.
2. TYPE II (TEMPERATURE) UNIT 1 (INDICATOR) OF PROCUREMENT SPECIFICATION.
3. MUST OPERATE LINEARLY AND ACCURATELY WHEN PROPERLY CONNECTED IN A CIRCUIT WITH ASSOCIATED TRANSMITTER, MS24537.
4. RELATIVE LOCATION AND CONFIGURATION OF CONNECTORS AND MOUNTING CLAMP IS OPTIONAL, PROVIDED THAT DIAL ILLUMINATION IS NOT ADVERSELY AFFECTED.
5. MOUNTING CLAMP TIPS SHALL BE SHARP TO ASSURE GROUNDING.
6. FOUR (4) ILLUMINATING WINDOWS, 1-5/32 MINIMUM CHORDAL LENGTH, EQUALLY SPACED 45° OFF HORIZONTAL CENTERLINE (360° ILLUMINATING WINDOW OPTIONAL).
7. (H) UNLESS OTHERWISE SPECIFIED, STEEL PARTS SHALL BE ZINC PLATED IN ACCORDANCE WITH TYPE II, SERVICE CONDITION 1 OF ASTM B633-78.
8. CENTERLINE OF DIAL FACE SHALL BE WITHIN ± 2° OF INDICATOR VERTICAL AXIS. VERTEX OF ANGULAR DIMENSIONS IS LOCATED AT POINTER PIVOT.
9. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.
10. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES ARE ± 1/64 ON FRACTIONS, ± 1° ON ANGULAR DIMENSIONS.
11. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 27 OCTOBER 1958 REVISED (H) FOR CHANGES SEE SHEETS 1 & 2 18 DEC 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. ARMY-AT Other Cust AF-99	TITLE INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE: 24 VOLT DC, RANGE 120°-240°F	MILITARY STANDARD MS24543
PROCUREMENT SPECIFICATION MIL-I-10986	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 6685-0773

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.