FED SUP CLASS
5320

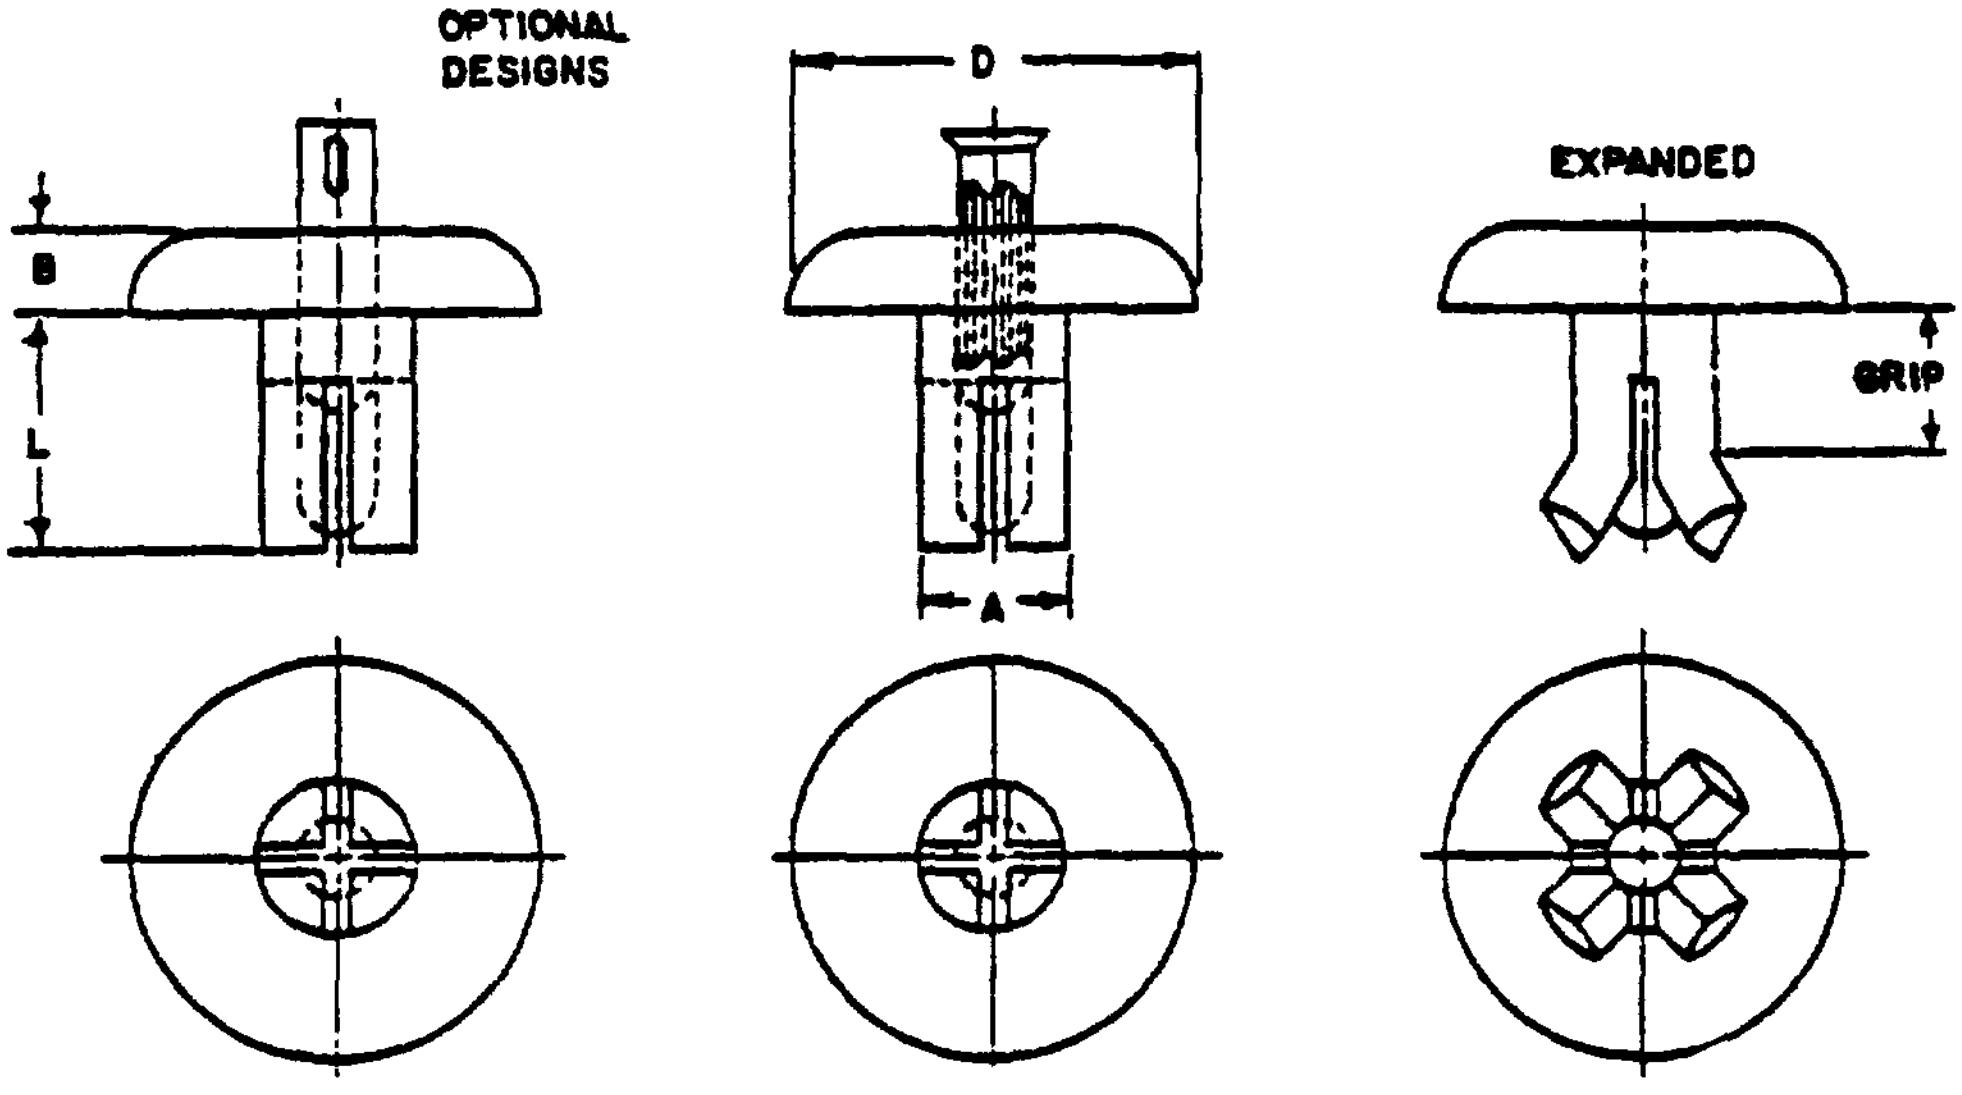

REVISED: AT, AV, IS, ME, MI, MO, MSA, OS
USER: AS, EL, GL, MC, SH

NOTES.

1. MATERIAL. Body for aluminum alloy rivet per QQ-A-430, composition 2117-T4 or 5056-H32.
   Body for carbon steel rivet per Federal Standard No. 66, AISI Nos. C1006 thru C1041.
   Pins (for aluminum alloy, composition 2117-T4 rivets) per Federal Standard No. 66, CRES 300 Series.
   Pins (for aluminum alloy, composition 5056-H32 rivets) per Federal Standard No. 66, CRES 305 only.
   Pins (for carbon steel rivets) per Federal Standard No. 66, CRES 300 Series or carbon steel.
2. PROTECTIVE COATING: Steel rivet bodies and pins shall be cadmium plated per QQ-P-416, type II, class 2.
   Corrosion resisting steel pins shall be passivated per QQ-P-35.
   Aluminum rivet bodies, composition 2117-T4 shall be anodized per MIL-A-8625 or chemically treated per MIL-C-5541.
   It is not necessary to anodize composition 5056-H32 aluminum rivet bodies.
3. HEAT TREATMENT: Rivets shall be heat treated in accordance with procurement specification.
4. DIMENSIONS All dimensions are in inches.
5. TOLERANCES.

Rivet Diameter	Aluminum Rivets	Steel Rivets
1/8	±.002	+.002 -.004
5/32	±.002	+.002 -.004
3/16	+.002 -.003	+.002 -.004
1/4	+.002 -.003	+.002 -.004

6. PART NUMBER: The MS part number consists of the MS number plus the dash number.
   Example: MS24662-5.
7. The slotted shanks of 1/8 inch rivets may produce 2 thru 4 expanding segments. Slotted rivet shanks above 1/8 inch may produce 3 or 4 expanding segments.
8. Illustrations are for identification and are not intended to restrict designs and shapes of rivets which otherwise conform to requirements.
9. For blind side protrusion, the maximum overall length less panel thickness shall be used.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
11. Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓑ ENTIRE STANDARD REVISED

APPROVED 29 FEB 60 REVISED Ⓐ 30 JUN 1965 Ⓑ 28 OCT 70

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust YD 82	TITLE RIVET, BLIND - UNIVERSAL HEAD, DRIVE TYPE	MILITARY STANDARD MS24662	
PROCUREMENT SPECIFICATION MIL-R-27384	SUPERSEDES In part, MS20604 and MS20606	SHEET 1 OF 3	

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5320

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEW: AT, AV, EP, ME, MI, NW, NSA, OS
USER: AS, EL, GL, MC, SH

TABLE I

ALUMINUM		CARBON STEEL	DIA A SEE NOTE 5	HEAD HEIGHT B +0.010 -0.000	HEAD DIAMETER D	RECOMMENDED DRILL SIZE	GRIP LENGTH G		LENGTH L +0.030 -0.010
2117	5056						MIN	MAX	
DASH NUMBER									
3	170	4	0.125	0.054	0.250 ± 0.012	30 (0.128)	0.046	0.078	0.156
5	171	6					.079	.109	.188
7	172	8					.110	.140	.219
9	173	10					.141	.171	.250
11	174	12					.172	.203	.281
13	175	14					.204	.234	.312
15	176	16					.235	.265	.344
17	177	18					.266	.296	.375
19	178	20					.297	.328	.406
21	179	22					.329	.359	.438
23	180	24					.360	.390	.469
25	181	26					.391	.421	.500
27	182	28	0.156	0.067	0.312 ± 0.016	20 (0.161)	0.046	0.078	0.188
29	183	30					.079	.109	.219
31	184	32					.110	.140	.250
33	185	34					.141	.171	.281
35	186	36					.172	.203	.312
37	187	38					.204	.234	.344
39	188	40					.235	.265	.375
41	189	42					.266	.296	.406
43	190	44					.297	.328	.438
45	191	46					.329	.359	.469
47	192	48					.360	.390	.500
49	193	50					.391	.421	.531
51	194	52					.422	.453	.562
53	195	54					.454	.484	.593
55	196	56					.485	.515	.625
57	197	58					.516	.546	.656
59	198	60					.547	.578	.688
61	199	62					.579	.609	.718
63	200	64					.610	.640	.750
150	201	221	0.188	0.080	0.375 ± 0.019	11 (0.191)	0.046	0.109	0.250
151	202	222					.110	.171	.281
152	203	223					.172	.234	.344
153	204	224					.235	.296	.406
154	205	225					.297	.359	.469
155	206	226					.360	.421	.531
156	207	227					.422	.484	.594
157	208	228					.485	.546	.656
158	209	229					.547	.609	.719
159	210	230					.610	.671	.781
160	211	231	0.250	0.107	0.500 ± 0.025	F (0.257)	0.046	0.109	0.250
161	212	232					.110	.171	.281
162	213	233					.172	.234	.344
163	214	234					.235	.296	.406
164	215	235					.297	.359	.469
165	216	236					.360	.421	.531
166	217	237					.422	.484	.594
167	218	238					.485	.546	.656
168	219	239					.547	.609	.719
169	220	240					.610	.671	.781

APPROVED 29 FEB 60   REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2 Ⓑ FOR CHANGES SEE SHEET 1

P.A. WC Other Cust TD 82	TITLE RIVET, BLIND-UNIVERSAL HEAD, DRIVE TYPE	MILITARY STANDARD MS 24662
PROCUREMENT SPECIFICATION MIL-R-27384	SUPERSEDES In part, MS20604 and MS20606	SHEET 2 OF

FED SUP CLASS
5320

REVIEW: AT, AV, IS, ME, MI, MU, MSA, GS
USER: AS, EL, OL, MC, SM

TABLE II - INTERCHANGEABILITY

The rivets covered by dash numbers given in Revision A of this standard and MS20604 in part, and MS20606 in part, are cancelled after 28 OCT 1970. Use the dash numbers given in the preceding sheets of this revision. The cancelled rivets cannot always replace the new rivets and should be used until existing stocks are depleted. Use only the new rivets for design and replacement. Replacement shall be in accordance with this table.

DASH NUMBER		DASH NUMBER		DASH NUMBER		DASH NUMBER		DASH NUMBER	
CANCELLED	NEW	CANCELLED	NEW	CANCELLED	NEW	CANCELLED	NEW	CANCELLED	NEW
MS24662	MS24662	MS24662	MS24662	MS20604 &	MS24662	MS20604 &	MS24662	MS20604 &	MS24662
"A" REV	"B" REV	"A" REV	"B" REV	MS20606	"B" REV.	MS20606	"B" REV.	MS20606	"B" REV
1	●	126	236	AD6H2	150	B5H2	182	M4H2	▬
65	150	127	166	AD6H2	151	B5H2	183	M4H3	▬
66	221	128	237	AD6H4	151	B5H2	184	M4H4	▬
67	150	129	166	AD6H4	152	B5H4	184	M4H5	▬
68	221	130	237	AD6H4	153	B5H4	185	M4H6	▬
69	151	131	167	AD6H6	153	B5H4	186	M4H7	▬
70	222	132	238	AD6H6	154	B5H4	187	M4H8	▬
71	151	133	167	AD6H6	155	B5H4	188	M5H2	▬
72	222	134	238	AD6H8	155	B5H6	188	M5H4	▬
73	152	135	168	AD6H8	156	B5H6	189	M5H6	▬
74	223	136	239	AD6H8	157	B5H6	190	M5H8	▬
75	152	137	168	AD6H10	157	B5H6	191	M6H2	▬
76	223	138	239	AD6H10	158	B5H6	192	M6H4	▬
77	153	139	169	AD6H10	159	B5H8	192	M6H6	▬
78	224	140	240	AD6H12	159	B5H8	193	M6H8	▬
79	153			AD6H14	●	B5H8	194	M6H10	▬
80	224	MS20604		AD8H2	160	B5H8	195	M6H12	▬
81	154	AD3H1	●	AD8H2	161	B5H8	196	M6H14	▬
82	225	AD3H2	●	AD8H4	161	B6H2	201	M8H2	▬
83	154	AD3H3	●	AD8H4	162	B6H2	202	M8H4	▬
84	225	AD3H4	●	AD8H4	163	B6H4	202	M8H6	▬
85	155			AD8H6	163	B6H4	203	M8H8	▬
86	226	MS20604		AD8H6	164	B6H4	204	M8H10	▬
87	155	and		AD8H6	165	B6H6	204	M8H12	▬
88	226	MS20606		AD8H8	165	B6H6	205	M8H14	▬
89	156	AD4H1	3	AD8H8	166	B6H6	206	M8H16	▬
90	227	AD4H2	3	AD8H8	167	B6H8	206		
91	156	AD4H2	5	AD8H10	167	B6H8	207	MS20604	
92	227	AD4H2	7	AD8H10	168	B6H8	208	MP3H1	▬
93	157	AD4H3	7	AD8H10	169	B6H10	208	MP3H2	▬
94	228	AD4H3	9	AD8H12	169	B6H10	209	MP3H3	▬
95	157	AD4H3	11	AD8H14	●	B6H10	210	MP3H4	▬
96	228	AD4H4	11	AD8H16	●	B6H12	210		
97	156	AD4H4	13			B6H14	●	MS20604	
98	229	AD4H4	15	MS20604		B8H2	211	and	
99	158	AD4H5	15	B3H1	●	B8H2	212	MS20606	
100	229	AD4H5	17	B3H2	●	B8H4	212	MP4H1	▬
101	159	AD4H5	19	B3H3	●	B8H4	213	MP4H2	▬
102	230	AD4H6	19	B3H4	●	B8H4	214	MP4H3	▬
103	160	AD4H6	21			B8H6	214	MP4H4	▬
104	231	AD4H6	23	MS20604		B8H6	215	MP4H5	▬
105	160	AD4H7	23	and		B8H6	216	MP4H6	▬
106	231	AD4H7	25	MS20606		B8H8	216	MP4H7	▬
107	161	AD4H8	●	B4H1	170	B8H8	217	MP4H8	▬
108	232	AD5H2	27	B4H2	170	B8H8	218	MP5H2	▬
109	161	AD5H2	29	B4H2	171	B8H10	218	MP5H4	▬
110	232	AD5H2	31	B4H2	172	B8H10	219	MP5H6	▬
111	162	AD5H4	31	B4H3	172	B8H10	220	MP5H8	▬
112	233	AD5H4	33	B4H3	173	B8H12	220	MP6H2	▬
113	162	AD5H4	35	B4H3	174	B8H14	●	MP6H4	▬
114	233	AD5H4	37	B4H4	174	B8H16	●	MP6H6	▬
115	163	AD5H4	39	B4H4	175			MP6H8	▬
116	234	AD5H6	39	B4H4	176	MS20604		MP6H10	▬
117	163	AD5H6	41	B4H5	176	M3H1	▬	MP6H12	▬
118	234	AD5H6	43	B4H5	177	M3H2	▬	MP6H14	▬
119	164	AD5H6	45	B4H5	178	M3H3	▬	MP8H2	▬
120	235	AD5H6	47	B4H6	178	M3H4	▬	MP8H4	▬
121	164	AD5H8	47	B4H6	179			MP8H6	▬
122	235	AD5H8	49	B4H6	180	MS20604		MP8H8	▬
123	165	AD5H8	51	B4H7	180	and		MP8H10	▬
124	236	AD5H8	53	B4H7	181	MS20606		MP8H12	▬
125	165	AD5H8	55	B4H8	●	M4H1	●	MP8H14	▬
								MP8H16	▬

● No Replacement
▬ Not Manufactured

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 FEB 60 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2 Ⓑ FOR CHANGES SEE SHEET 1

P.A. WC Other Cust YD 82	TITLE RIVET, BLIND-UNIVERSAL HEAD, DRIVE TYPE	MILITARY STANDARD MS 24662
PROCUREMENT SPECIFICATION MIL-R-27384	SUPERSEDES: In part MS20604 and MS20606	SHEET 3 OF

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE