FED. SUP CLASS
5945

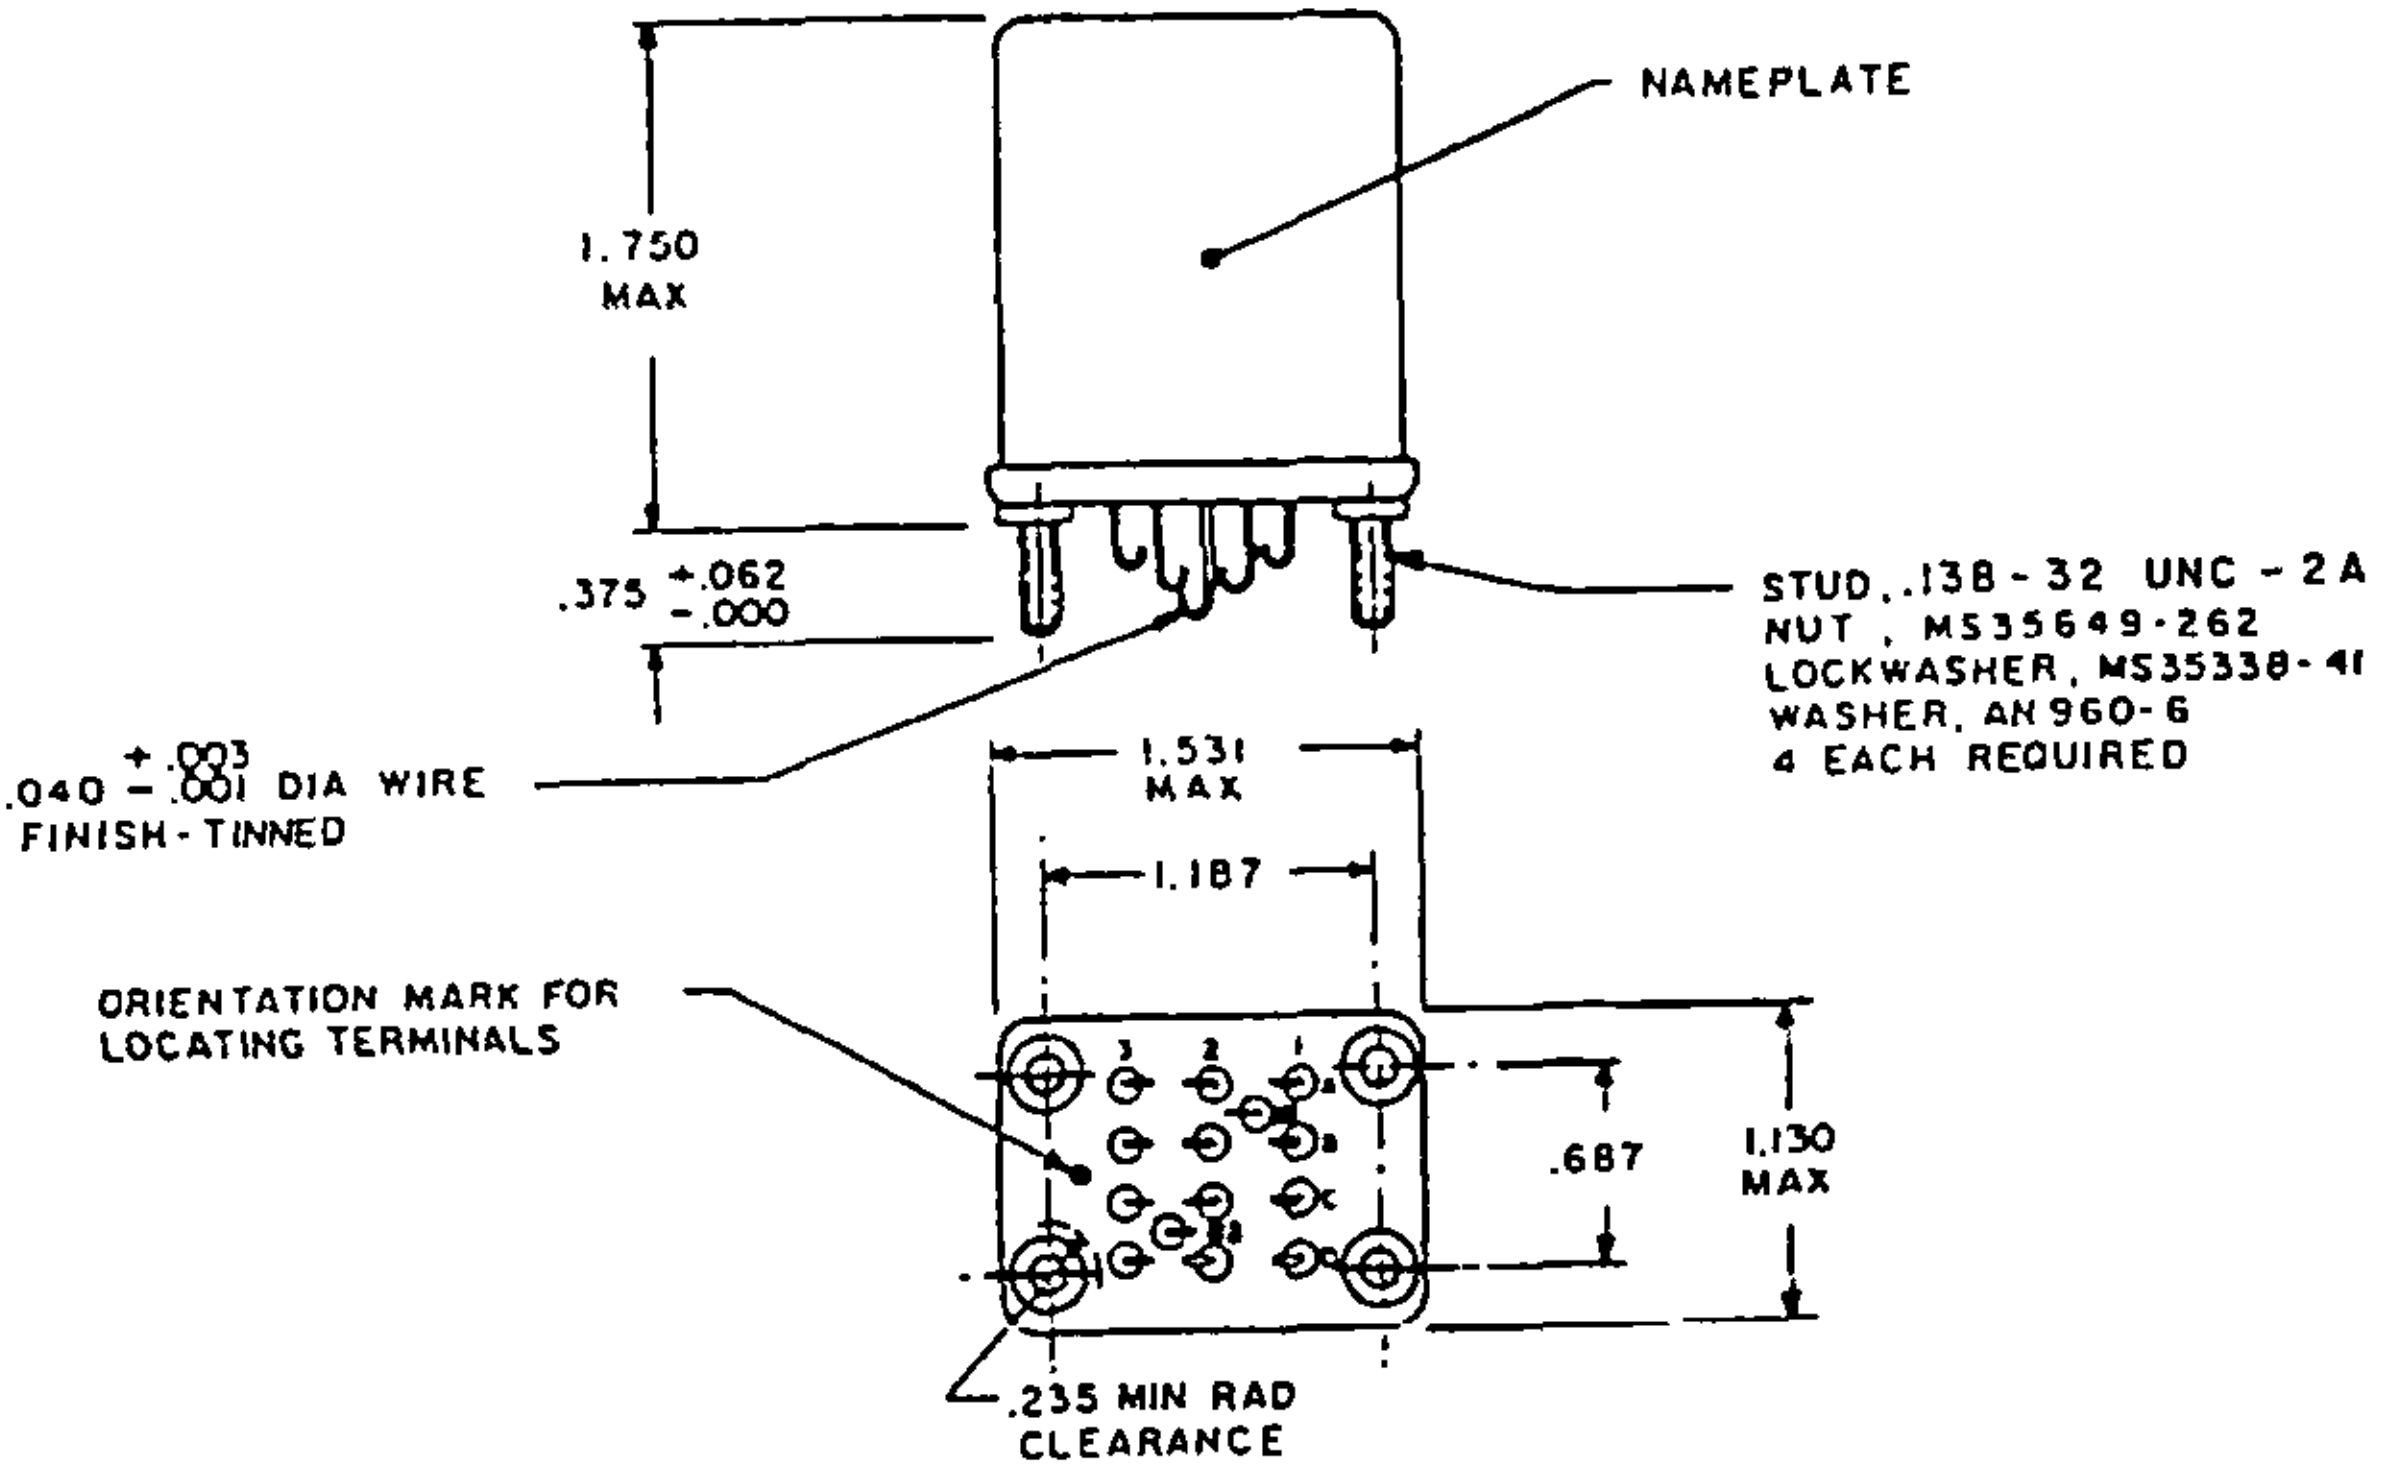



CIRCUIT DIAGRAM
(SEE NOTE 5)

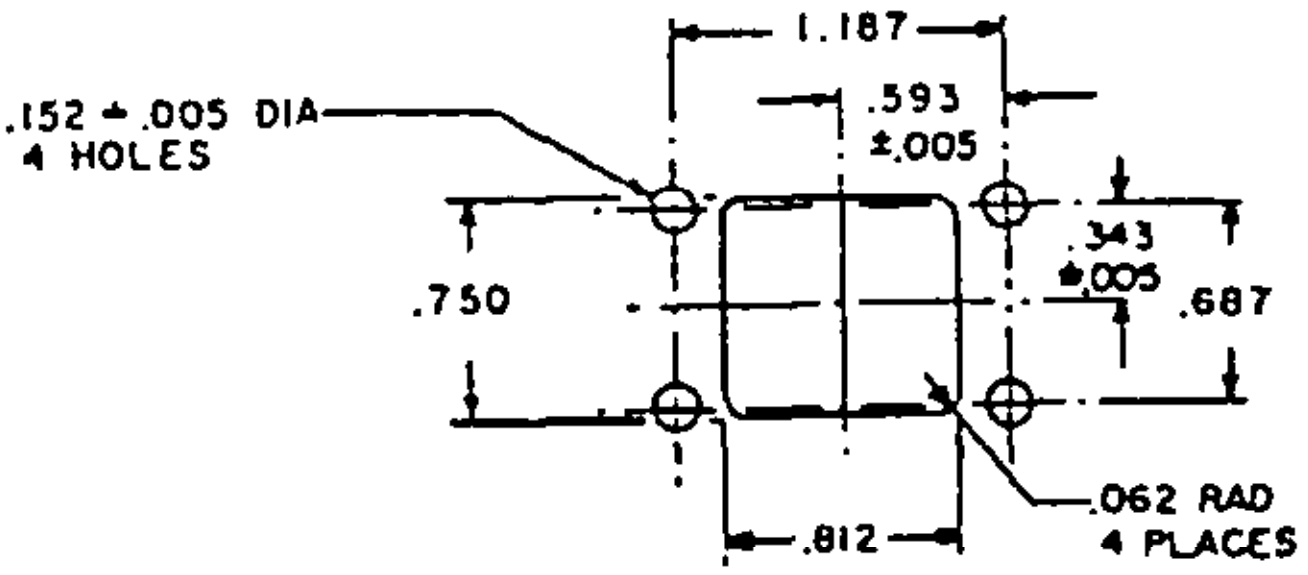

MOUNTING HOLE LAYOUT

Ⓖ ENTIRE STANDARD REVISED

APPROVED 17 March 1958 REVISED Ⓖ 8 JUNE 87

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army -
Navy -
Air Force -

Review activities: Army - EC
Navy -
Air Force - 11, 99

P.A USAF - 85 Other Cust Navy - AS	International interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD MS25267
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 1 OF 5

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5945

Inches	mm	Inches	mm
.001	0.03	.375	9.53
.003	0.08	.593	15.06
.005	0.13	.687	17.45
.040	1.02	.750	19.05
.062	1.57	.812	20.62
.138	3.51	1.130	28.70
.152	3.86	1.187	30.15
.235	5.97	1.531	38.89
.343	8.71	1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).
4. Terminal numbers need not appear on relay headers provided there is affixed to the relay a suitable legible circuit diagram that permanently and positively identifies each terminal location specified herein.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.
6. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

TABLE I. Dash numbers and characteristics.

Dash number MS25267-	Type	Coil	Terminal type	Mounting	Max weight in pounds
D1	I	dc	Solder hook	Stud	.32
A1	I	ac	Solder hook	Stud	.32

User activities: Army -
Navy -
Air Force -

Review activities: Army - EC
Navy -
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 17 March 1958 REVISED (G) ENTIRE STANDARD REVISED.

P.A USAF - 85 Other Cust Navy - AS	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD MS25267
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 2 OF 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

FED. SUP CLASS
5945

TABLE II. Operating characteristics.

MS part no. MS25267-	Coil data											Time (milliseconds max)					
	Coil	Nominal			Max		Max pick-up voltage			Drop-out voltage 3/	Hold voltage 3/	Operate 4/	Release 5/	Contact bounce			
														Main		Aux	
		Volts 1/	Freq. Hz	Res Ω ±10%	Volts	Amperes	Normal 3/	High temp test	Cont current test					NO	NC	NO	NC
01	X1, X2	28	dc	248	29	0.15	18	19.8	22.5	1.5	7.0	20	20	2	2		
A1	X1, X2	115	400 2/	N/A	122	0.05	90	95	103	5.0	30	25	50	2	2		

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
2/ MS25267-A1 may be used on 60 Hz if maximum ambient temperature is limited to 85°C, maximum current will be 0.044 ampere.
3/ Over the temperature range.
4/ With nominal coil voltage.
5/ From nominal coil voltage.

APPROVED 17 March 1958 REVISED (G) ENTIRE STANDARD REVISED

P.A USAF - 85 Other Cust Navy - AS	International interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD MS25267
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 3 OF 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - EC
Navy -
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Intmd current	Applicable per specification													

1/ Absence of value indicates relay is not rated for 3-phase applications. (See MS27218 for polyphase applications).
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

FED. SUP CLASS
5945

APPROVED 17 March 1958 REVISED Ⓖ ENTIRE STANDARD REVISED.

P.A USAF - 85
Other Cust
Navy - AS

International interest

Procurement Specification
MIL-R-6106

TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES,
4 PDT, TYPE 1, SOLDER HOOK,
HERMETICALLY SEALED

SUPERSEDES:

MILITARY STANDARD

MS25267

DD FORM 1 MAY 73 672

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

FED. SUP CLASS
5945

Environmental characteristics

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 G
Duration	11 ms
Max duration contact opening	10 μs
Vibration - sinusoidal	
G-level	10 G
Frequency range	5 - 1,500 Hz
Vibration - random	
Applicable specification	N/A
Power spectral density	N/A
RMS G min	N/A
Frequency range	N/A
Curve	N/A
High shock	N/A
Acceleration	15 G

Electrical characteristics

Insulation resistance, initial	100 megohms
After life or environmental tests	50 megohms

Dielectric strength (sea level)

	Initial	After life tests
Coil to case	1,000 V rms	1,000 V rms
Aux contacts		
All other points	1,000 V rms	1,000 V rms

Dielectric strength (altitude)

		80,000 ft
Coil to case		250 V rms
Aux contacts		
All other points		250 V rms

Max contact drop initial	0.150 volt
After life test	0.175 volt
Overload current	20 amperes
Rupture current	25 amperes
Duty rating	Continuous
RFI specification	MIL-STD-461

(Applicable to coil circuits of ac operated relays)

APPROVED 17 March 1958 REVISED Ⓖ ENTIRE STANDARD REVISED

P.A USAF - 85 Other Cust Navy - AS	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD MS 25267
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 5 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE