


FED. SUP CLASS
5935

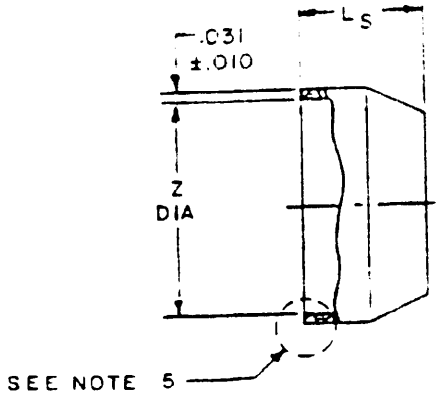



STRAIGHT BOOT -1

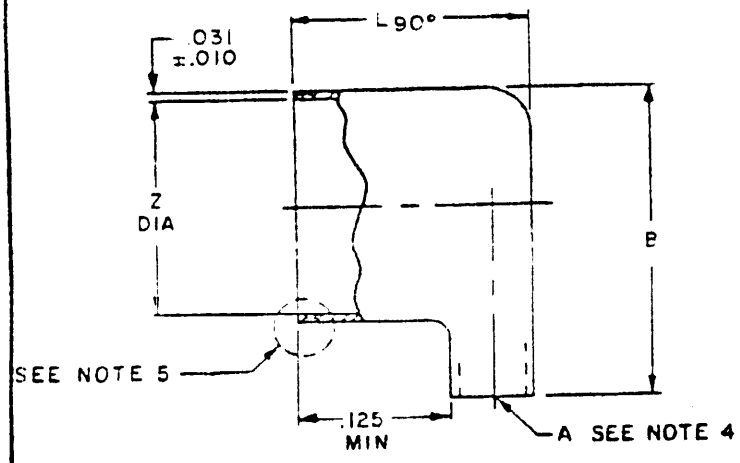

90° ELBOW -2

EXAMPLE OF PART NUMBER

MS27486 -12 - 1

MS NO — SHELL SIZE — BOOT GEOMETRY

-1 STRAIGHT
-2 90° ELBOW

Ⓔ CANCELED; FOR PROCUREMENT USE MIL-C-85049/75

Ⓔ DENOTES CHANGE

APPROVED 8 SEPT 66 REVISED Ⓔ 22 JULY 88

User activities: Army - Navy - Air Force -

Revised activities: Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A AF-85 Other Cust ARMY-CR NAVY-AS	International interest	TITLE BOOT, POTTING, ELECTRICAL CONNECTOR, SERIES II	MILITARY STANDARD MS27486
Procurement Specification MIL-C-38999		SUPERSEDES MS27486 (USAF)	PAGE 1 OF 2

AMSC N/A (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-3681-02

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:41Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SHELL SIZE	A MIN CROSS-SECTION AREA IN SQ	B MAX	L S MAX	L 90° MAX	X MIN ID	Z 1.000 -.010 DIA
8	.073	.766	.297	.436	.434	.532
10	.117	.891		.469	.548	.657
12	.206	1.031		.562	.673	.781
14	.384	1.156		.719	.798	903
16	.443	1.287		.781	.899	1.021
18	.561	1.406		.844	1.024	1.145
20	.693	1.531		.906	1.149	1.270
22	.840	1.656		.938	1.274	1.395
24	.999	1.781		1.031	1.399	1.520

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	.25	.532	13.51	.844	21.44	1.156	29.36
.031	.79	.548	13.92	.891	22.63	1.270	32.23
.073	1.85	.561	14.25	.899	22.83	1.274	32.36
.117	2.97	.562	14.27	.903	22.94	1.287	32.69
.125	3.18	.657	16.69	.906	23.01	1.395	35.43
.206	5.23	.673	17.09	.938	23.83	1.399	35.53
.297	7.54	.693	17.60	.999	25.37	1.406	35.71
.384	9.75	.719	18.26	1.021	25.93	1.520	38.61
.434	11.02	.766	19.46	1.024	26.01	1.531	38.89
.438	11.13	.781	19.84	1.031	26.19	1.656	42.06
.443	11.25	.798	20.27	1.145	29.08	1.781	45.24
.469	11.91	.840	21.34	1.149	29.18		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material: translucent nylon.
4. Entrance configuration optional with indicated cross-section area.
5. A retaining undercut to facilitate attachment of boot to boot ring (MS27485) is permissible.
6. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issued listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 8 SEPT 66 REVISED (E) FOR CHANGES SEE PAGE 1

User activities: Army - Navy - Air Force -

Review activities: Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	International interest	TITLE	MILITARY STANDARD
AF-85 Other Cust ARMY-CR NAVY-AS		BOOT, POTTING, ELECTRICAL CONNECTOR, SERIES II	MS27486
Procurement Specification MIL-C-38999		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.