
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


FED. SUP CLASS. 6685

DRILL NO. 50 (.070) 2 HOLES

THE TWO .070 INCH HOLES ARE PROVIDED FOR SAFETY WIRING. ALTERNATE LOCATION ACROSS OPPOSITE CORNERS IS ACCEPTABLE

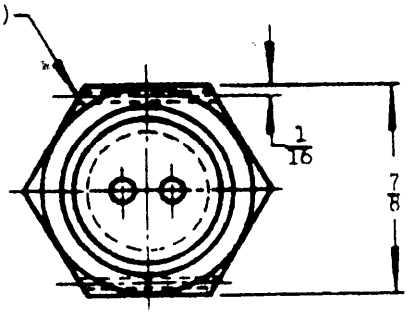

STAMP OR ENGRAVE MS PART NO.
MANUFACTURER's PART NO.
NAME OF MANUFACTURER
MANUFACTURER'S SERIAL NO.

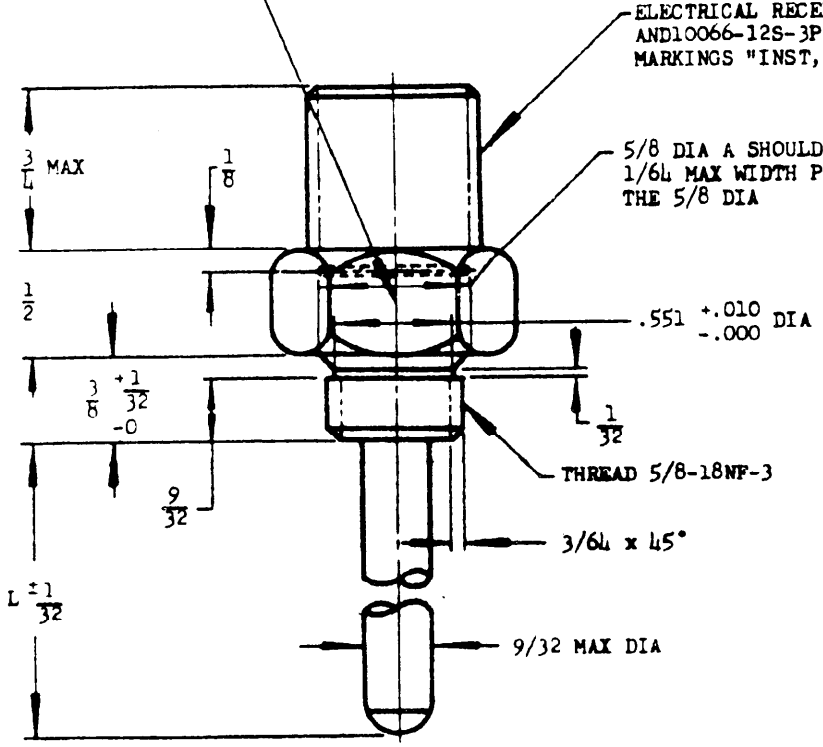

MS PART NO.	LENGTH "L"
MS28034-1	1-7/8
MS28034-2	4

THE CENTERLINE THROUGH THE ALIGNMENT KEY IN THE RECEPTACLE SHALL BE PERPENDICULAR TO THE CENTERLINE THROUGH THE PINS. THE POSITION OF THE PINS RELATIVE TO THE FLATS ON THE HEXAGONAL IS OPTIONAL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, ANGLES ±2°.

THIS BULB TO BE FURNISHED WITH GASKET AN900-10.

REFERENCED SPECIFICATIONS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

(A) SHEET NO. 2 ADDED.

APPROVED 21 Nov 52 REVISED (A) 21 Mar 55

CUSTODIANS	OTHER INT.
Navy - BuAer	A - T
Air Force	N - S
Army-SigC	AF -

MILITARY STANDARD

BULBS, TEMPERATURE, ELECTRICAL RESISTANCE (-70°C TO +300°C)

MS28034

Procurement Specification MIL-B-7990


SUPERSEDES: DRAWING AN5525

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
6685

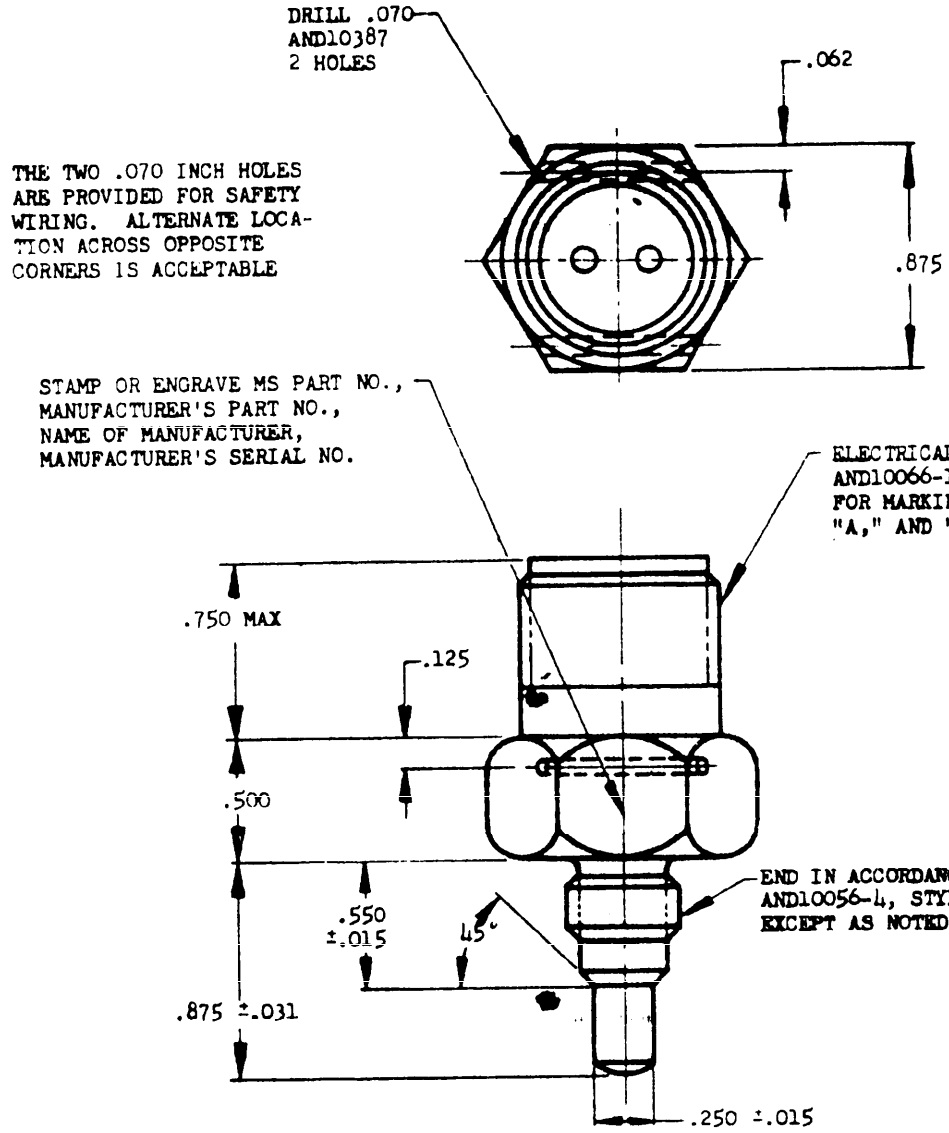

MS PART NO.	FIIN
MS28034-3	

THE CENTERLINE THROUGH THE ALIGNMENT KEY IN THE RECEPTACLE SHALL BE PERPENDICULAR TO THE CENTERLINE THROUGH THE PINS. THE POSITION OF THE PINS RELATIVE TO THE FLATS ON THE HEXAGONAL IS OPTIONAL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±1/2°.

THE BULB TO BE FURNISHED WITH GASKET AN900-7.

APPROVED 24 Mar 55 REVISED

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS28034
Navy - BuAer Air Force Army-SigC	A - T N - S AF -	BULBS, TEMPERATURE, ELECTRICAL RESISTANCE (-70°C TO +300°C)	
Procurement Specification: MIL-B-7990		SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.