

FED. SUP CLASS
6130

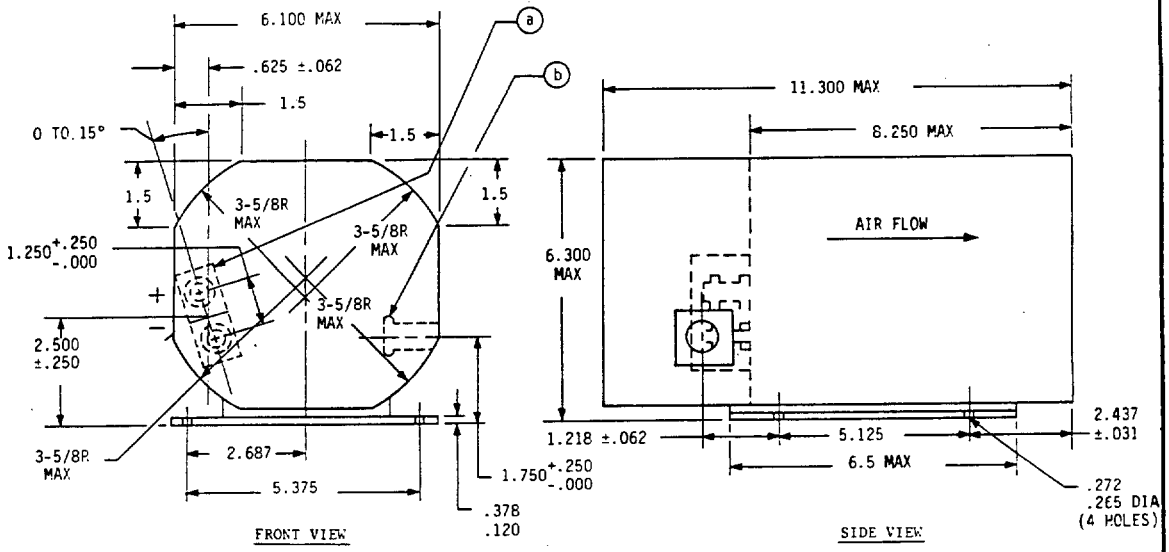

(a) 3/8-24UNF-2A TERMINAL STUDS (2 REQUIRED) (IN ACCORDANCE WITH HANDBOOK H28)

(b) RECEPTACLE TO FIT PLUG MS3106R-20-18S OR MS3459W-20-18S

AC INPUT	
VOLTAGE RANGE	112.5-117.5 VOLTS
FREQUENCY RANGE	380-420 HERTZ
DC OUTPUT	
VOLTAGE	SEE FIGURE 2
MAXIMUM LOAD CURRENT	200 AMPERES
MINIMUM LOAD CURRENT	2.0 AMPERES
WEIGHT (LBS)	17.5 (MAX)

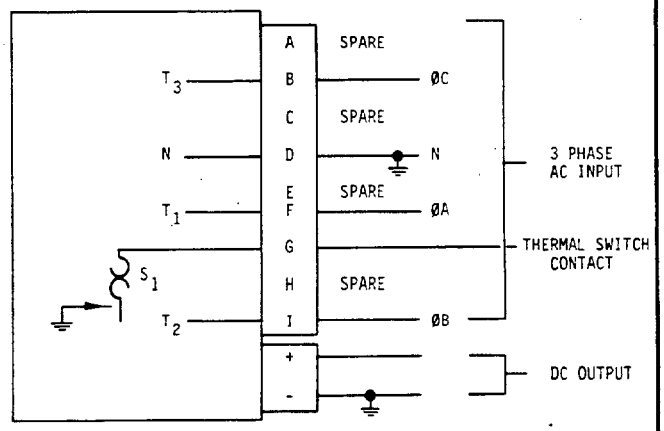

S_1 = THERMAL SWITCH NORMALLY OPEN

FIGURE 1. CONNECTION DIAGRAM.

MS PART NO.
MS28132-1

(J) ENTIRE STANDARD REVISED

APPROVED 9 AUG 1960 REVISED (J) 30 SEPT 1988

P.A. NAVY — AS Other Cust	TITLE: CONVERTER, 200 AMPERE, CLASS B NONREGULATED, AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28132(AS)
PROCUREMENT SPECIFICATION MIL-C-7115	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 22000

PROJECT NO. 6130-N296

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED. This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:

USER SYMBOLS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6130

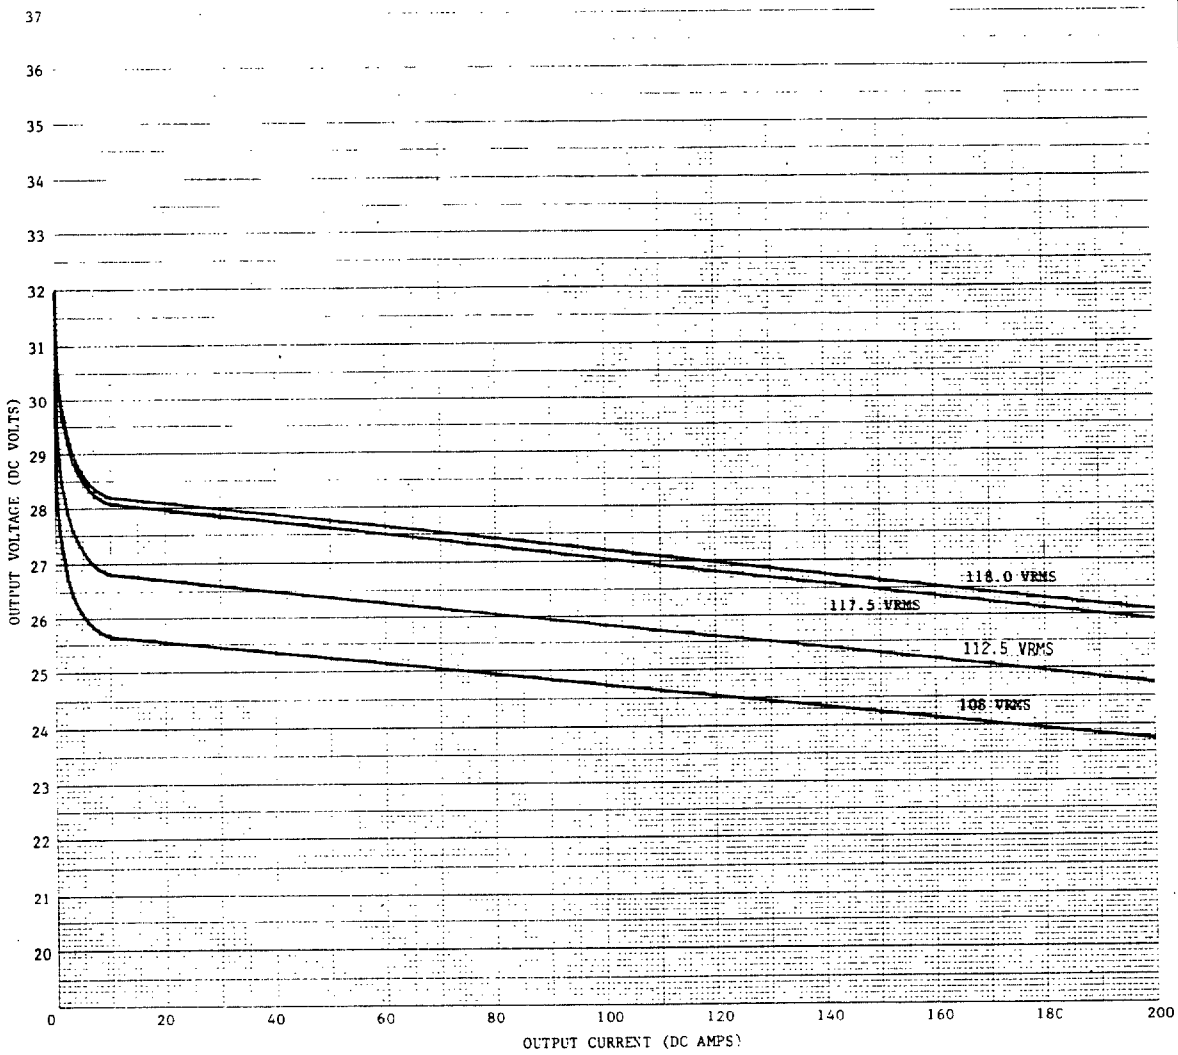

INPUT		108.0 VRMS	112.5 VRMS	117.5 VRMS	118.0 VRMS
OUTPUT	AMPS	MIN. VDC	MIN. VDC	MAX. VDC	MAX. VDC
	*0.0	29.2	30.4	31.7	31.8
	2.0	26.5	27.6	28.9	29.0
	10.0	25.7	26.9	28.1	28.2
	20.0	25.6	26.7	27.9	28.1
	50.0	25.2	26.3	27.5	27.7
	100.0	24.7	25.8	27.0	27.2
	150.0	24.3	25.3	26.6	26.7
	200.0	23.7	24.7	26.0	26.2

FIGURE 2. OUTPUT VOLTAGE LIMITS.

* ZERO LOAD READINGS FOR INFORMATION ONLY.

APPROVED 9 AUG 1960 REVISED (J) FOR CHANGES SEE SHEETS 1, 2 AND 3

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.
This military standard is approved by NAVAL AIR SYSTEMS COMMAND.
Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY — AS Other Cust	TITLE: CONVERTER, 200 AMPERE, CLASS B NONREGULATED, AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28132(AS)
PROCUREMENT SPECIFICATION: MIL-C-7115	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 MAR 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6130

REQUIREMENTS:

THE CONVERTER SHALL MEET THE REQUIREMENTS OF MIL-C-7115 AS MODIFIED BELOW: (PARAGRAPH NUMBERS REFER TO MIL-C-7115)

3.4.1.3.3 COLOR. DELETE "COLOR NUMBER 17875 (WHITE)" OF FIRST SENTENCE AND ADD "COLOR NUMBER 37038 (BLACK".

3.7.1.2.3 OUTPUT STARTING VOLTAGE. ADD TO SECOND SENTENCE: "EXCEPT FOR THE FIRST 5 MILLISECONDS FROM THE ONSET OF THE TRANSIENT, WHEN A MAXIMUM VOLTAGE OF 45 VOLTS SHALL BE ALLOWED".

3.7.1.4.2 TYPE II, NONREGULATED CONVERTERS. ADD: "EXCEPT THE CONDUCTED EMISSIONS REQUIREMENTS OF CE-03, MIL-STD-461 SHALL BE RELAXED 15 AND 25 db RESPECTIVELY FOR THE OUTPUT POSITIVE AND NEGATIVE LEADS AND 10 db FOR THE INPUT LEADS FROM 150 KHz TO 1.0 MHz".

3.7.1.5 ACOUSTICAL NOISE. NOT APPLICABLE.

3.7.2.2 ACCELERATION. NOT APPLICABLE.

3.7.2.9 EXPLOSIVE ATMOSPHERE. NOT APPLICABLE.

4.7.2.2.3 VOLTAGE REGULATION AT MINIMUM TEMPERATURE-ALTITUDE CONDITIONS. DELETE "-30°C" AND REPLACE WITH "-55°C".

4.7.2.15 ACOUSTICAL NOISE. NOT APPLICABLE.

4.7.2.18 ACCELERATION. NOT APPLICABLE.

4.7.2.25 EXPLOSIVE ATMOSPHERE. NOT APPLICABLE.

NOTES:

1. DIMENSIONS ARE IN INCHES. TOLERANCE IS .015 UNLESS OTHERWISE SPECIFIED.
2. THE COMPLETE REQUIREMENTS FOR PROCURING THE CONVERTER DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-C-7115.

APPROVED 9 AUG 1960 REVISED (J) FOR CHANGES SEE SHEETS 1, 2 AND 3

P.A. NAVY — AS Other Cust	TITLE: CONVERTER, 200 AMPERE, CLASS B NONREGULATED, AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28132(AS)
PROCUREMENT SPECIFICATION: MIL-C-7115	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 22008

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED. This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.