FED. SUP CLASS
1560

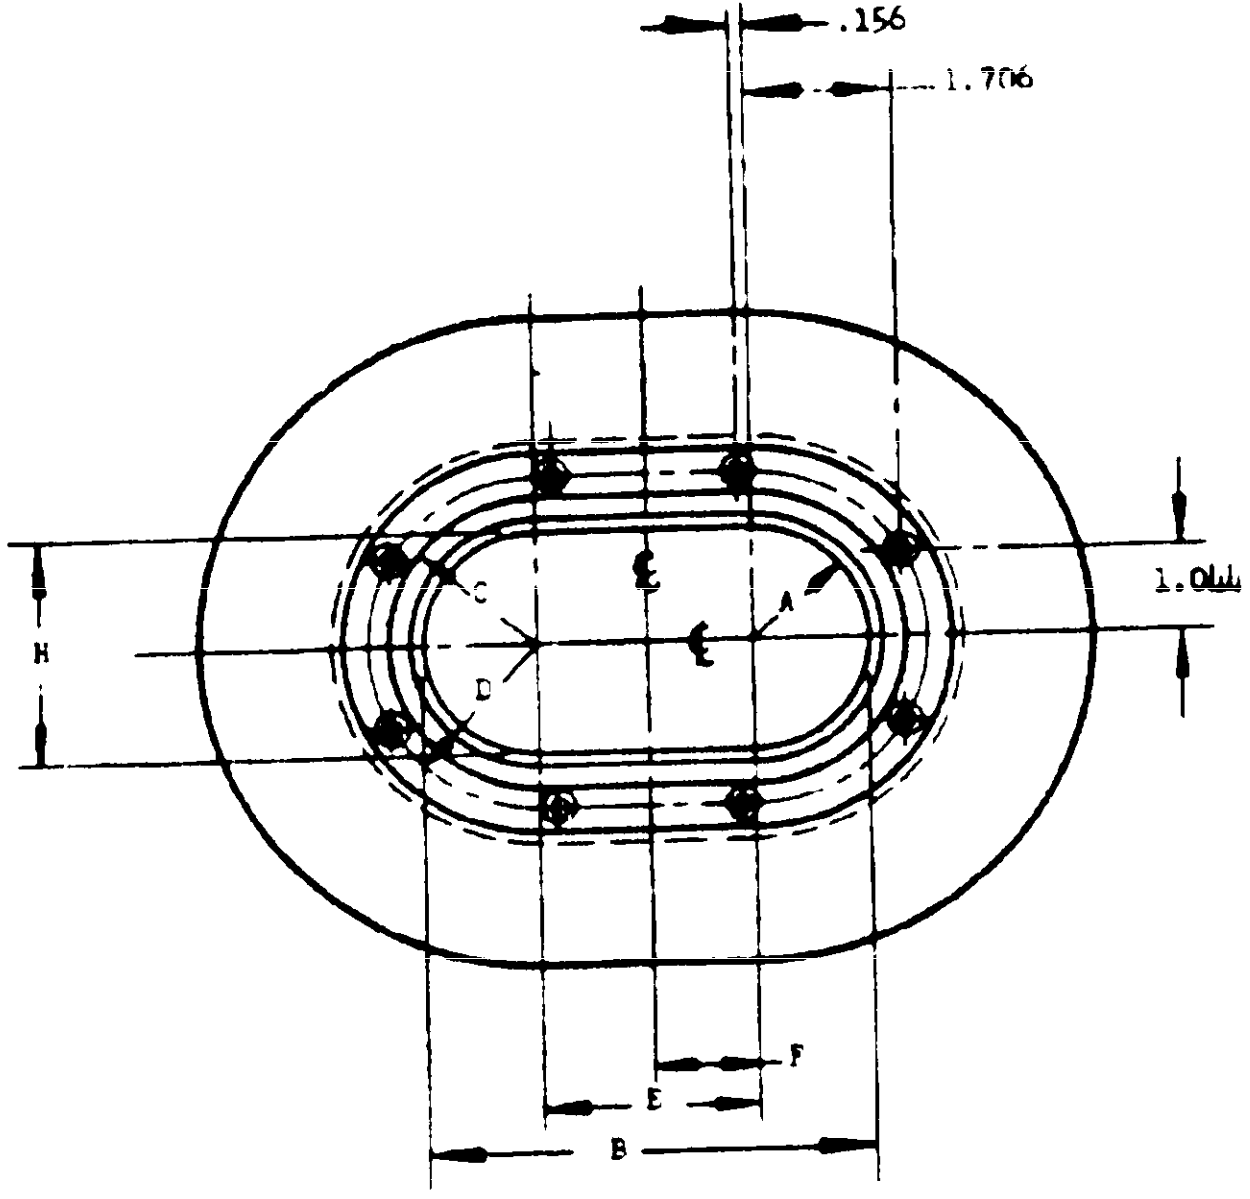

-1

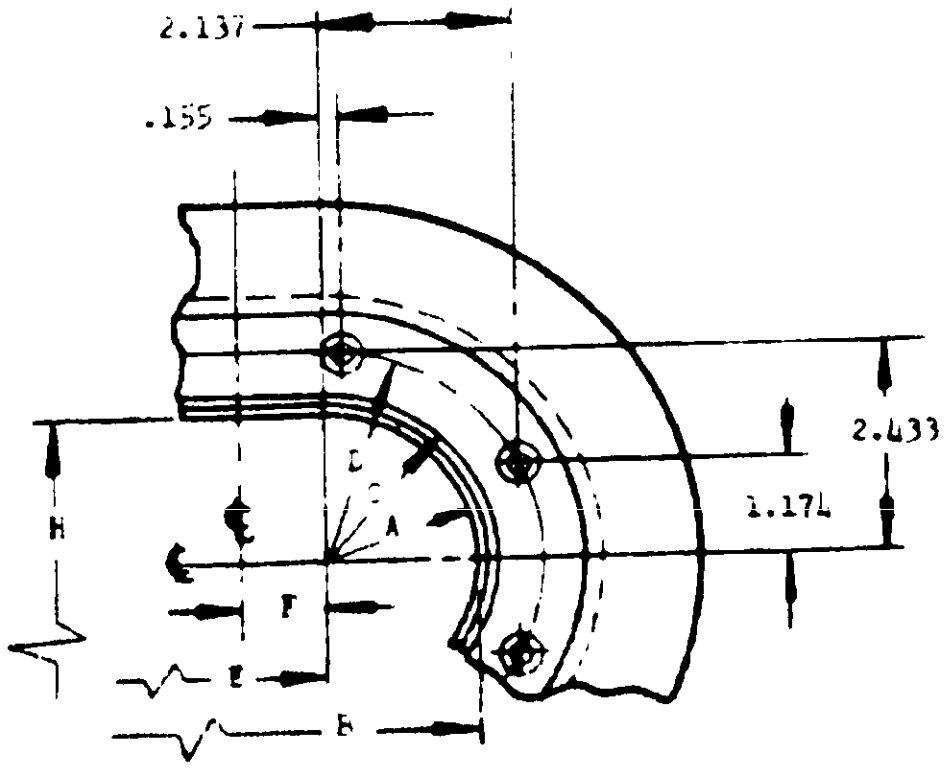

-2

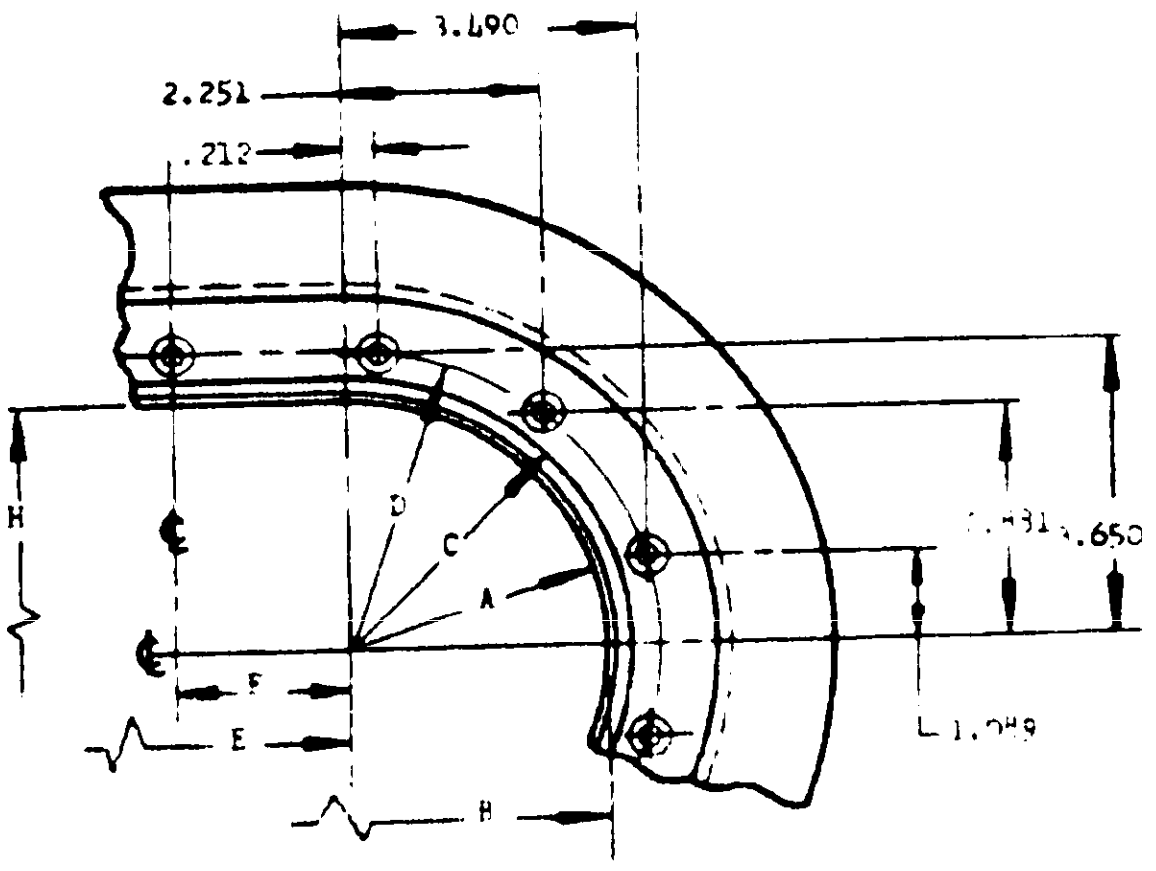

-3

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.

INSERTS SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.

Ⓑ "O" RING GROOVE IN ACCORDANCE WITH MS33581. INSERT DESIGN OPTIONAL
"O"-RING SYMMETRICAL ABOUT CENTERLINES

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓑ FOR [illegible] SEE SHEETS 1&2

APPROVED 2[illegible] Feb 53 REVISED Ⓐ 27 May 59 Ⓑ 30 AUG 74

P.A. **AIR FORCE - 11** Other Cust Army - Navy - **AS**	TITLE Ⓑ FITTING, ATTACHMENT, MOLDED TANK, FLUSH, "O" RING, OVAL	**MILITARY STANDARD** **MS29568**
PROCUREMENT SPECIFICATION MIL-F-6396	SUPERSEDES	SHEET 1 OF 2

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER:
AIR FORCE - 80, 82

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
1560

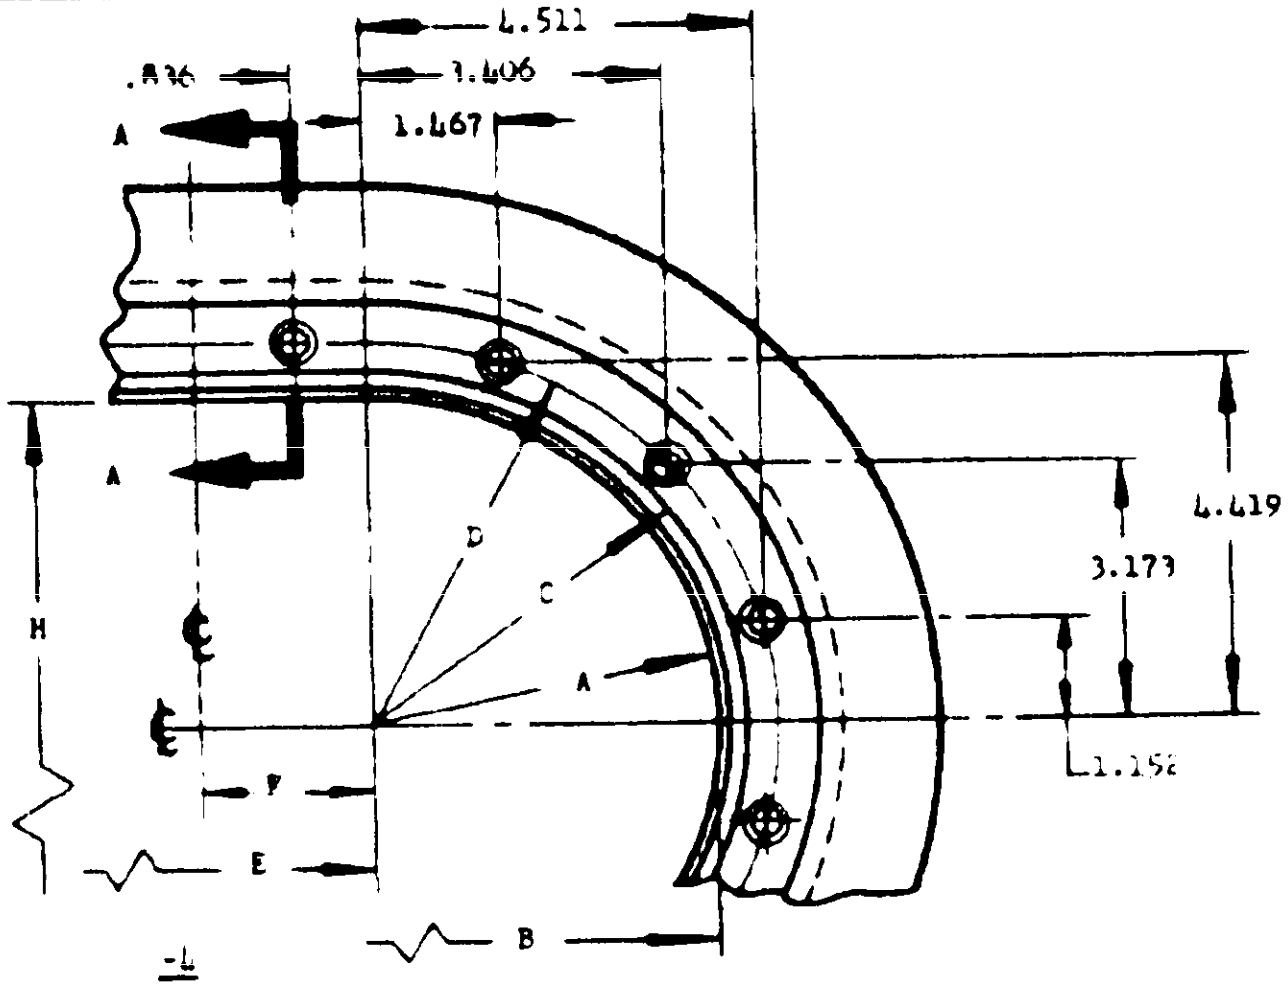

-4

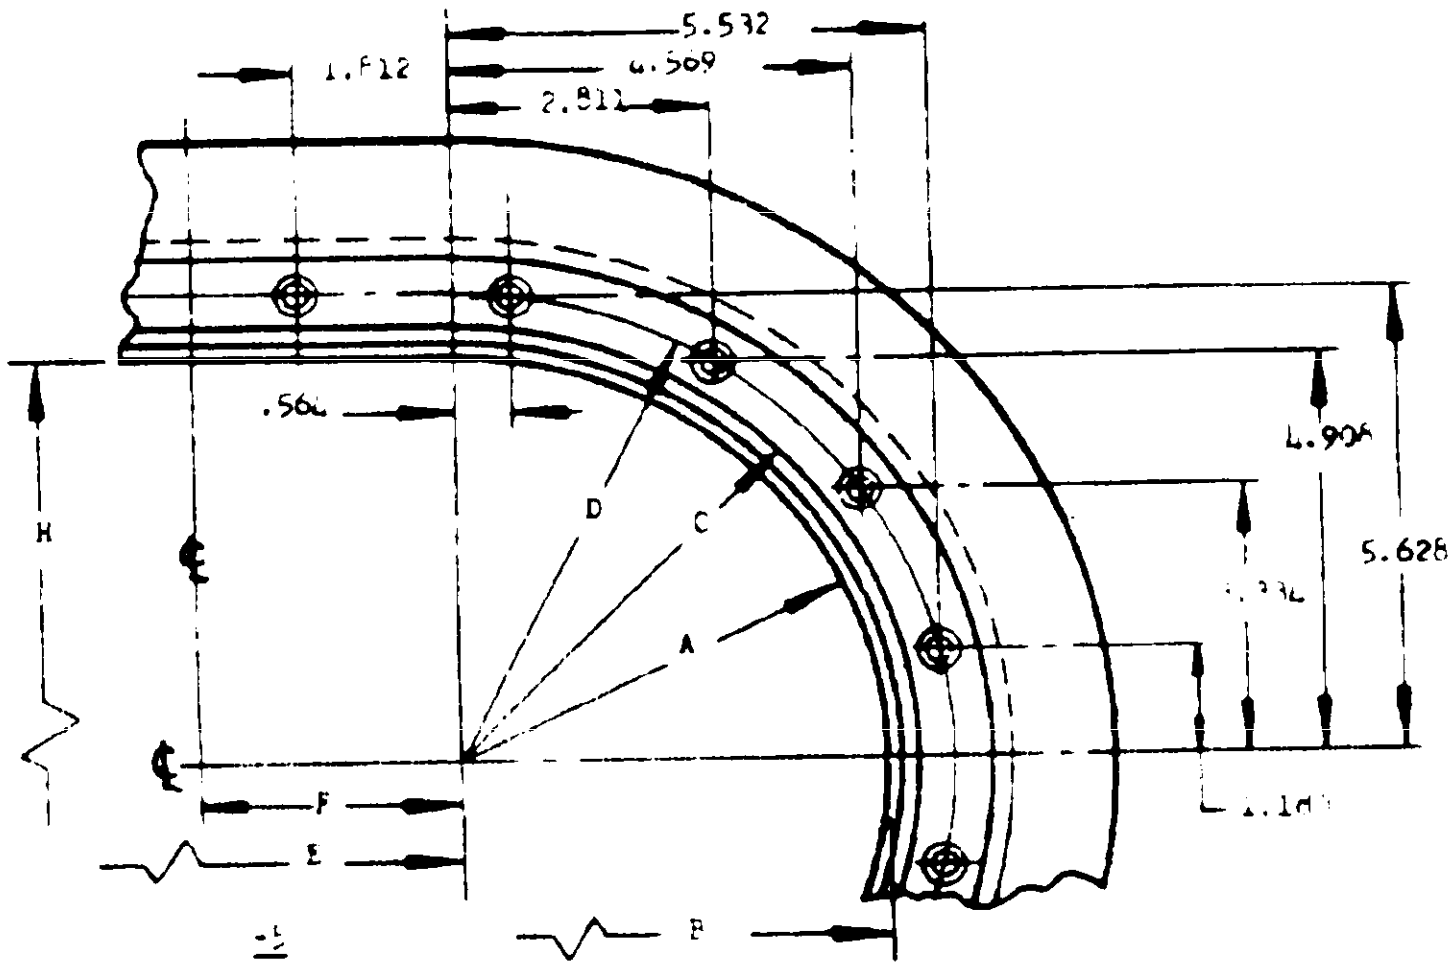

-5

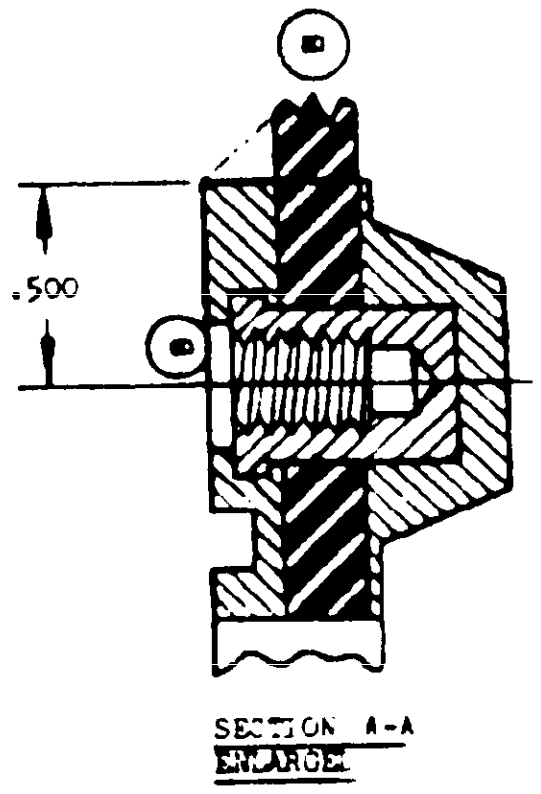

SECTION A-A
ENLARGED

PLAIN GROOVE				GRIP GROOVE				NO. OF INSERTS	O RING		
TYPE I		TYPE II		TYPE I		TYPE II			MS29513	EQUIVALENT OD	
DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN				
-1		-11		01		011		8	-267		
-2		-12		02		012			-268		
-3		-13		03		013		14	-270		
-4		-14		04		014		16		11.170	+.000 -.020
-5		-15		05		015		20		[illegible]	

DASH NO.		SIZE	A +.000 -.020 RAD	B REF	C +.000 -.020 RAD	D RAD	E +.000 -.020	F REF	H REF
PLAIN GROOVE	GRIP GROOVE								
-1, -11	01, -011	2.7[illegible] x [illegible].2[illegible]	1.350	5.200	1.627	2.000	2.500	1.250	2.70[illegible]
-2, -12	02, -012	3.[illegible] x [illegible].7[illegible]	1.750	5.700	[illegible].078	2.1[illegible]	[illegible].240	1.07[illegible]	3.[illegible]
-3, -13	03, -013	[illegible] x [illegible].00	3.000	10.000	3.357	3.656	[illegible].000	2.000	6.[illegible]
-4, -14	04, -014	[illegible] x [illegible].00	[illegible]	12.000	4.312	4.656			[illegible]
-5, -15	05, -015	[illegible] x [illegible]	5.000	16.000	5.312	5.656	6.000	[illegible].000	10.00[illegible]

REVIEWER:
AIR FORCE - 80, 82

REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 2. Feb 58

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. **AIR FORCE - 11** Other Cust Army - Navy - AS	TITLE (B) FITTING, ATTACHMENT, MOLDED TANK, FLUSH, "O" RING, OVAL	**MILITARY STANDARD** MS29568
PROCUREMENT SPECIFICATION MIL-F-6396	SUPERSEDES	SHEET 2 OF 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:03Z
Check the source to verify that this is the currentversion before use.