INCH-POUND

MS3111E
29 April 2009
SUPERSEDING
MS3111D
1 March 2007


DETAIL SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, SOLDER TYPE, CABLE CONNECTING, BAYONET COUPLING, SERIES 1, CLASSES E, F, J AND P

Inactive for new design after 15 December 1998.
For new design, use MS3476.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

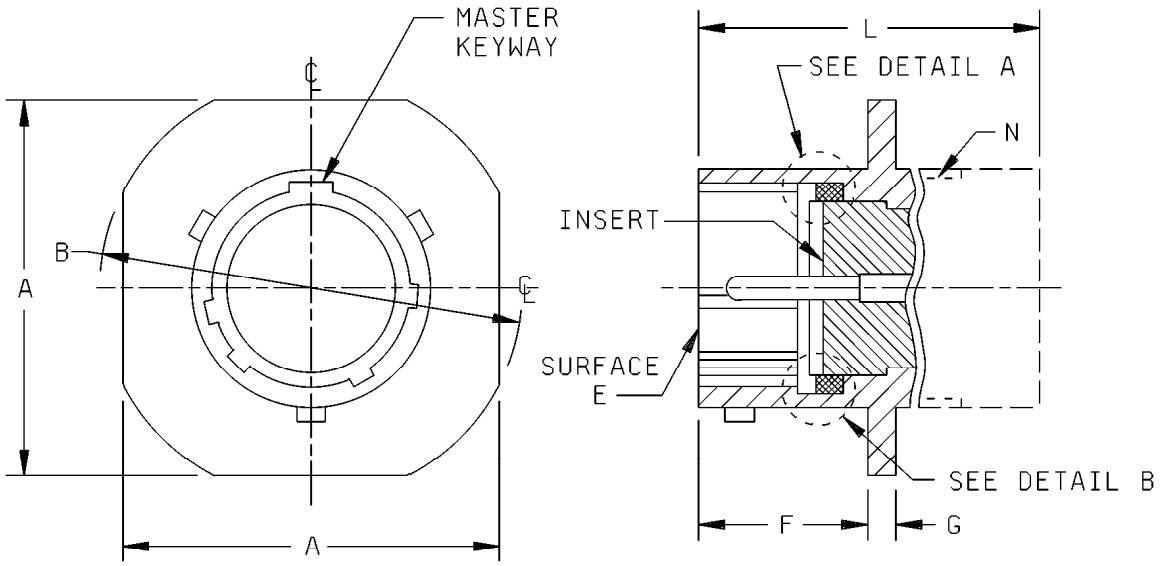

STYLE P
PIN INSERT

FIGURE 1. Plug, classes E, F, J, and P, pin and socket inserts.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

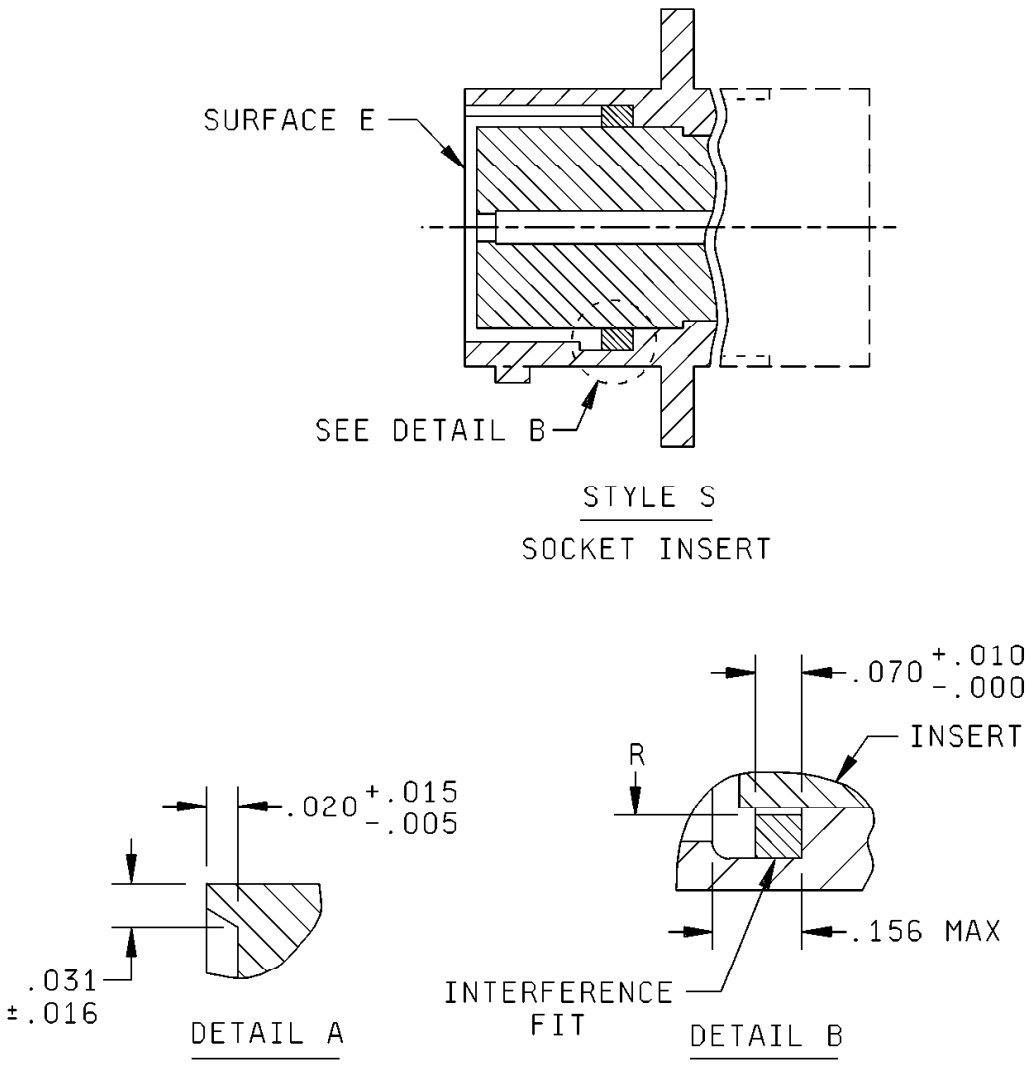


FIGURE 1. Plug, classes E, F, J, and P, pin and socket inserts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

Shell size	A max length	B dia ± .020 across flange corners	F + .031 - .000 mounting flange location	G ± .016 thick mounting flange	N UNEF-2A accessory thread	R max ID gasket
8	.828 (21.03)	.938 (23.83)	.400 (10.16)	.094 (2.39)	.4375-28	.329 (8.36)
10	.954 (24.23)	1.062 (26.97)			.5625-24	.457 (11.61)
12	1.047 (26.59)	1.156 (29.36)			.6875-24	.564 (14.33)
14	1.141 (28.98)	1.250 (31.75)			.8125-20	.689 (17.50)
16	1.234 (31.34)	1.344 (34.14)			.9375-20	.814 (20.68)
18	1.328 (33.73)	1.438 (36.53)			1.0625-18	.907 (23.04)
20	1.453 (36.91)	1.562 (39.67)	.535 (13.59)	.115 (2.92)	1.1875-18	1.039 (26.39)
22	1.578 (40.08)	1.688 (42.88)			1.3125-18	1.164 (29.57)
24	1.700 (43.18)	1.812 (46.02)	.558 (14.17)		1.4375-18	1.289 (32.74)


Inches	mm	Inches	mm
.005	0.13	.020	0.51
.010	0.25	.031	0.79
.015	0.38	.070	1.78
.016	0.41	.156	3.96

INSERT STYLES P AND S

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
3. Intermateability dimensions shall be in accordance with MIL-DTL-26482.

FIGURE 1. Plug, classes E, F, J, and P, pin and socket inserts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

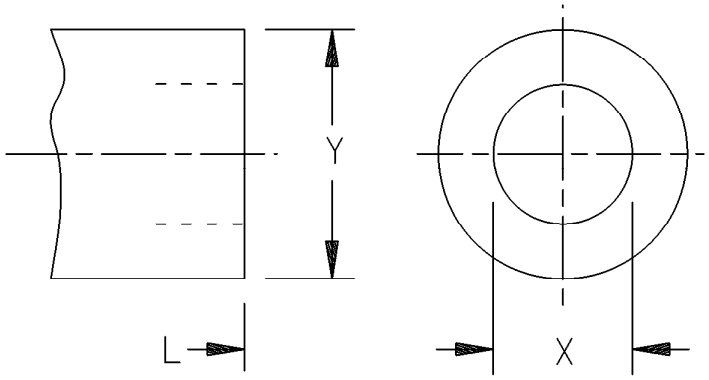


Shell size	L max overall length	X dia min ID	Y dia max OD
8	1.328 (33.73)	.259 (6.58)	.608 (15.44)
10		.359 (9.12)	.734 (18.64)
12		.469 (11.91)	.858 (21.79)
14		.589 (14.96)	.984 (24.99)
16		.727 (18.47)	1.110 (28.19)
18		.779 (19.79)	1.234 (31.34)
20	1.531 (38.89)	.901 (22.89)	1.360 (34.54)
22		1.009 (25.63)	1.484 (37.69)
24	1.594 (40.49)	1.123 (28.52)	1.610 (40.89)


NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
3. Intermateability dimensions shall be in accordance with MIL-DTL-26482.

FIGURE 2. Plug, rear accessories configurations, class E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

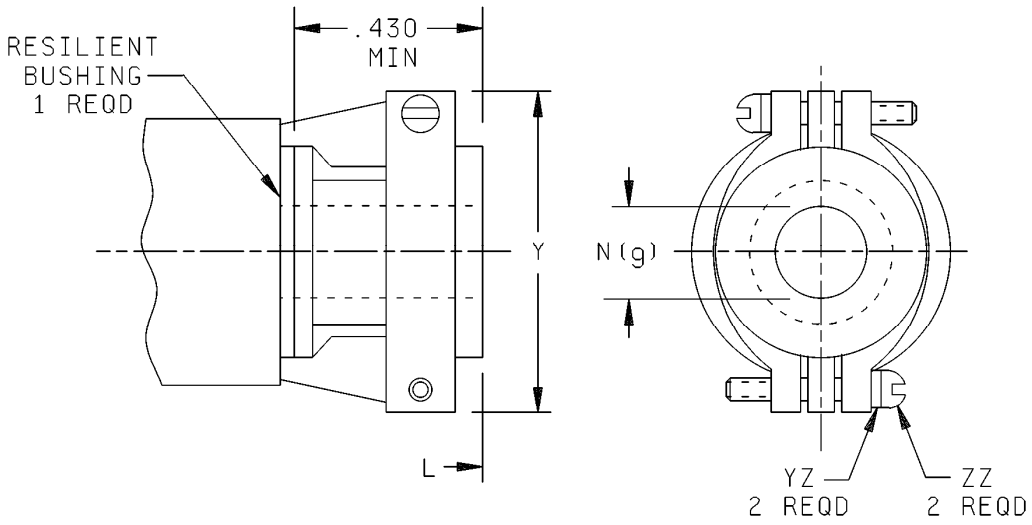

CLASS F, WITH BUSHING

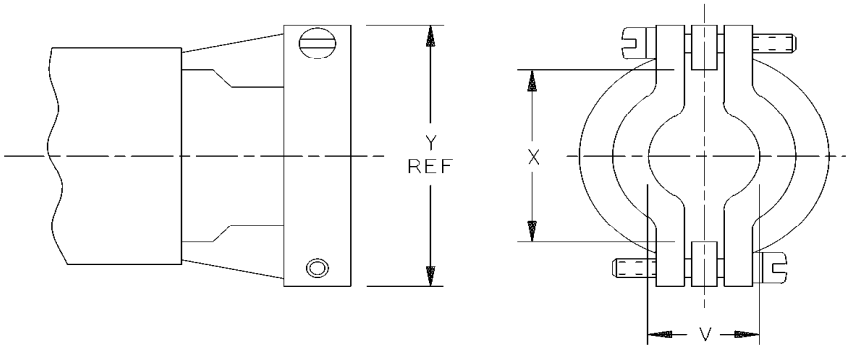

CLASS F, WITH BUSHING REMOVED

FIGURE 3. Plug, rear accessories configurations, class F.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

Shell size	L max overall length	X dia min open	Y dia max	N (see note 4) ± .010 free dia	ZZ screw threads	YZ (see note 5) Lockwashers NASM 35338 or NASM 35333 types
8	1.922 (48.82)	.234 (5.94)	.828 (21.03)	.125 (3.18)	6-32 UNC	NASM 35338 -98 or -41 NASM 35333 -105 or -37
10		.297 (7.54)	.891 (22.63)	.188 (4.78)		
12		.422 (10.72)	1.016 (25.81)	.312 (7.92)		
14		.547 (13.89)	1.161 (29.49)	.375 (9.53)		
16	2.047 (51.99)	.609 (15.47)	1.203 (30.56)	.500 (12.70)		
18	2.078 (52.78)	.734 (18.64)	1.469 (37.31)	.625 (15.88)	8-32 UNC	NASM 35338 -99 or -42 NASM 35333 -106 or -38
20	2.344 (59.54)			.625 (15.88)		
22		.922 (23.42)	1.656 (42.06)	.750 (19.05)		
24	2.406 (61.11)	.984 (24.99)	1.750 (44.45)	.800 (20.32)		

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
3. Intermateability dimensions shall be in accordance with MIL-DTL-26482.
4. Use MS3420 bushing if reduced opening is required.
5. Lockwashers may be captivated.

FIGURE 3. Plug, rear accessories configurations, class F – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

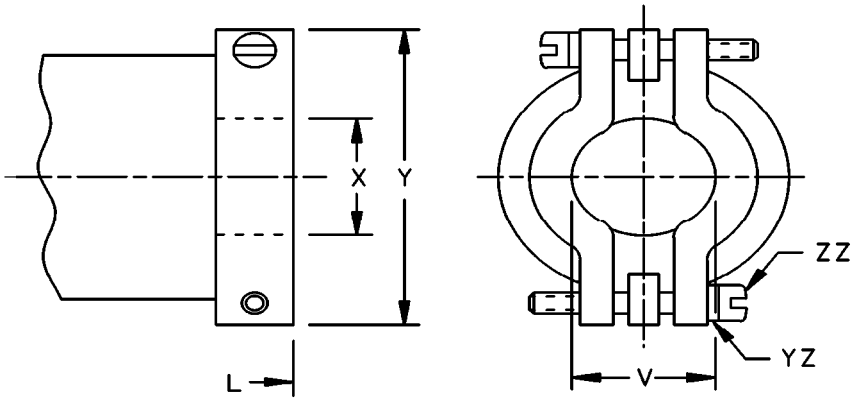


Shell size	L max overall length	V max closed	X ID gland seal min range		Y dia max	ZZ screw threads	YZ (see note 4) Lockwashers NASM35338 or NASM35333 types
			Closed	Open			
8	2.271 (57.68)	.157 (3.99)	.168 (4.27)	.230 (5.84)	.828 (21.03)	6-32 UNC	NASM35338 - 98 or -41 NASM35333- 105 or -37
10		.187 (4.75)	.205 (5.21)	.312 (7.92)	.891 (22.63)		
12	2.411 (61.24)	.281 (7.14)	.338 (8.59)	.442 (11.23)	1.016 (25.81)		
14	2.599 (66.01)	.325 (8.26)	.416 (10.57)	.539 (13.69)	1.141 (28.98)		
16	2.943 (74.75)	.356 (9.04)	.550 (13.97)	.616 (15.65)	1.203 (30.56)		
18	3.172 (80.57)	.456 (11.58)	.600 (15.24)	.672 (17.07)	1.469 (37.31)		
20	3.610 (91.69)	.519 (13.18)	.635 (16.13)	.747 (18.97)		8-32 UNC	NASM35338 -99 or -42 NASM35333- 106 or -38
22	3.766 (95.66)		.670 (17.02)	.846 (21.49)	1.656 (42.06)		
24	3.985 (101.22)	.657 (16.69)	.760 (19.30)	.894 (22.71)	1.750 (44.45)		

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
3. Intermateability dimensions shall be in accordance with MIL-DTL-26482.
4 Lockwashers may be captivated.

FIGURE 4. Plug, rear accessories configurations, class J.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

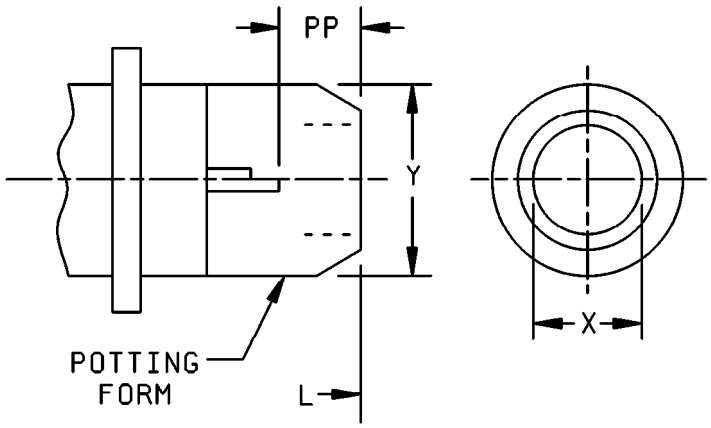

Shell Size	L max overall length	X dia min ID	Y dia max OD	PP min
8	1.453 (36.91)	.317 (8.05)	.608 (15.44)	.250 (6.35)
10		.434 (11.02)	.734 (18.64)	
12		.548 (13.92)	.858 (21.79)	
14		.673 (17.09)	.984 (24.99)	
16		.798 (20.27)	1.110 (28.19)	
18		.899 (22.83)	1.234 (31.34)	
20	1.672 (42.47)	1.024 (26.01)	1.360 (34.54)	
22		1.149 (29.18)	1.686 (42.82)	
24	1.734 (44.04)	1.274 (32.36)	1.610 (40.89)	

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
3. Intermateability dimensions shall be in accordance with MIL-DTL-26482.


FIGURE 5. Plug, rear accessories configurations, class P.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 5.
Connector mating: This connector mates with MS3110, MS3112 through MS3115, MS3119, MS3120, MS3122, MS3124, MS3127 and MS3128.
Intermateability dimensions are in accordance with MIL-DTL-26482.
For insert arrangement: See MIL-STD-1669.
Finishes: When finish W is required, the finish designator shall not be included in the PIN. See MIL-DTL-26482 for other finishes, including D, T and Z, available for classes E, F and P.

Part or Identifying Number (PIN) example:

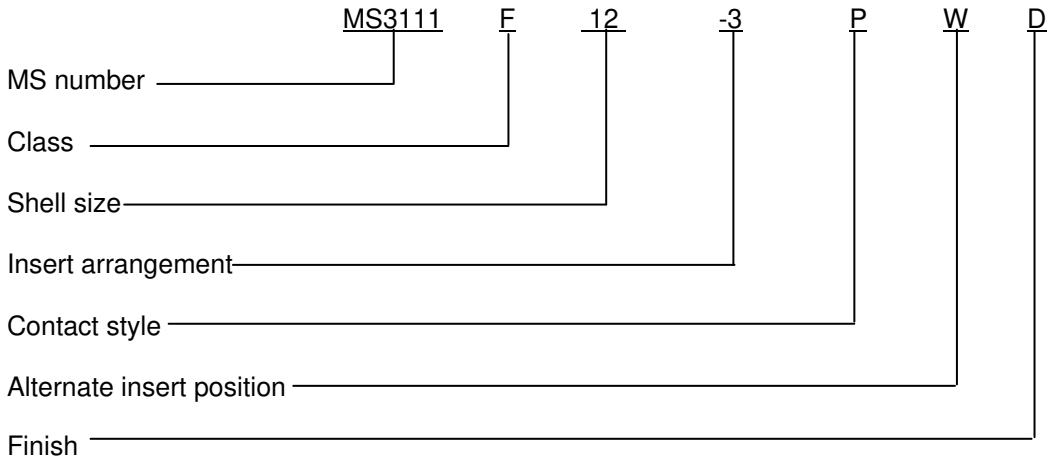

Note: When finish W is required, no finish designator is used (finish W is the default finish).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3110
MS3112
MS3113
MS3114
MS3115
MS3119
MS3120
MS3122
MS3124
MS3127
MS3128
MS3420
MS3476
MIL-STD-1669
ASME Y14.5M
NASM35333
NASM35338

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2007-178)

Review activities:
Army - AV
Navy - EC, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.