This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Navy - AS, USAF - 11, Army - EL

User activities: Army - AV, Navy - , USAF - 11

P.A. Navy - AS
Other Cust
USAF - 11
ARMY - EL

PROCUREMENT SPECIFICATION
MIL-C-26482

SUPERSEDES

TITLE
CONNECTORS, RECEPTACLE ELECTRIC, CRIMP-TYPE, REAR MOUNTING JAM NUT, BAYONET COUPLING

INACTIVE FOR NEW DESIGN AFTER 5 SEP 1975


DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

MILITARY STANDARD

MS3124

SHEET 1 OF 2

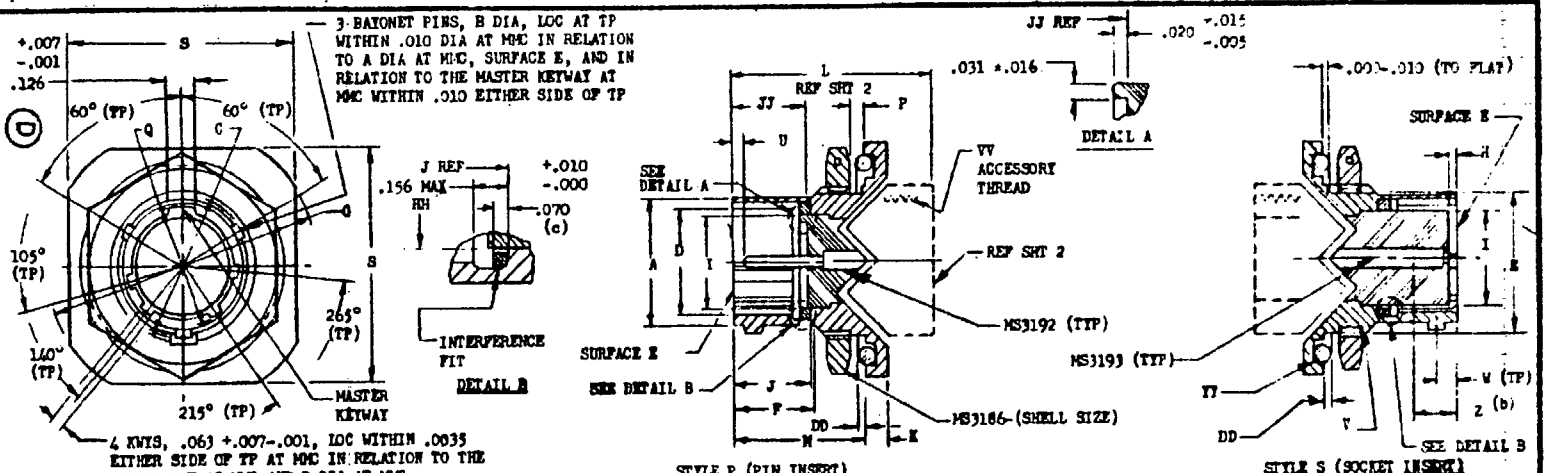


CLASS E, F, P RECEPTACLES

| SIZE | A DIA +.001 -.005 OD | B +.006 -.002 BAY PIN DIA | C DIA +.000 -.016 OVER BAY PINS | D DIA ±.005 -.001 ID | E +.000 -.010 MTG FLAT | F MIN MTG THD LOC | G +.000 -.032 ACROSS FLANGE COR | H +.000 -.020 SOCKET INSERT LOC | I MAX INSERT DIA | J ±.010 PACK-ING LOC | JJ +.000 -.020 PIN INSERT LOC | K ±.020 THK MTG FLANGE | M +.031 -.000 MTG FLANGE LOC | P PANEL THK REF MIN | P PANEL THK REF MAX | Q DIA +.005 -.006 OVER KEY-WAYS | S MAX LENGTH SIDE | U +.010 -.020 PIN CONTACT LOC | V CLASS 2A MOUNT-ING THREAD | W (TP) BAY PIN LOC | X (b) +.000 -.078 SOCKET CONTACT SPRING LOC | YY O-RING SEAL | VV CLASS 2B ACCESS THD | INSERT ARR (REF) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 8 | .473 | .078 | .563 | .362 | .530 | .384 | 1.078 | .025 | .285 | .382 | .332 | .117 | .691 | .062 | .125 | .412 | .954 | .085 | 9/16-24 | .100 | .153 | MS29513-17 | 5/8-24 | MS33708 |
| 10 | .590 | | .680 | .490 | .655 | | 1.203 | | .402 | | | | | | | .540 | 1.078 | | 11/16-24 | | | MS29513-19 | 3/4-20 | MS33709 |
| 12 | .750 | | .859 | .669 | .818 | | 1.391 | | .516 | | | | | | | .689 | 1.266 | | 7/8 -20 | | | MS29513-22 | 7/8-20 | MS33710 |
| 14 | .875 | | .984 | .732 | .942 | | 1.516 | | .641 | | | | | | | .814 | 1.391 | | 1 -20 | | | MS29513-24 | 1-20 | MS33711 |
| 16 | 1.000 | | 1.108 | .857 | 1.066 | | 1.641 | | .766 | | | | | | | .939 | 1.516 | | 1-1/8-18 | | | MS29513-26 | 1-1/8-18 | MS33712 |
| 18 | 1.125 | | 1.233 | .982 | 1.191 | | 1.766 | | .855 | | | | | | | 1.039 | 1.641 | | 1-1/4-18 | | | MS29513-28 | 1-1/4-18 | MS33713 |
| 20 | 1.250 | | 1.358 | 1.087 | 1.316 | .446 | 1.954 | .087 | .980 | .444 | .394 | .168 | .879 | | .250 | 1.164 | 1.828 | .147 | 1-3/8-18 | | .215 | MS29513-120 | 1-3/8-18 | MS33714 |
| 22 | 1.375 | | 1.483 | 1.212 | 1.441 | | 2.078 | | 1.105 | | | | | | | 1.289 | 1.954 | | 1-1/2-18 | | | MS29513-130 | 1-1/2-18 | MS33715 |
| 24 | 1.500 | .125 | 1.610 | 1.337 | 1.566 | .479 | 2.203 | | 1.229 | | | | .912 | | | 1.414 | 2.078 | | 1-5/8-18 | .109 | | MS29513-132 | 1-5/8-18 | MS33716 |

(a) DIMENSIONS IN INCHES
(b) DISTANCE BETWEEN END OF SHELL AND THE POINT AT WHICH A GAGE PIN HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE FIRST ENGAGES SOCKET CONTACT SPRING
(c) PACKING MATERIAL SHALL MEET THE REQUIREMENTS OF MIL-STD-417
(d) TRUE POSITION (TP) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH MIL-STD-8
(e) MATERIAL: SHELL-ALUMINUM ALLOY: BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(f) EXAMPLE OF PART NUMBER: MS3124 E 12 - 9 P W

MS3124 E 12 - 9 P W
MS NUMBER | CLASS | SIZE | INSERT ARRANGEMENT | CONTACT STYLE | ALTERNATE INSERT POSITION

| SIZE | DD ±.011 O-RING PROJECTION | EE MAX ID GASKET | FF +.010 -.005 PANEL MTG HOLE | GG +.010 -.005 PANEL FLAT LOC |
|---|---|---|---|---|
| 8 | .023 | .329 | .572 | .540 |
| 10 | | .457 | .697 | .665 |
| 12 | | .564 | .885 | .828 |
| 14 | | .689 | 1.010 | .952 |
| 16 | | .814 | 1.135 | 1.076 |
| 18 | | .907 | 1.260 | 1.201 |
| 20 | .028 | 1.033 | 1.385 | 1.326 |
| 22 | | 1.164 | 1.510 | 1.451 |
| 24 | | 1.289 | 1.635 | 1.576 |

PANEL MTG DIMS REF

FED. SUP CLASS 5935

(D) FOR CHANGES SEE SHEETS 1 AND 2.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 5 Oct 61 REVISED (A) 18 Jul 62 (B) 24 Aug 62 (C) 15 [illegible] 67 (D) 5 SEP 1975

5935-1947-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Army - ML, MU, MT
Navy - AS, SH
USAF - 17

User activities:
Army - AV
Navy -
USAF - 11

DD FORM 672-1 (Coordinated)

PROCUREMENT SPECIFICATION
MIL-C-26482

P.A. Navy - AS
Other Cust
USAF - 11
Army - ML

SUPERSEDES

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC, CRIMP-TYPE, REAR MOUNTING JAM NUT, BAYONET COUPLING


MILITARY STANDARD

MS3124

SHEET 2 OF 2


FED. SUP CLASS
5935

CLASS E




| SIZE | L MAX OVER-ALL LENGTH | X DIA MIN I.D. | Y DIA MAX O.D. |
|---|---|---|---|
| 8 | 1.547 | .259 | .750 |
| 10 | | .359 | .875 |
| 12 | | .469 | 1.000 |
| 14 | | .589 | 1.125 |
| 16 | | .717 | 1.250 |
| 18 | | .779 | 1.375 |
| 20 | 1.709 | .901 | 1.531 |
| 22 | | 1.009 | 1.656 |
| 24 | | 1.123 | 1.781 |


CLASS F

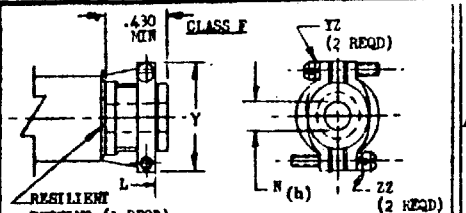


| SIZE | L MAX OVER-ALL LENGTH | X DIA MIN OPEN | Y MAX | V MAX CLOSED |
|---|---|---|---|---|
| 8 | 2.422 | .234 | .828 | .187 |
| 10 | | .297 | .891 | .187 |
| 12 | | .422 | 1.016 | .281 |
| 14 | | .547 | 1.141 | .325 |
| 16 | 2.537 | .609 | 1.203 | .356 |
| 18 | | .734 | 1.469 | .456 |
| 20 | 2.824 | | | .519 |
| 22 | | .922 | 1.656 | |
| 24 | 2.900 | .984 | 1.750 | .657 |


| SIZE | (g) N FREE DIA ±.010 | ZZ SCREW THREADS | (h) YZ LOCKWASHERS |
|---|---|---|---|
| 8 | .110 | 6-32UNC | AN935B6L OR -6L<br>AN936-A6B OR -A6 |
| 10 | .173 | | |
| 12 | .297 | | |
| 14 | .360 | | |
| 16 | .485 | | |
| 18 | .610 | 8-32UNC | AN935B8L OR -8L<br>AN936-A8B OR -A8 |
| 20 | .610 | | |
| 22 | .735 | | |
| 24 | .785 | | |

DIMENSIONS WITH BUSHING REMOVED




(g) USE MS3420 BUSHINGS IF REDUCED OPENING IS REQD.
(h) LOCKWASHERS MAY BE CAD. PL.

CLASS F

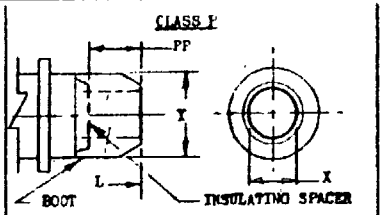


| SIZE | L MAX OVER-ALL LENGTH | X DIA MIN | Y DIA MAX | PP MIN |
|---|---|---|---|---|
| 8 | 1.675 | .317 | .608 | .250 |
| 10 | | .438 | .734 | |
| 12 | | .548 | .858 | |
| 14 | | .673 | .984 | |
| 16 | | .798 | 1.110 | |
| 18 | | .829 | 1.234 | |
| 20 | 1.963 | 1.024 | 1.360 | |
| 22 | 1.963 | 1.149 | 1.484 | |
| 24 | 2.025 | 1.274 | 1.610 | |

APPROVED 5 Oct 61

REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

5935-1947-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.