This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, Navy - SH, Air Force - 17

User activities: Army - AV, Navy -, Air Force -

DD FORM 1 MAY 73 672 (Coordinated/previous editions of this form are obsolete)

P.A Navy - AS

Other Cust USAF - 11, Army - EL

Procurement Specification MIL-C-26482

International interest

SUPERSEDES:


TITLE CONNECTORS, PLUG, ELECTRIC, CRIMP TYPE, STRAIGHT, BAYONET COUPLING

MS3126

MILITARY STANDARD

PAGE 1 OF 3

5935-3006-9

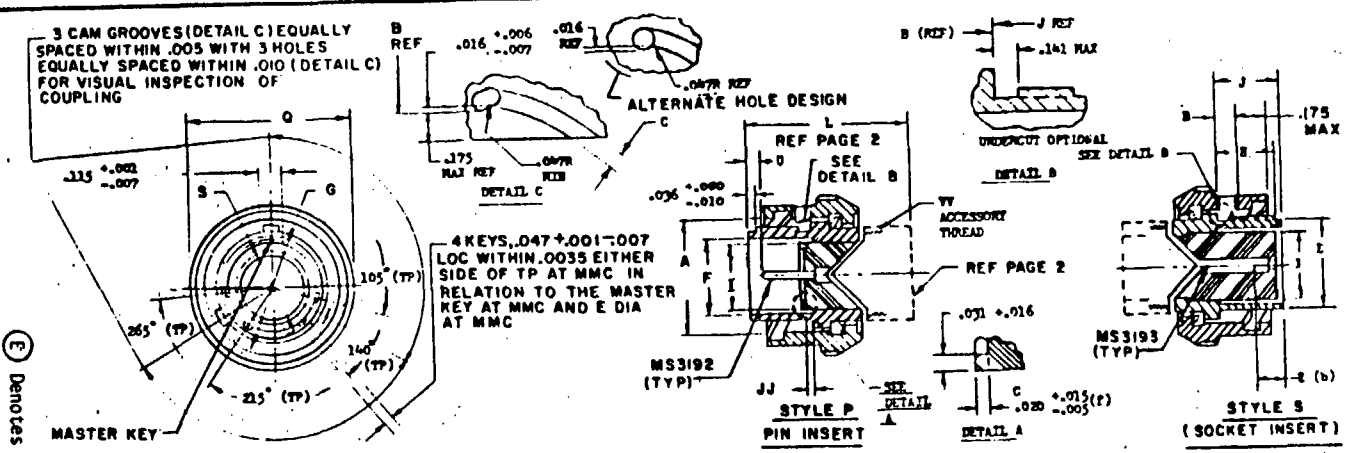

Ⓔ Denotes change

CLASS E, F, P PLUGS Ⓔ

SIZE	A DIA +.005 -.001 CPLG ID	B .020 BAY LOCK LOC	C +.016 -.001 BAY GROOVE WIDTH	E DIA +.001 -.005 OD	F DIA MIN ID	G DIA +.005 -.006 ID SLOTS	H +.020 -.000 SOCKET INSERT LOC	I MAX INSERT DIA	J ±.010 SHOULDER LOC	JJ +.020 -.000 PIN INSERT LOC	Q MAX DIA OVERALL	S +.001 -.010 DIA OVER KEYS	U +.010 -.020 PIN CONTACT LOC	Z(b) +.000 -.078 SOCKET CONTACT SPRING LOC	VV CLASS-2A ACCESSORY THREAD	INSERT ARRANGEMENT (REF)
8	.481	.113	.090	.357	.292	.576	.337	.285	.353	.030	.782	.402	.075	.143	7/16-28	MS33708
10	.702			.435	.409	.697		.402			.926	.530			9/16-24	MS33709
12	.761			.597	.523	.871		.516			1.043	.679			11/16-24	MS33710
14	.885			.722	.648	.995		.641			1.183	.804			13/16-20	MS33711
16	1.010			.847	.772	1.120		.766			1.305	.929			15/16-20	MS33712
18	1.136			.947	.862	1.245		.855			1.391	1.029			1 1/16-18	MS33713
20	1.260			1.072	.987	1.370		.980			1.531	1.154			1 3/16-18	MS33714
22	1.385			1.197	1.111	1.495	.399	1.105	.415	.092	1.656	1.279			1 5/16-18	MS33715
24	1.510	.152	.137	1.322	1.237	1.624		1.229			1.777	1.404			1 7/16-18	MS33716

INACTIVE FOR NEW DESIGN AFTER 5 SEP 1975 USE MS3476

FED. SUP CLASS 5935

APPROVED 5 Oct 61

REVISED (A) 18 Jul 62 (B) 24 Aug 62 (C) 15 Feb 67 (D) 5 Sep 75 (E) 31 July 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - SH
Air Force - 17

User activities: Army - AV
Navy -
Air Force -

P.A Navy - AS
Other Cust
USAF - 11
Army - EL

Procurement Specification
MIL-C-26482

SUPERSEDES:

TITLE
CONNECTORS, PLUG, ELECTRIC, CRIMP TYPE, STRAIGHT, BAYONET COUPLING

MILITARY STANDARD
MS3126


PAGE 2 OF 3

DD FORM 1 MAY 73 672 (Coordinated) previous editions of this form are obsolete

5935-3006-9


FED. SUP CLASS
5935

CLASS R



SIZE	L MAX OVER-ALL LENGTH	X DIA MIN ID	Y DIA MAX OD
8	2.513	.359	.608
10		.359	.734
12		.469	.858
14		.589	.984
16		.717	1.110
18		.779	1.234
20	1.638	.901	1.360
22		1.009	1.484
24		1.127	1.610


CLASS P



SIZE	L MAX OVER-ALL LENGTH	X DIA MIN OPEN	Y MAX	W MAX CLOSED
8	2.613	.834	.828	.187
10		.897	.891	
12		.022	1.016	.281
14		.597	1.141	.325
16	2.526	.609	1.203	.356
18		.734	1.469	.456
20	2.753			.519
22		.922	1.656	
24	2.830	.984	1.750	.657

SIZE	W (f) ±.010 FREE	ZZ SCREW THREADS	YZ (g) LOCKWASHERS
8	.125	6-32UNC	AN935861 OR -61 AN936-A8B OR -A6
10	.188		
12	.312		
14	.375		
16	.500		
18	.625	8-32UNC	AN935881 OR -81 AN936-A8B OR -A8
20	.625		
22	.750		
24	.800		

DIMENSIONS WITH BUSHING REMOVED



(f) USE MS3420 BUSHINGS IF REDUCED OPENING IS REQD
(g) LOCKWASHERS MAY BE CAPTIVE

CLASS P



L MAX OVER-ALL LENGTH	X DIA MIN ID	Y DIA MAX OD	PP MIN
1.750	.317	.608	.250
	.430	.734	
	.548	.858	
	.673	.984	
	.798	1.110	
	.899	1.234	
1.992	1.024	1.360	
	1.149	1.484	
1.953	1.274	1.610	


APPROVED 5 Oct 61

REVISED (E) For changes see page 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.415	10.54	1.010	25.65
.005	.13	.485	12.32	1.029	26.14
.006	.15	.516	13.11	1.043	26.49
.007	.18	.523	13.28	1.072	27.23
.010	.25	.530	13.46	1.105	28.07
.015	.38	.576	14.63	1.111	28.22
.016	.41	.597	15.16	1.120	28.45
.020	.51	.602	15.29	1.136	28.85
.030	.76	.641	16.28	1.154	29.31
.031	.79	.648	16.46	1.183	30.05
.036	.91	.679	17.25	1.197	30.40
.075	1.90	.697	17.70	1.229	31.22
.090	2.29	.722	18.34	1.237	31.42
.092	2.34	.761	19.33	1.245	31.62
.113	2.87	.766	19.46	1.260	32.00
.115	2.92	.772	19.61	1.279	32.49
.137	3.48	.782	19.86	1.305	33.15
.141	3.58	.804	20.42	1.322	33.58
.143	3.63	.847	21.51	1.370	34.80
.152	3.86	.855	21.72	1.385	35.18
.175	4.44	.862	21.89	1.391	35.33
.285	7.24	.871	22.12	1.404	35.66
.292	7.42	.885	22.48	1.495	37.97
.337	8.56	.926	23.52	1.510	38.35
.353	8.97	.929	23.60	1.531	38.89
.357	9.07	.947	24.05	1.624	41.25
.399	10.13	.980	24.89	1.656	42.06
.402	10.21	.987	25.07	1.777	45.14
.409	10.39	.995	25.27		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Distance between end of shell and the point at which a gage pin having the same basic diameter as the mating contact and a square face first engages socket contact spring.
4. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
5. Material: Shell and coupling ring - aluminum alloy
6. Example of part number:

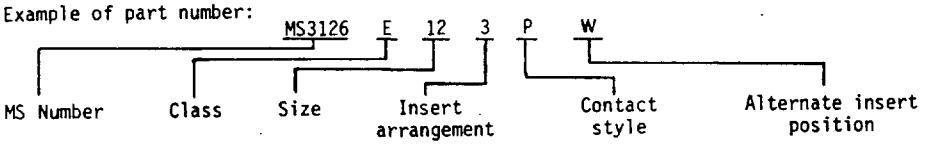

7. For design feature purposes this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. Use MS3476 for new design. MS3476 is interchangeable for use except for the following:
   a. MS3476 utilizes rear release contacts whereas MS3126 utilizes front release contacts.

APPROVED 5 OCT 61
REVISED (E) For changes see page 1

User activities: Army - AV
Navy -
Air Force -

Review activities: Army - AR
Navy - SH 17
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - AS Other Cust USAF - 11 Army - EL	International Interest	TITLE CONNECTORS, PLUG, ELECTRIC, CRIMP TYPE, STRAIGHT, BAYONET COUPLING	MILITARY STANDARD MS3126
Procurement Specification MIL-C-26482		SUPERSEDES:	PAGE 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.